



**THE DATASHEET OF
TW-06-01-F-S-160-095**



DO NOT SCALE FROM THIS PRINT

LEAD STYLE	TERMINAL	OVERALL LENGTH	"L"	"C"
-01	T-1S13-20-X-2	.3228	[8.199]	.100 [2.54]
-02	T-1S13-02-X-2	.3770	[9.576]	.150 [3.81]
-03	T-1S13-03-X-2	.5347	[13.581]	.150 [3.81]
-04	T-1S13-06-X-2	.5550	[14.097]	.100 [2.54]
-05	T-1S13-09-X-2	.5940	[15.088]	.100 [2.54]
-06	T-1S13-10-X-2	.6730	[17.094]	.100 [2.54]
-07	T-1S13-11-X-2	.7510	[19.075]	.100 [2.54]
-08	T-1S13-12-X-2	.8300	[21.082]	.100 [2.54]
-09	T-1S13-13-X-2	.4560	[11.582]	.100 [2.54]
-10	T-1S13-14-X-2	.6140	[15.596]	.100 [2.54]
-11	T-1S13-05-X-2	.3970	[10.084]	.100 [2.54]
-12	T-1S13-16-X-2	1.110	[28.194]	.100 [2.54]

NOTE: LEAD STYLE -08 & -12 NOT AVAILABLE IN -T, -Q-5 & 6 ROW OPTION.

TW-XX-XX-X-X-XXX-XXX-XXX-XX

No. OF POSITIONS EXPRESSED IN # OF POS. -01 THRU -50 "XX"= No. OF POS. X .07874 [2.00]

LEAD STYLE (SEE TABLE 1) (SEE *NOTE)

OPTION ** -MW: METAL WASHER (NOT AVAILABLE IN -12 LEAD STYLE) (NOT AVAILABLE FOR -S VERSION) (SEE FIG. 2, SHT. 3) (.090 [2.29] MIN TAIL) (.300 [7.62] MAX TAIL ONLY FOR -T & -TL OPTIONS.) (ALL -MW OPTIONS ARE TO BE TUBED)


POLARIZATION OPTION SPECIFY POS. TO BE REMOVED (SEE FIGURE 1)

TAIL LENGTH

SPACE OPTION -S, -D, -Q: (.120 MIN.) -T, -5, -6: (.160 MIN.) MAX = 'L' - .050

ROW OPTION -S: SINGLE (USE BODY TMM-50-S) -D: DOUBLE (USE BODY TMM-50-D) .120-.1599 BOARD SPACE (ABOVE .160 MIN USE BODY TMMC-50-D) (CAN SUB TMMH-50-D OR TMMH-50-D-LC FOR TMMC-50-D) -T: TRIPLE (USE BODY TMMH-50-T) -Q: QUAD (USE BODY TMM-50-Q) -5: FIVE ROW (USE BODY TMMH-50-5) -6: SIX ROW (USE BODY TMMH-50-6)

FIG 1 SCALE: .75x (SEE NOTE 6)

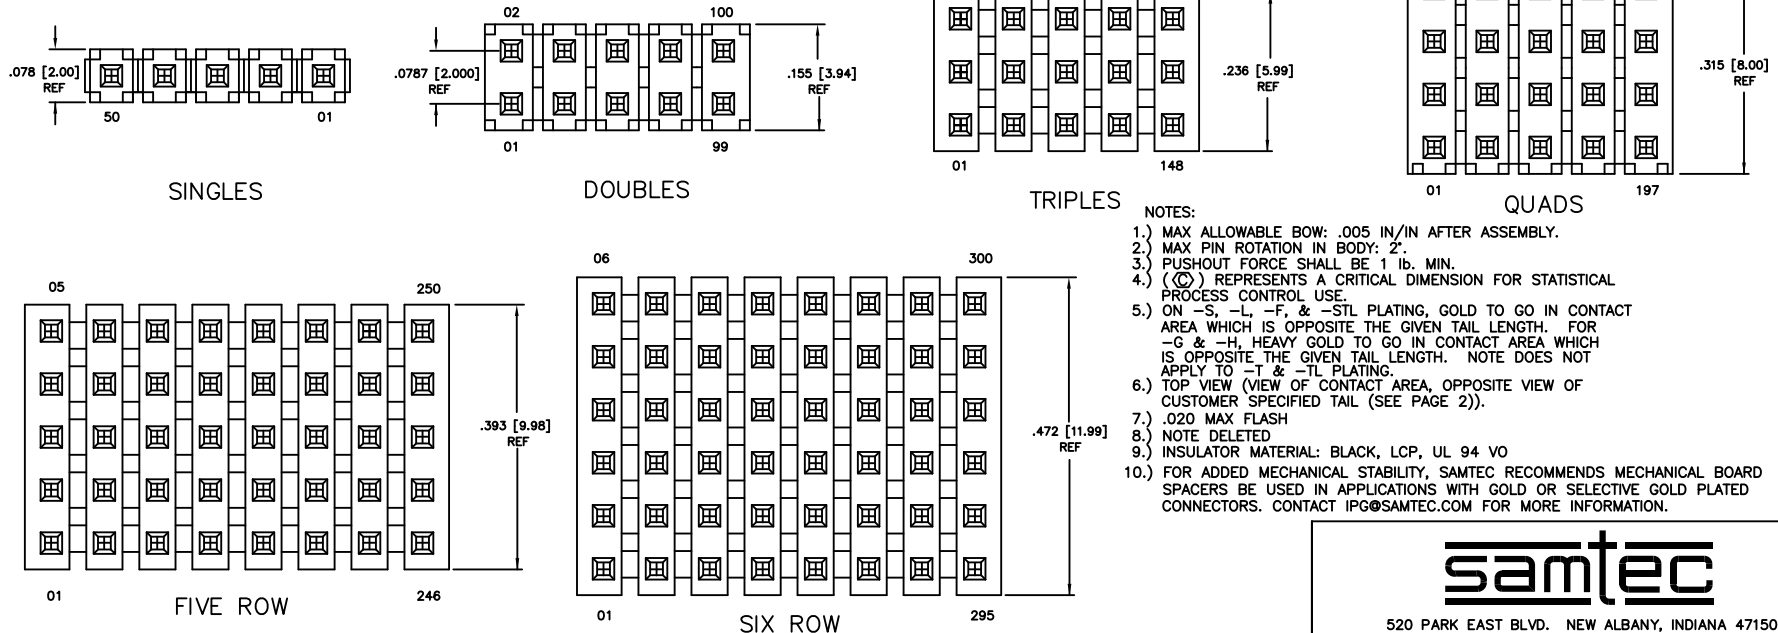

** - MW OPTION, DO NOT DESIGN IN. SAMTEC WILL ONLY SUPPORT EXISTING BUSINESS 2/07/02.

- NOTES:
- 1.) MAX ALLOWABLE BOW: .005 IN/IN AFTER ASSEMBLY.
 - 2.) MAX PIN ROTATION IN BODY: 2°.
 - 3.) PUSHOUT FORCE SHALL BE 1 lb. MIN.
 - 4.) (C) REPRESENTS A CRITICAL DIMENSION FOR STATISTICAL PROCESS CONTROL USE.
 - 5.) ON -S, -L, -F, & -STL PLATING, GOLD TO GO IN CONTACT AREA WHICH IS OPPOSITE THE GIVEN TAIL LENGTH. FOR -G & -H, HEAVY GOLD TO GO IN CONTACT AREA WHICH IS OPPOSITE THE GIVEN TAIL LENGTH. NOTE DOES NOT APPLY TO -T & -TL PLATING.
 - 6.) TOP VIEW (VIEW OF CONTACT AREA, OPPOSITE VIEW OF CUSTOMER SPECIFIED TAIL (SEE PAGE 2)).
 - 7.) .020 MAX FLASH
 - 8.) NOTE DELETED
 - 9.) INSULATOR MATERIAL: BLACK, LCP, UL 94 VO
 - 10.) FOR ADDED MECHANICAL STABILITY, SAMTEC RECOMMENDS MECHANICAL BOARD SPACERS BE USED IN APPLICATIONS WITH GOLD OR SELECTIVE GOLD PLATED CONNECTORS. CONTACT IPG@SAMTEC.COM FOR MORE INFORMATION.

FIG 1

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC INC. AND SHALL NOT BE REPRODUCED OR TRANSMITTED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC INC.



Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View TW-06-01-F-S-160-095 on WIN SOURCE](#)

 [Samtec Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management