



**THE DATASHEET OF
KFF6450A**



Features

- Low Loss
- Excellent Low Side Rejection
- Small Size

Description

Surface mount, silver (Ag) coated ceramic filter. Developed for use in InMarSat applications.

Weight: 1.2 grams typical.

Material: Filter is composed of a ceramic block plated with Ag.

Filter complies with RoHS standards.



Electrical Specifications

Parameter	Frequency (MHz)	Typical @ 25°C	Spec. @ 25°C	Spec. Over -40°C to +85°C
Passband Insertion Loss	1626.5 to 1660.5	1.36 dB	2.2 dB max	2.5 dB max
Passband Ripple	1626.5 to 1660.5	0.4 dB	0.8 dB max	1.0 dB max
Passband Return Loss @ Input	1626.5 to 1660.5	14.0 dB	10.0 dB min	9.5 dB max
Attenuation:	1576.5	38.0 dB	30.5 dB min	30.0 dB max
	1751.5	26.9 dB	24.5 dB min	24.0 dB max
Power into any port		1 Watt Max		

Note: Supplier shall test each filter to the critical electrical specifications of the above table. Any subsequent audits may deviate from in value due to measurement repeatability among different test systems. Such deviations shall not exceed the following limits:


Specification Allowance	
Insertion Loss	0.1 dB
Return Loss	1.0 dB
Stopbands	1.0 dB

*This product is covered by one or more of the following U.S. and foreign patents including: US 4,692,726;US 4,742,562; US 4,800,348;US 4,829,274;US 5,146,193;EP 0573597;DE 0573597;FR 0573597;JP 508149/92;KR 142171;US 5,162,760;US 5,218,329;US 5,250,916;US 5,327,109;US 5,488,335;CA 2114029;FR 9306297;GB 2273393;JP 3205337;KR 115113;CN 93106228.4;US 5,512,866;EP 0706719;DE 0706719;FR 0706719;GB 0706719;CN 95190359.4;US 5,602,518;US 5,721,520;US 5,745,018;EP 0910875;DE 0910875;DK 0910875;FR 0910875;GB 0910875;IE 0910875;JP 505182/98;KR 10-323013;US 5,994,978;US 6,462,629;CN 00810420.4;US 6,559,735;US 6,650,202;US 6,834,429. Other US and foreign patents pending.

CTS Corporation 2006 reserves all copyrights in the layout, design and configuration of the patterns on this product.


Mechanical Drawing

Rev 1 – Origin Date: July 11, 2005 – Revision Date: September 21, 2007

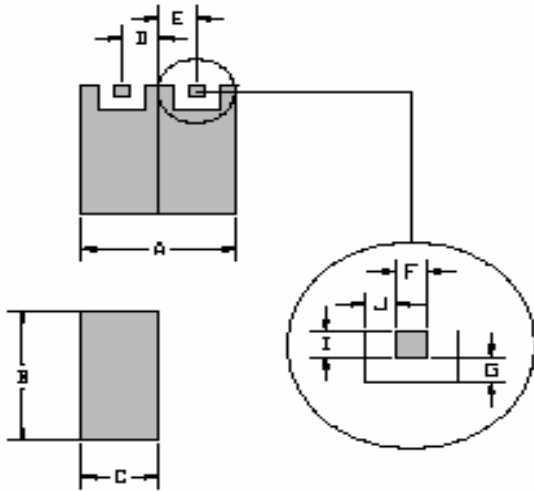


Dim	Nominal (mm)	Tolerance (mm) +/- or max
A	11.748	Max
B	7.29	Max
C	4.496	Max
D	3.302	0.13
E	3.302	0.13
F	1.27	0.13
G	0.762	0.13
H		
I	1.27	0.13
J	0.762	0.13

Electrical response


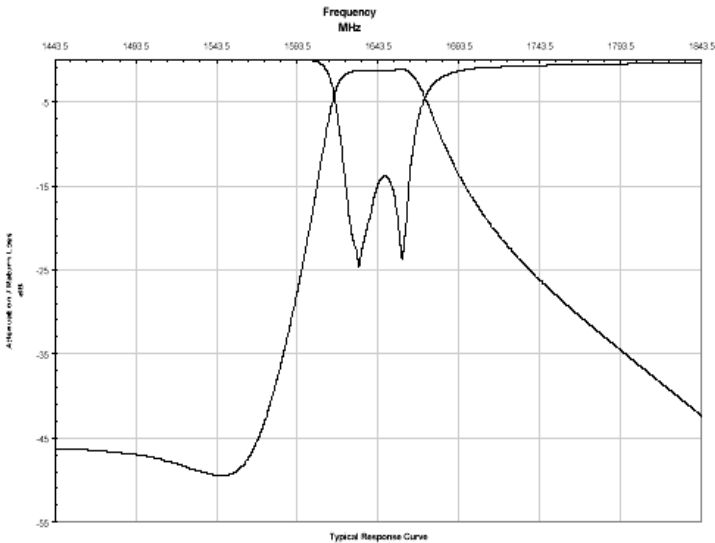


PCB Layout

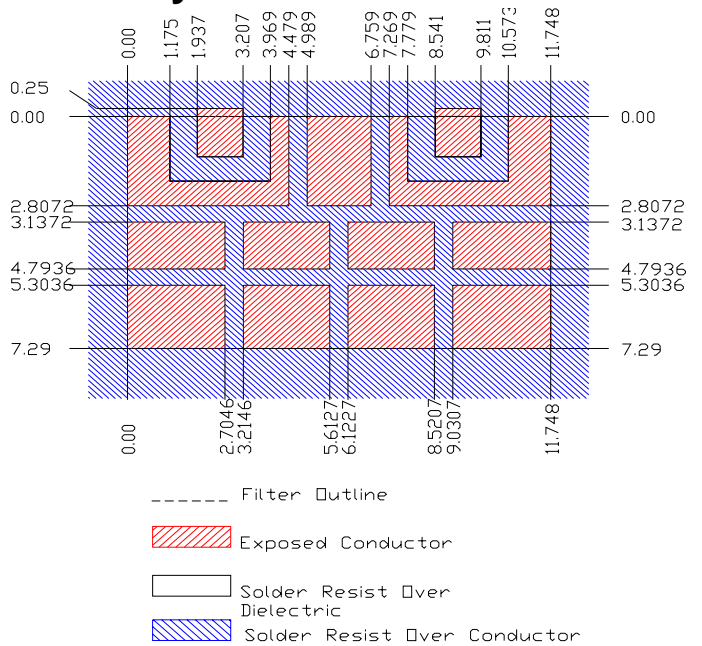

Packaging and Marking

DIMENSION	UNITS	SPECIFICATION
REEL DIAMETER	mm	330
REEL WEIGHT	kg	1.9
REEL QUANTITY	Per reel	800

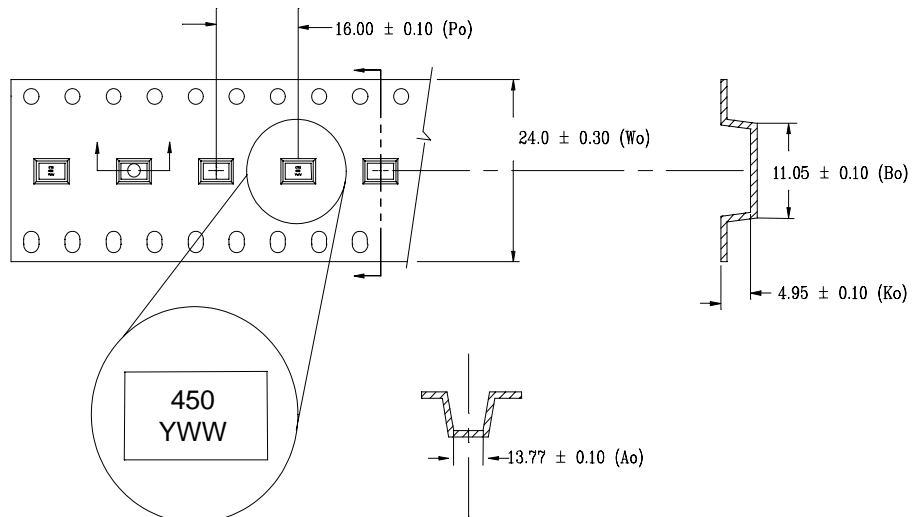

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View KFF6450A on WIN SOURCE](#)
- ⊖ [Tusonix a Subsidiary of CTS Electronic Components Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management