





**THE DATASHEET OF
PLP1-500-F**



REV.	Updated General Specifications
L	Updated General Specifications
M	Added Panel Thickness
N	Added .188" and .315"
P	Added Metric Lengths
R	Added Color Options

Part No.	X = Body Length
PLP1-100-F	0.100 (2.5mm)
PLP1-125-F	0.125 (3.2mm)
PLP1-188-F	0.188 (4.8mm)
PLP1-250-F	0.250 (6.4mm)
PLP1-313-F	0.313 (7.9mm)
PLP1-350-F	0.350 (8.9mm)
PLP1-375-F	0.375 (9.5mm)
PLP1-500-F	0.500 (12.7mm)
PLP1-625-F	0.625 (15.9mm)
PLP1-750-F	0.750 (19.0mm)
PLP1-830-F	0.830 (21.1mm)
PLP1-3MM-F	3mm (0.118")
PLP1-4MM-F	4mm (0.157")
PLP1-5MM-F	5mm (0.197")
PLP1-6MM-F	6mm (0.236")
PLP1-7MM-F	7mm (0.276")
PLP1-8MM-F	8mm (0.315")
PLP1-9MM-F	9mm (0.354")
PLP1-10MM-F	10mm (0.394")

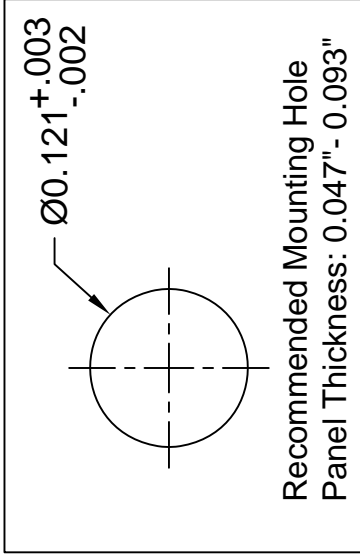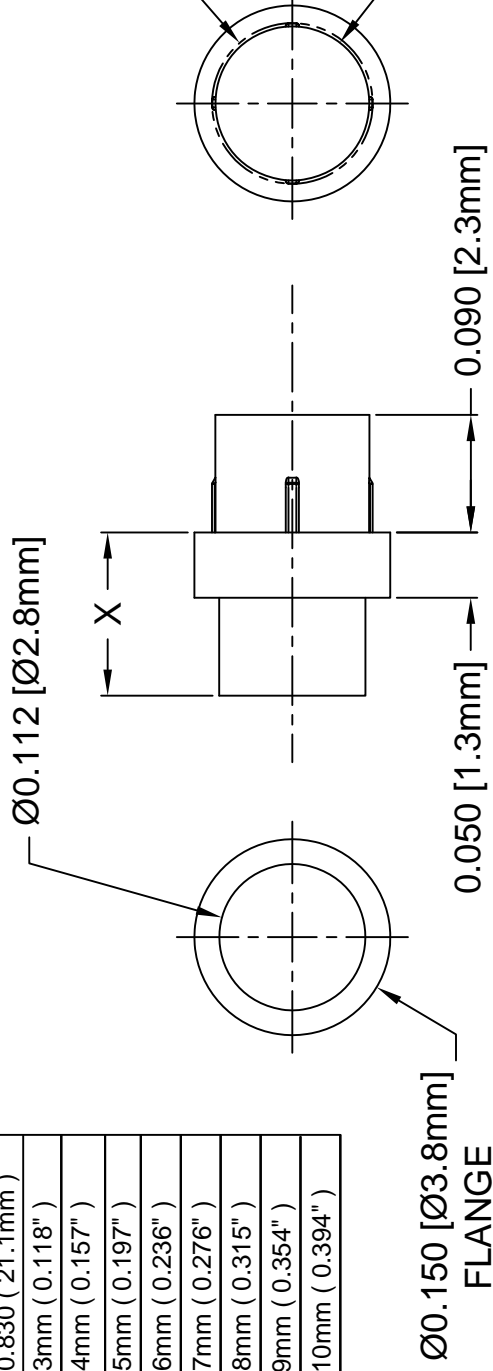

2. MATERIAL: POLYCARBONATE, 94V-0, CLEAR.
1. GENERAL SPECIFICATIONS: BIVAR MOLDED COMPONENT SPECIFICATION BV00-E101 and BSMC-1001.


STANDARD TOLERANCES (UNLESS OTHERWISE SPECIFIED)		DATE:
DECIMALS	ANGULAR	
.X	°	01/11
.XX		
.XXX		

DESIGNED: **Michael Chen**
CHECKED: **E. M. Muldoon**

DATE: **04/22**


OTHER AVAILABLE COLORS
 * SEE TABLE FOR ORDERING INFORMATION

REV.	SEE SHEET #1

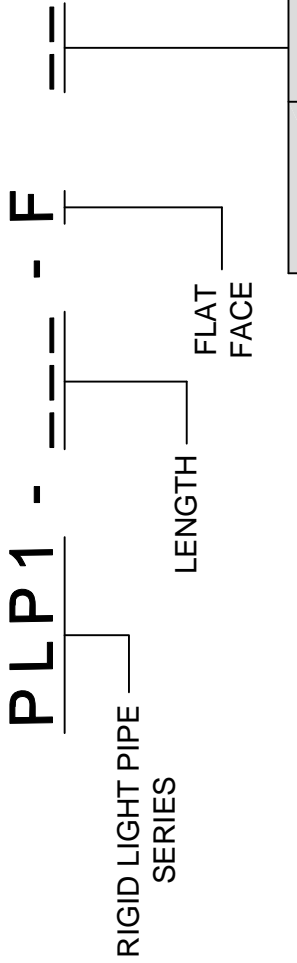

COLOR	Order Code
BLUE	BE
BLACK	BK
GREEN	GN
GRAY	GY
RED	RD
YELLOW	YW



NOTE: LEAVE ORDER CODE BLANK
 IF NO COLOR IS DESIRED.

STANDARD TOLERANCES (UNLESS OTHERWISE SPECIFIED) DECIMALS ANGLES	
	DESIGNED: K. Aukshunas DATE: 01/2
	CHECKED: J. Chiang DATE: 01/2

3. PARTS ARE DYED TO COLOR UPON REQUEST.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View PLP1-500-F on WIN SOURCE](#)
-  [Bivar Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management