




# Y5V Dielectric

## General Specifications

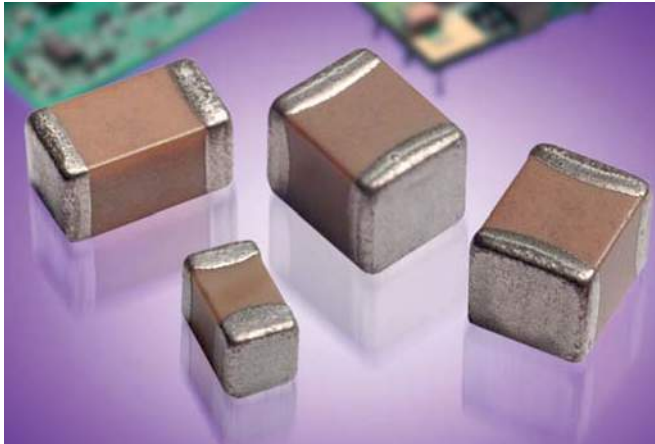

Y5V formulations are for general-purpose use in a limited temperature range. They have a wide temperature characteristic of +22% -82% capacitance change over the operating temperature range of -30°C to +85°C.

These characteristics make Y5V ideal for decoupling applications within limited temperature range.



### PART NUMBER (see page 2 for complete part number explanation)

**0805**

**Size**  
(L" x W")

**3**

**Voltage**  
6.3V = 6  
10V = Z  
16V = Y  
25V = 3  
50V = 5

**G**

**Dielectric**  
Y5V = G

**104**

**Capacitance Code (In pF)**  
2 Sig. Digits + Number of Zeros

**Z**

**Capacitance Tolerance**  
Z = +80 -20%

**A**

**Failure Rate**  
A = Not Applicable

**T**

**Terminations**  
T = Plated Ni and Sn


**2**

**Packaging**  
2 = 7" Reel  
4 = 13" Reel


**A**

**Special Code**  
A = Std. Product


**Temperature Coefficient**

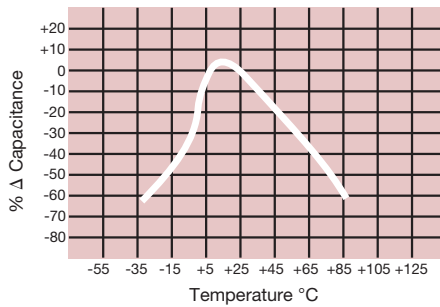


**Capacitance Change vs. DC Bias Voltage**

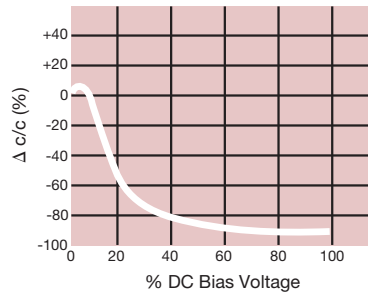


**Insulation Resistance vs. Temperature**

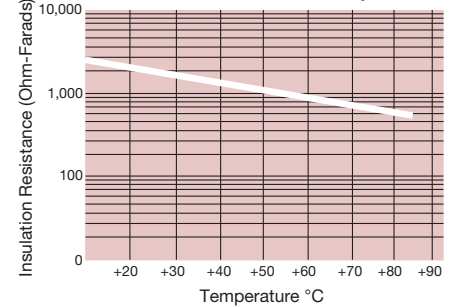


**0.1 μF - 0603 Impedance vs. Frequency**

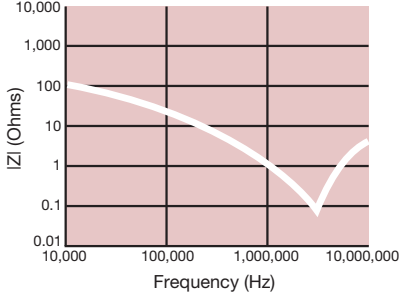

**0.22 μF - 0805 Impedance vs. Frequency**

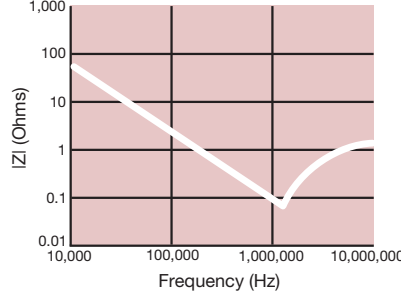


**1 μF - 1206 Impedance vs. Frequency**

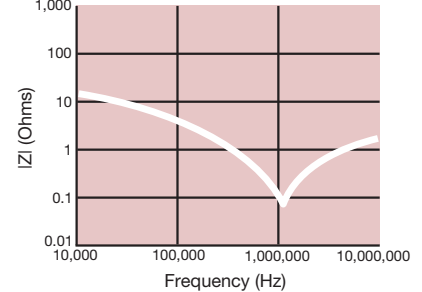

# Y5V Dielectric

## Specifications and Test Methods




| Parameter/Test                        |                       | Y5V Specification Limits  | Measuring Conditions   |   |
|---------------------------------------|-----------------------|---|--|---|
| <b>Operating Temperature Range</b>    |                       | -30°C to +85°C  | Temperature Cycle Chamber  |   |
| <b>Capacitance</b>                    |                       | Within specified tolerance  | Freq.: 1.0 kHz ± 10%<br>Voltage: 1.0Vrms ± .2V<br>For Cap > 10 µF, 0.5Vrms @ 120Hz   |   |
| <b>Dissipation Factor</b>             |                       | ≤ 5.0% for ≥ 50V DC rating<br>≤ 7.0% for 25V DC rating<br>≤ 9.0% for 16V DC rating<br>≤ 12.5% for ≤ 10V DC rating |  |   |
| <b>Insulation Resistance</b>          |                       | 10,000MΩ or 500MΩ - µF, whichever is less   | Charge device with rated voltage for 120 ± 5 secs @ room temp/humidity   |   |
| <b>Dielectric Strength</b>            |                       | No breakdown or visual defects  | Charge device with 250% of rated voltage for 1-5 seconds, w/charge and discharge current limited to 50 mA (max)                            |   |
| <b>Resistance to Flexure Stresses</b> | Appearance            | No defects  | Deflection: 2mm<br>Test Time: 30 seconds<br>1mm/sec<br> |   |
|                                       | Capacitance Variation | ≤ ±30%  |  |   |
|                                       | Dissipation Factor    | Meets Initial Values (As Above)   |  |   |
|                                       | Insulation Resistance | ≥ Initial Value x 0.1   |  |   |
| <b>Solderability</b>                  |                       | ≥ 95% of each terminal should be covered with fresh solder  | Dip device in eutectic solder at 230 ± 5°C for 5.0 ± 0.5 seconds   |   |
| <b>Resistance to Solder Heat</b>      | Appearance            | No defects, <25% leaching of either end terminal  | Dip device in eutectic solder at 260°C for 60 seconds. Store at room temperature for 24 ± 2 hours before measuring electrical properties.  |   |
|                                       | Capacitance Variation | ≤ ±20%  |  |   |
|                                       | Dissipation Factor    | Meets Initial Values (As Above)   |  |   |
|                                       | Insulation Resistance | Meets Initial Values (As Above)   |  |   |
|                                       | Dielectric Strength   | Meets Initial Values (As Above)   |  |   |
| <b>Thermal Shock</b>                  | Appearance            | No visual defects   | Step 1: -30°C ± 2°   | 30 ± 3 minutes  |
|                                       | Capacitance Variation | ≤ ±20%  | Step 2: Room Temp  | ≤ 3 minutes   |
|                                       | Dissipation Factor    | Meets Initial Values (As Above)   | Step 3: +85°C ± 2°   | 30 ± 3 minutes  |
|                                       | Insulation Resistance | Meets Initial Values (As Above)   | Step 4: Room Temp  | ≤ 3 minutes   |
|                                       | Dielectric Strength   | Meets Initial Values (As Above)   | Repeat for 5 cycles and measure after 24 ± 2 hours at room temperature   |   |
|                                       | <b>Load Life</b>      |   | Meets Initial Values (As Above)  | Charge device with twice rated voltage in test chamber set at 85°C ± 2°C for 1000 hours (+48, -0) |
| <b>Load Humidity</b>                  | Appearance            | No visual defects   | Remove from test chamber and stabilize at room temperature for 24 ± 2 hours before measuring.  |   |
|                                       | Capacitance Variation | ≤ ±30%  |  |   |
|                                       | Dissipation Factor    | ≤ Initial Value x 1.5 (See Above)   |  |   |
|                                       | Insulation Resistance | ≥ Initial Value x 0.1 (See Above)   |  |   |
|                                       | Dielectric Strength   | Meets Initial Values (As Above)   |  |   |
| <b>Load Humidity</b>                  |                       | Meets Initial Values (As Above)   | Store in a test chamber set at 85°C ± 2°C/ 85% ± 5% relative humidity for 1000 hours (+48, -0) with rated voltage applied.                 |   |
| <b>Load Humidity</b>                  |                       | Meets Initial Values (As Above)   | Remove from chamber and stabilize at room temperature and humidity for 24 ± 2 hours before measuring.                                      |   |

# Y5V Dielectric Capacitance Range



## PREFERRED SIZES ARE SHADED

| Size         | 0201        |                 | 0402            |             |             |             | 0603            |             |             |             | 0805            |             |             |             | 1206            |  |  |  | 1210            |  |  |  |
|--------------|-------------|-----------------|-----------------|-------------|-------------|-------------|-----------------|-------------|-------------|-------------|-----------------|-------------|-------------|-------------|-----------------|--|--|--|-----------------|--|--|--|
| Soldering    | Reflow Only |                 | Reflow/Wave     |             |             |             | Reflow/Wave     |             |             |             | Reflow/Wave     |             |             |             | Reflow/Wave     |  |  |  |                 |  |  |  |
| Packaging    | All Paper   |                 | All Paper       |             |             |             | All Paper       |             |             |             | Paper/Embossed  |             |             |             | Paper/Embossed  |  |  |  | Paper/Embossed  |  |  |  |
| (L) Length   | mm          | 0.60 ± 0.09     | 1.00 ± 0.10     |             |             |             | 1.60 ± 0.15     |             |             |             | 2.01 ± 0.20     |             |             |             | 3.20 ± 0.20     |  |  |  | 3.20 ± 0.20     |  |  |  |
|              | (in.)       | (0.024 ± 0.004) | (0.040 ± 0.004) |             |             |             | (0.063 ± 0.006) |             |             |             | (0.079 ± 0.008) |             |             |             | (0.126 ± 0.008) |  |  |  | (0.126 ± 0.008) |  |  |  |
| (W) Width    | mm          | 0.30 ± 0.09     | 0.50 ± 0.10     |             |             |             | .81 ± 0.15      |             |             |             | 1.25 ± 0.20     |             |             |             | 1.60 ± 0.20     |  |  |  | 2.50 ± 0.20     |  |  |  |
|              | (in.)       | (0.011 ± 0.004) | (0.020 ± 0.004) |             |             |             | (0.032 ± 0.006) |             |             |             | (0.049 ± 0.008) |             |             |             | (0.063 ± 0.008) |  |  |  | (0.098 ± 0.008) |  |  |  |
| (t) Terminal | mm          | 0.15 ± 0.05     | 0.25 ± 0.15     |             |             |             | 0.35 ± 0.15     |             |             |             | 0.50 ± 0.25     |             |             |             | 0.50 ± 0.25     |  |  |  | .50 ± 0.25      |  |  |  |
|              | (in.)       | (0.006 ± 0.002) | (0.010 ± 0.006) |             |             |             | (0.014 ± 0.006) |             |             |             | (0.020 ± 0.010) |             |             |             | (0.020 ± 0.010) |  |  |  | (0.020 ± 0.010) |  |  |  |
| WVDC         |             | 6.3 10          | 6 10 16 25 50   | 10 16 25 50 | 10 16 25 50 | 10 16 25 50 | 10 16 25 50     | 10 16 25 50 | 10 16 25 50 | 10 16 25 50 | 10 16 25 50     | 10 16 25 50 | 10 16 25 50 | 10 16 25 50 | 10 16 25 50     |  |  |  |                 |  |  |  |
| Cap (pF)     | 820         |                 |                 |             |             |             |                 |             |             |             |                 |             |             |             |                 |  |  |  |                 |  |  |  |
|              | 1000        |                 |                 |             |             |             |                 |             |             |             |                 |             |             |             |                 |  |  |  |                 |  |  |  |
|              | 2200        |                 |                 |             |             |             |                 |             |             |             |                 |             |             |             |                 |  |  |  |                 |  |  |  |
| Cap (μF)     | 4700        |                 |                 |             |             |             |                 |             |             |             |                 |             |             |             |                 |  |  |  |                 |  |  |  |
|              | 0.010       |                 |                 |             |             |             |                 |             |             |             |                 |             |             |             |                 |  |  |  |                 |  |  |  |
|              | 0.022       |                 |                 |             |             |             |                 |             |             |             |                 |             |             |             |                 |  |  |  |                 |  |  |  |
|              | 0.047       |                 |                 |             |             |             |                 |             |             |             |                 |             |             |             |                 |  |  |  |                 |  |  |  |
|              | 0.10        |                 |                 |             |             |             |                 |             |             |             |                 |             |             |             |                 |  |  |  |                 |  |  |  |
|              | 0.22        |                 |                 |             |             |             |                 |             |             |             |                 |             |             |             |                 |  |  |  |                 |  |  |  |
|              | 0.33        |                 |                 |             |             |             |                 |             |             |             |                 |             |             |             |                 |  |  |  |                 |  |  |  |
|              | 0.47        |                 |                 |             |             |             |                 |             |             |             |                 |             |             |             |                 |  |  |  |                 |  |  |  |
|              | 1.0         |                 |                 |             |             |             |                 |             |             |             |                 |             |             |             |                 |  |  |  |                 |  |  |  |
|              | 2.2         |                 |                 |             |             |             |                 |             |             |             |                 |             |             |             |                 |  |  |  |                 |  |  |  |
|              | 4.7         |                 |                 |             |             |             |                 |             |             |             |                 |             |             |             |                 |  |  |  |                 |  |  |  |
|              | 10.0        |                 |                 |             |             |             |                 |             |             |             |                 |             |             |             |                 |  |  |  |                 |  |  |  |
|              | 22.0        |                 |                 |             |             |             |                 |             |             |             |                 |             |             |             |                 |  |  |  |                 |  |  |  |
|              | 47.0        |                 |                 |             |             |             |                 |             |             |             |                 |             |             |             |                 |  |  |  |                 |  |  |  |
| WVDC         |             | 6.3 10          | 6 10 16 25 50   | 10 16 25 50 | 10 16 25 50 | 10 16 25 50 | 10 16 25 50     | 10 16 25 50 | 10 16 25 50 | 10 16 25 50 | 10 16 25 50     | 10 16 25 50 | 10 16 25 50 | 10 16 25 50 |                 |  |  |  |                 |  |  |  |
| Size         |             | 0201            | 0402            | 0603        | 0805        | 1206        | 1210            |             |             |             |                 |             |             |             |                 |  |  |  |                 |  |  |  |



| Letter         | A               | C               | E               | G               | J               | K               | M               | N               | P               | Q               | X               | Y               | Z               |
|----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Max. Thickness | 0.33<br>(0.013) | 0.56<br>(0.022) | 0.71<br>(0.028) | 0.90<br>(0.035) | 0.94<br>(0.037) | 1.02<br>(0.040) | 1.27<br>(0.050) | 1.40<br>(0.055) | 1.52<br>(0.060) | 1.78<br>(0.070) | 2.29<br>(0.090) | 2.54<br>(0.100) | 2.79<br>(0.110) |
|                | PAPER           |                 |                 |                 |                 | EMBOSSSED       |                 |                 |                 |                 |                 |                 |                 |

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 0805YG105ZAT2A on WIN SOURCE](#)

 [AVX Corporation](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management