



**THE DATASHEET OF
DCMX391T450AB2B**



Cornell Dubilier

Cornell Dubilier Marketing, Inc
Liberty, South Carolina
TEL: 864-843-2277 FAX:864-843-3800

Engineering

Catalog Number: DCMX391T450AB2B

Customer Part Number: _____

Date: 1/20/2023

Capacitance: 390 μ F

Tolerance: - 10% + 50%

Working Volts: 450 VDC

Surge Volts: 500 VDC

Leakage Current @ 25°C: 2513 μ A

ESR @ 120 Hz @ 25°C: 0.333 Ω max.

Ripple Current @ 120 Hz, 85°C: 1.67A

Diameter (D): 1.375 \pm 0.031 inches

Length (L): 3.125 \pm 0.062 inches


Total Length, W/Insulation (TL): 3.376 \pm 0.062 inches

Terminal Spacing (S): 0.500 \pm 0.015 inches

Terminal Thread (T): 10-32 UNF

Insulation: PVC

Operating Temperature: - 40°C ~ +85°C

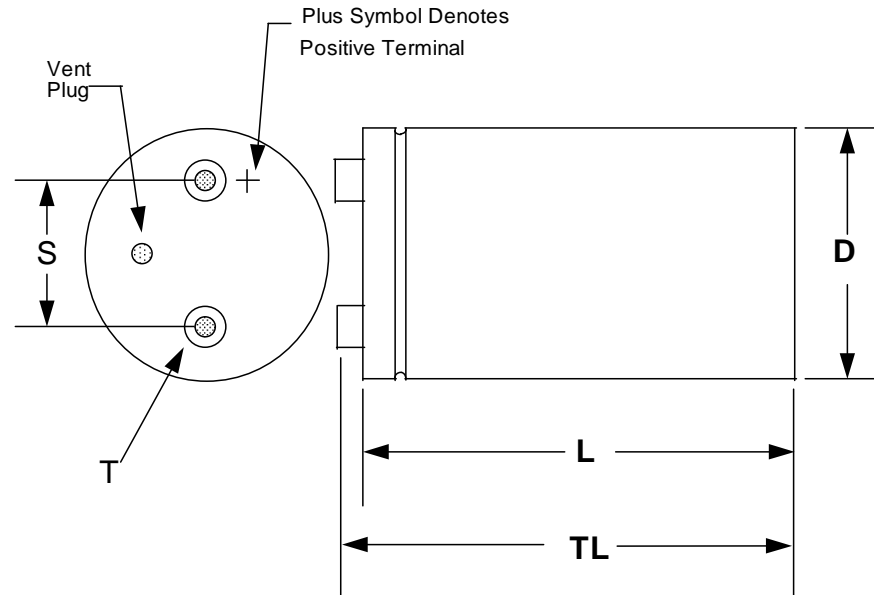



ROHS Compliant for all date codes after "0513",
Per provisions of CD document 10-28.

"Controlled Copy" if viewed on CD Server or if copy is stamped
in Red, Otherwise considered as an "Uncontrolled Copy"

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View DCMX391T450AB2B on WIN SOURCE](#)
-  [Cornell Dubilier Electronics \(CDE\) Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management