




**THE DATASHEET OF
FLLD4008ATHT3**



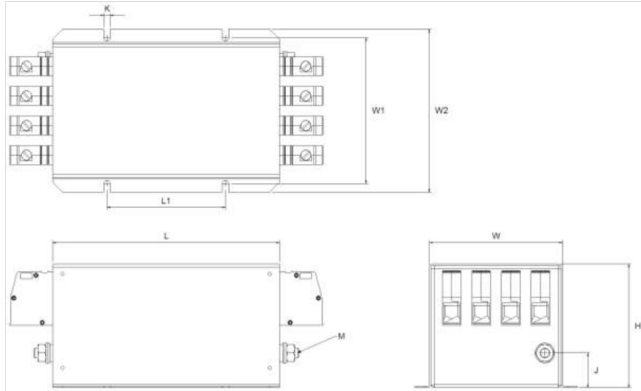

Click [here](#) for the 3D model.

Dimensions	
L	120mm NOM
W	115mm NOM
H	80mm NOM
L1	80mm NOM
W1	127.5mm NOM
W2	143mm NOM
J	32mm NOM
K	6.5mm NOM
M (Earth)	Threaded Studs M6

Packaging Specifications	
Packaging	Bulk
Packaging Quantity	1
Typical Component Weight	800 g

General Information	
Series	FLLD4-TH
Style	Chassis Mount
Description	EMI Filter, Chassis Mount, Compact
Features	High Performance
Phase	Three-phase + Neutral
RoHS	Yes
Qualifications	IEC/EN 60939
Terminal Type	Terminal Block

Specifications	
Voltage AC	530 VAC
Rated Frequency	50-60 Hz
Rated Current	8 A (50°C)
Rated Temperature	50°C
Temperature Range	-25/+100°C
Climate Category	25/100/21
Test Voltage DC (P to P)	2250 VDC
Test Voltage DC (P to E)	3000 VDC
Power Loss	3 W (25°C 50 Hz)
Leakage Current	11 mA

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View FLLD4008ATHT3 on WIN SOURCE](#)

 [Kemet Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management