



**THE DATASHEET OF  
FP56-200**



### FP56-200

#### Electrical Specifications (@25C)

1. Maximum Power: 12.0 VA
2. Primary Voltage:
  - Series: 230V@50/60 Hz
  - Parallel: 115V@50/60Hz
3. Secondary:
  - Series: 56.0VCT @ 0.200Amps
  - Parallel: 28.0V @ 0.400Amps

#### Description:

The FP56-200 is part of a series which has a long history of reliable service in the field, made from a proven design and constructed with UL recognized materials.

#### Construction:

Wound on two dual channel nylon bobbin. Materials are UL recognized, Class B (130° C) rated.

#### Safety:

These products are 100% tested for dielectric strength at 2KVAC, 60Hz between primary and secondary windings and between the primary / secondary windings and the core.

#### Agency File:

UL: File E53148, UL 506, Class B General Purpose Transformer,  
cUL: File E53148, UL 506, Class B General Purpose Transformer, Canadian Use




#### Dimensions:

A	B	C	D	E	F
2.500	2.00	1.062	0.267	0.500	2.00

Units: In inches

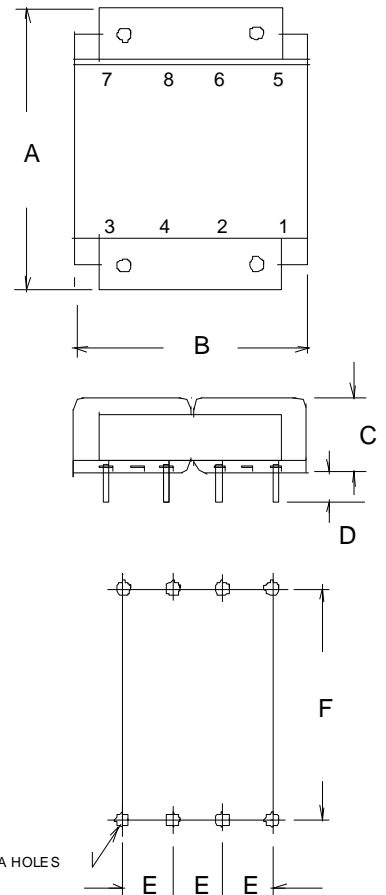
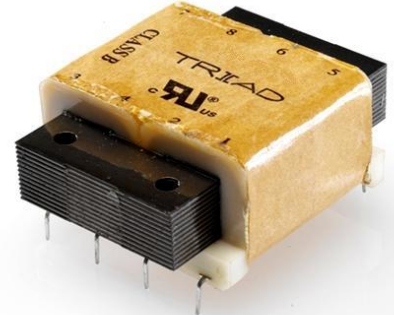
Weight: 11.0 oz  
Pin Dimension: .020 x .041 in

#### Schematic:





**RoHS Compliance:** As of manufacturing date February 2016, all standard products meet the requirements of 2015/863/EU, known as the RoHS 3 initiative.

\*Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics website for the most current version. For soldering and washing information please see <http://www.triadmagnetics.com/faq.html>



## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View FP56-200 on WIN SOURCE](#)
-  [Triad Magnetics Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management