





**THE DATASHEET OF
GKG20086-05**



REV	DESCRIPTION	DATE	APP
00	NEW DRAWING	03/07/18	I.D.

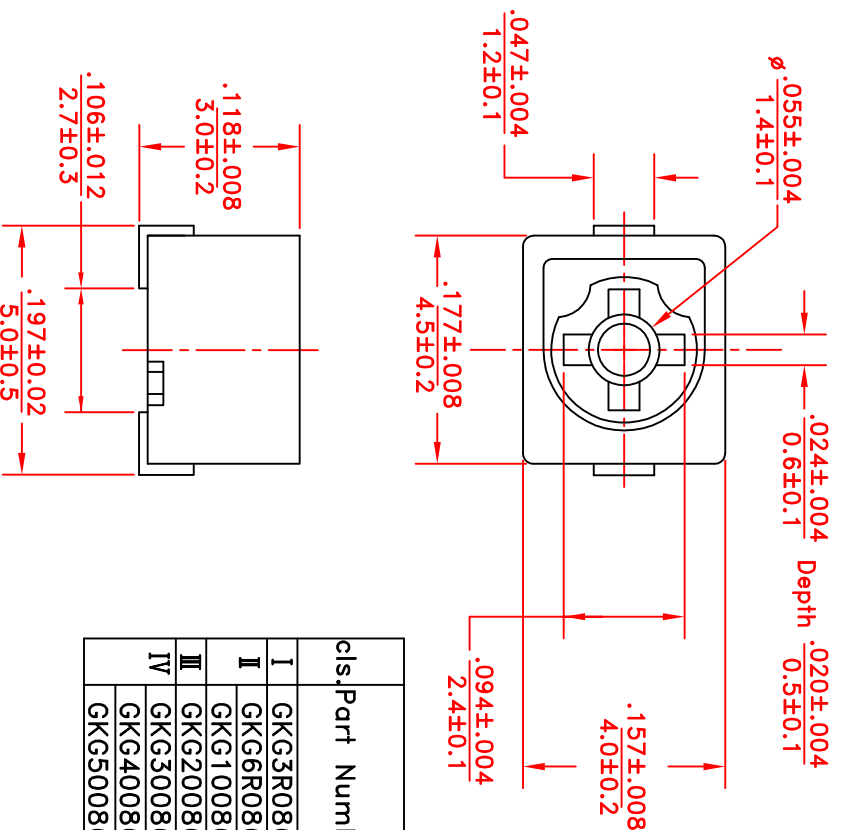

cls. Part Number	Capacitance (pF)		Q (at 1MHz voltage (min.))	Rated Temperature Coefficient (V.D.C.)	Temperature Characteristics	Drift (pF max.)	Case color
	Min. (+0%)	Max. (-50/+0%)					
I	GKG3R086	1.4	3.0	100	NP0±200(0±200)	±0.1	Brown
II	GKG6R086	2.0	6.0	100	NP0±200(0±200)	±0.1	Blue
	GKG10086	3.0	10.0	100	NP0±300(0±300)	±0.15	White
III	GKG20086	4.5	20.0	100	N750±400(-750±400)	±0.3	Red
IV	GKG30086	6.5	30.0	100	N1200±500(-1200±500)	±0.3	Green
	GKG40086	8.5	40.0	100	N1200±500(-1200±500)	±0.5	Yellow
	GKG50086	1.4	*50.0	300	N750±300(-750±300)	±0.7	Black

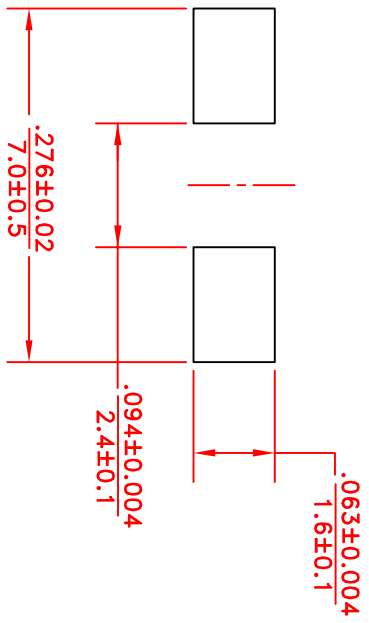

STANDARD LAND PATTERN

- SPECIFICATIONS:**
1. Operating temperature range: -25°C to + 85°C
 2. Insulation resistance: 10⁴ megohms min
 3. Dielectric withstanding voltage: Rated voltage x 2.2
 4. Torque: 0.2 to 1.39 oz-in (15 to 100 g-cm)
 5. Stable characteristics over a wide frequency range
 6. Dielectric: PTFE
 7. Designed to withstand flux baths and solder baths (with cover film type)
 8. All dimensions in/mm.

TOLERANCES: (EXCEPT AS NOTED)		SPRAGUE GOODMAN ELECTRONICS INC. 1700 SHAMES DRIVE WESTBURY, NY 11590	
DECIMAL: ±0.02 in ±0.5mm	MATERIAL:	SCALE: 8:1	DRAWN BY: R. LEVIN
FRACTIONAL: 1/64	TITLE: GKGXXX86	APPROVED: I. DITLYA	USED FOR:
ANGULAR: 1°	DATE: 03/07/2018	DRAWING NUMBER: GKGXXX86	REV: 00

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View GKG20086-05 on WIN SOURCE](#)

 [Sprague-Goodman Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management