




# THE DATASHEET OF CD4504BE



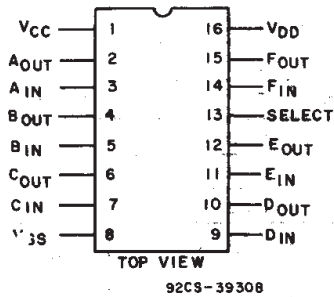

**TERMINAL ASSIGNMENT**

## CMOS Hex Voltage-Level Shifter for TTL-to-CMOS or CMOS-to-CMOS Operation

High-Voltage Types (20-Volt Rating)

**Features:**

- Independence of power-supply sequence considerations— $V_{CC}$  can exceed  $V_{DD}$ ; input signals can exceed both  $V_{CC}$  and  $V_{DD}$
- Up and down level-shifting capability
- Shiftable input threshold for either CMOS or TTL compatibility
- Standardized symmetrical output characteristics
- 100% tested for quiescent current @ 20 V
- Maximum input current of 1  $\mu$ A at 18 V over full package-temperature range; 100 nA at 18 V and 25°C
- 5 V, 10 V, and 15 V parametric ratings
- Meets all requirements of JEDEC Standard No. 13B, "Standard Specifications for Description of 'B' Series CMOS Devices"

■ CD4504B hex voltage level-shifter consists of six circuits which shift input signals from the  $V_{CC}$  logic level to the  $V_{DD}$  logic level. To shift TTL signals to CMOS logic levels, the SELECT input is at the  $V_{CC}$  HIGH logic state. When the SELECT input is at a LOW logic state, each circuit translates signals from one CMOS level to another.

The CD4504B types are supplied in 16-lead hermetic dual-in-line ceramic packages (F3A suffix), 16-lead dual-in-line plastic packages (E suffix), 16-lead small-outline packages (M, M96, and MT suffixes), and 16-lead thin shrink small-outline packages (PW and PWR suffixes).

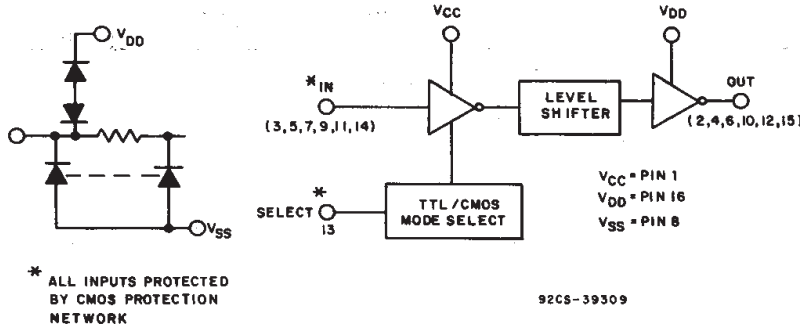


Fig. 1 - Functional diagram for CD4504B.

**MAXIMUM RATINGS, Absolute-Maximum Values:**

|  |  |
|--|--|
| <b>DC SUPPLY-VOLTAGE RANGE, (<math>V_{DD}</math>)</b>                      |  |
| Voltages referenced to $V_{SS}$ Terminal                                   | -0.5V to +20V                                      |
| <b>INPUT VOLTAGE RANGE, ALL INPUTS</b>                                     |  |
|  | -0.5V to $V_{CC} + 0.5V$                           |
| <b>DC INPUT CURRENT, ANY ONE INPUT</b>                                     |  |
|  | $\pm 10$ mA  |
| <b>POWER DISSIPATION PER PACKAGE (<math>P_D</math>):</b>                   |  |
| For $T_A = -55^\circ\text{C}$ to $+100^\circ\text{C}$                      | 500mW  |
| For $T_A = +100^\circ\text{C}$ to $+125^\circ\text{C}$ :                   | Derate Linearly at 12mW/ $^\circ\text{C}$ to 200mW |
| <b>DEVICE DISSIPATION PER OUTPUT TRANSISTOR -</b>                          |  |
| FOR $T_A = \text{FULL PACKAGE-TEMPERATURE RANGE (All Package Types)}$      | 100mW  |
| <b>OPERATING-TEMPERATURE RANGE (<math>T_A</math>)</b>                      |  |
|  | $-55^\circ\text{C}$ to $+125^\circ\text{C}$        |
| <b>STORAGE TEMPERATURE RANGE (<math>T_{stg}</math>)</b>                    |  |
|  | $-85^\circ\text{C}$ to $+150^\circ\text{C}$        |
| <b>LEAD TEMPERATURE (DURING SOLDERING):</b>                                |  |
| At distance 1/16 $\pm$ 1/32 inch (1.59 $\pm$ 0.79mm) from case for 10s max | +265°C   |

3  
COMMERCIAL CMOS  
HIGH VOLTAGE ICs

# CD4504B Types

V<sub>GEN</sub>

## STATIC ELECTRICAL CHARACTERISTICS

| CHARACTERISTIC  | CONDITIONS            |                        |                        |                        | LIMITS AT INDICATED TEMPERATURES (°C) |       |       |       |       |                   |      | UNITS |   |
|---|-----------------------|------------------------|------------------------|------------------------|---------------------------------------|-------|-------|-------|-------|-------------------|------|-------|---|
|   | V <sub>O</sub><br>(V) | V <sub>IN</sub><br>(V) | V <sub>CC</sub><br>(V) | V <sub>DD</sub><br>(V) | -55                                   | -40   | +85   | +125  | +25   |                   |      |       |   |
|   |                       |                        |                        |                        |                                       |       |       |       | MIN   | TYP               | MAX  |       |   |
| Quiescent Device Current, I <sub>DD</sub> Max and I <sub>CC</sub> in CMOS-CMOS Mode | —                     | 0,5                    | 5                      | 5                      | 1.5                                   | 1.5   | 1.5   | 1.5   | —     | 0.02              | 1.5  | mA    |   |
|   | —                     | 0,10                   | 5                      | 10                     | 2                                     | 2     | 2     | 2     | —     | 0.02              | 2    |       |   |
|   | —                     | 0,15                   | 5                      | 15                     | 4                                     | 4     | 120   | 120   | —     | 0.02              | 4    | μA    |   |
|   | —                     | 0,20                   | 5                      | 20                     | 20                                    | 20    | 600   | 600   | —     | 0.04              | 20   |       |   |
| Quiescent Device Current, I <sub>CC</sub> Max TTL-CMOS Mode                         | —                     | 0,5                    | 5                      | 5                      | 5                                     | 5     | 6     | 6     | —     | 2.5               | 5    | mA    |   |
|   | —                     | 0,10                   | 5                      | 10                     | 5                                     | 5     | 6     | 6     | —     | 2.5               | 5    |       |   |
|   | —                     | 0,15                   | 5                      | 15                     | 5                                     | 5     | 6     | 6     | —     | 2.5               | 5    |       |   |
| Output Low (Sink) Current, I <sub>OL</sub> Min                                      | 0.4                   | 0.5                    | —                      | 5                      | 0.64                                  | 0.61  | 0.42  | 0.36  | 0.51  | 1                 | —    | mA    |   |
|   | 0.5                   | 0,10                   | —                      | 10                     | 1.6                                   | 1.5   | 1.1   | 0.9   | 1.3   | 2.6               | —    |       |   |
|   | 1.5                   | 0,15                   | —                      | 15                     | 4.2                                   | 4     | 2.8   | 2.4   | 3.4   | 6.8               | —    |       |   |
| Output High (Source) Current, I <sub>OH</sub> Min                                   | 4.6                   | 0,5                    | —                      | 5                      | -0.64                                 | -0.61 | -0.42 | -0.36 | -0.51 | -1                | —    | mA    |   |
|   | 2.5                   | 0,5                    | —                      | 5                      | -2                                    | -1.8  | -1.3  | -1.15 | -1.6  | -3.2              | —    |       |   |
|   | 9.5                   | 0,10                   | —                      | 10                     | -1.6                                  | -1.5  | -1.1  | -0.9  | -1.3  | -2.6              | —    |       |   |
|   | 13.5                  | 0,15                   | —                      | 15                     | -4.2                                  | -4    | -2.8  | -2.4  | -3.4  | -6.8              | —    |       |   |
| Output Voltage: Low-Level, V <sub>OL</sub> Max                                      | —                     | 0,5                    | —                      | 5                      | 0.05                                  |       |       |       | —     | 0                 | 0.05 | V     |   |
|   | —                     | 0,10                   | —                      | 10                     | 0.05                                  |       |       |       | —     | 0                 | 0.05 |       |   |
|   | —                     | 0,15                   | —                      | 15                     | 0.05                                  |       |       |       | —     | 0                 | 0.05 |       |   |
| Output Voltage: High-Level, V <sub>OH</sub> Min                                     | —                     | 0,5                    | —                      | 5                      | 4.95                                  |       |       |       | 4.95  | 5                 | —    | V     |   |
|   | —                     | 0,10                   | —                      | 10                     | 9.95                                  |       |       |       | 9.95  | 10                | —    |       |   |
|   | —                     | 0,15                   | —                      | 15                     | 14.95                                 |       |       |       | 14.95 | 15                | —    |       |   |
| Input Low Voltage, V <sub>IL</sub> Max Note 1                                       | TTL-CMOS              | 1                      | —                      | 5                      | 10                                    | 0.8   |       |       |       | —                 | —    | 0.8   | V |
|   | TTL-CMOS              | 1                      | —                      | 5                      | 15                                    | 0.8   |       |       |       | —                 | —    | 0.8   |   |
|   | CMOS-CMOS             | 1                      | —                      | 5                      | 10                                    | 1.5   |       |       |       | —                 | —    | 1.5   |   |
|   | CMOS-CMOS             | 1.5                    | —                      | 5                      | 15                                    | 1.5   |       |       |       | —                 | —    | 1.5   |   |
|   | CMOS-CMOS             | 1.5                    | —                      | 10                     | 15                                    | 3     |       |       |       | —                 | —    | 3     |   |
| Input High Voltage, V <sub>IH</sub> Min Note 1                                      | TTL-CMOS              | 9                      | —                      | 5                      | 10                                    | 2     |       |       |       | 2                 | —    | —     | V |
|   | TTL-CMOS              | 13.5                   | —                      | 5                      | 15                                    | 2     |       |       |       | 2                 | —    | —     |   |
|   | CMOS-CMOS             | 9                      | —                      | 5                      | 10                                    | 3.5   |       |       |       | 3.5               | —    | —     |   |
|   | CMOS-CMOS             | 13.5                   | —                      | 5                      | 15                                    | 3.5   |       |       |       | 3.5               | —    | —     |   |
|   | CMOS-CMOS             | 13.5                   | —                      | 10                     | 15                                    | 7     |       |       |       | 7                 | —    | —     |   |
| Input Current, I <sub>IN</sub> Max  | —                     | 0,18                   | —                      | 18                     | ±0.1                                  | ±0.1  | ±1    | ±1    | —     | ±10 <sup>-5</sup> | ±0.1 | μA    |   |

Note 1: Applies to the 6 input signals. For mode control (P13), only the CMOS-CMOS ratings apply.

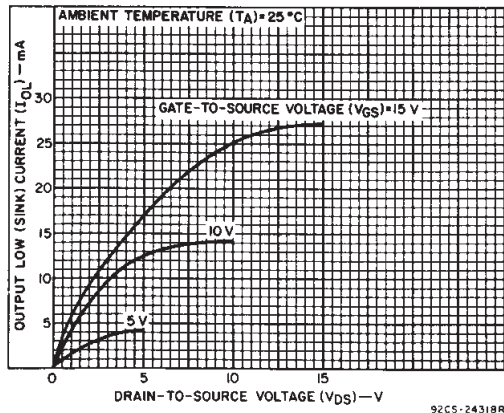


Fig. 2 - Typical output low (sink) current characteristics.


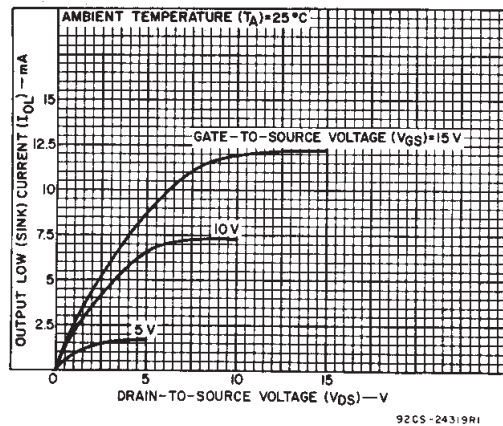



Fig. 3 - Minimum output low (sink) current characteristics.

# CD4504B Types

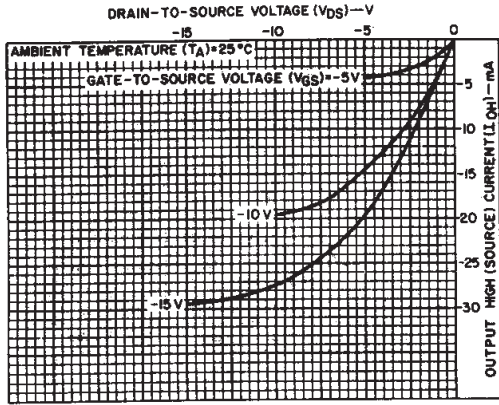

92CS-24320R3

Fig. 4 - Typical output high (source) current characteristics.

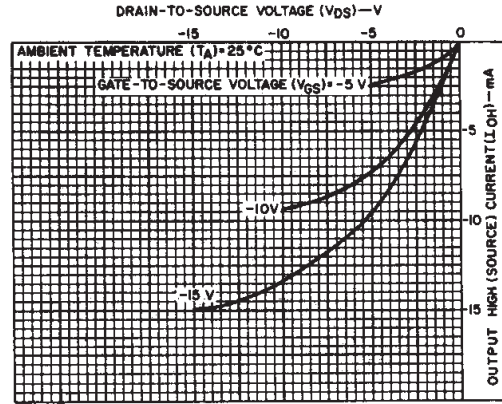

92CS-24321R2

Fig. 5 - Minimum output high (source) current characteristics.


## RECOMMENDED OPERATING CONDITIONS

For maximum reliability, nominal operating conditions should be selected so that operation is always within the following ranges:

| CHARACTERISTIC   | V <sub>DD</sub> (V) | LIMITS |      | UNITS |
|--|---------------------|--------|------|-------|
|  |                     | Min.   | Max. |       |
| Supply-Voltage Range (For T <sub>A</sub> = Full Package-Temperature Range) | —                   | 5      | 18   | V     |


## DYNAMIC ELECTRICAL CHARACTERISTICS, At T<sub>A</sub> = 25°C; Input t<sub>r</sub>, t<sub>f</sub> = 20 ns, C<sub>L</sub> = 50 pF, R<sub>L</sub> = 200 Ω

| CHARACTERISTIC  | SHIFTING MODE                                     | V <sub>CC</sub> (V) | V <sub>DD</sub> (V) | LIMITS |      | UNITS |
|---|---|---------------------|---------------------|--------|------|-------|
|   |   |                     |                     | TYP.   | MAX. |       |
| Propagation Delay:<br>High-to-Low,<br>t <sub>PHL</sub>  | TTL to CMOS<br>V <sub>DD</sub> > V <sub>CC</sub>  | 5                   | 10                  | 140    | 280  | ns    |
|   | CMOS to CMOS<br>V <sub>DD</sub> > V <sub>CC</sub> | 5                   | 15                  | 140    | 280  |       |
|   | CMOS to CMOS<br>V <sub>CC</sub> > V <sub>DD</sub> | 5                   | 10                  | 120    | 240  |       |
|   |   | 5                   | 15                  | 120    | 240  |       |
|   |   | 10                  | 15                  | 70     | 140  |       |
|   |   | 10                  | 5                   | 275    | 550  |       |
|   |   | 15                  | 5                   | 275    | 550  |       |
|   |   | 15                  | 10                  | 70     | 140  |       |
| Low-to-High,<br>t <sub>PLH</sub>                        | TTL to CMOS<br>V <sub>DD</sub> > V <sub>CC</sub>  | 5                   | 10                  | 140    | 280  | ns    |
|   | CMOS to CMOS<br>V <sub>DD</sub> > V <sub>CC</sub> | 5                   | 15                  | 140    | 280  |       |
|   | CMOS to CMOS<br>V <sub>CC</sub> > V <sub>DD</sub> | 5                   | 10                  | 120    | 240  |       |
|   |   | 5                   | 15                  | 120    | 240  |       |
|   |   | 10                  | 15                  | 70     | 140  |       |
|   |   | 10                  | 5                   | 200    | 400  |       |
|   |   | 15                  | 5                   | 200    | 400  |       |
|   |   | 15                  | 10                  | 60     | 120  |       |
| Transition Time,<br>t <sub>THL</sub> , t <sub>TLH</sub> | All Modes   |                     | 5                   | 100    | 200  | ns    |
|   |   |                     | 10                  | 50     | 100  |       |
|   |   |                     | 15                  | 40     | 80   |       |
| Input Capacitance,<br>C <sub>IN</sub>                   | Any Input   |                     |                     | 5      | 7.5  | pF    |

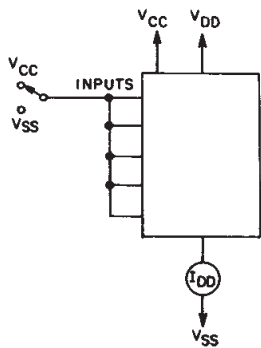

92CS-29452


Fig. 6 - Quiescent device current.

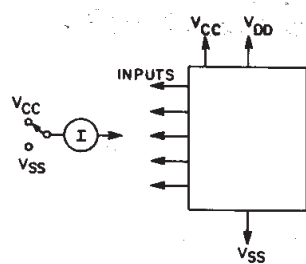

92CS-29454

Fig. 7 - Input current.

NOTE:  
MEASURE INPUTS  
SEQUENTIALLY,  
TO BOTH V<sub>DD</sub> AND V<sub>SS</sub>.  
CONNECT ALL UNUSED  
INPUTS TO EITHER  
V<sub>CC</sub> OR V<sub>SS</sub>.

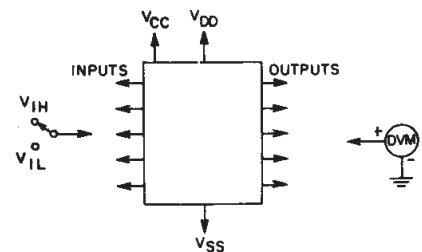

92CS-29453

NOTE:  
TEST ANY COMBINATION  
OF INPUTS

Fig. 8 - Input voltage.

3  
COMMERCIAL CMOS  
HIGH VOLTAGE ICs

# CD4504B Types

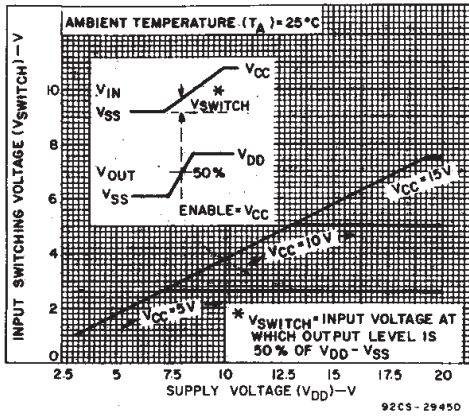


Fig. 9 - Typical input switching as a function of high-level supply voltage. (SELECT at  $V_{CC}$ -CMOS mode).

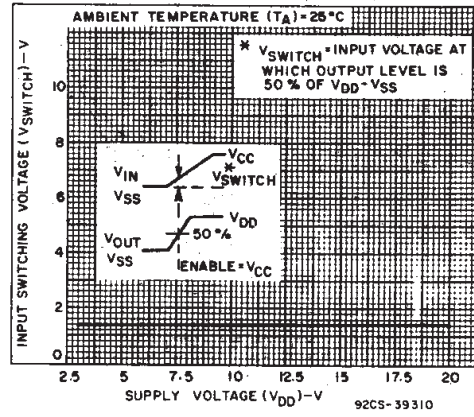


Fig. 10 - Typical input switching as a function of high-level supply voltage (SELECT at  $V_{SS}$ -TTL mode).


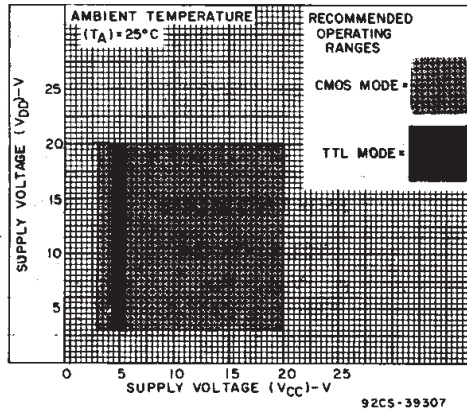


Fig. 11 - High-level supply voltage vs. low-level supply voltage.

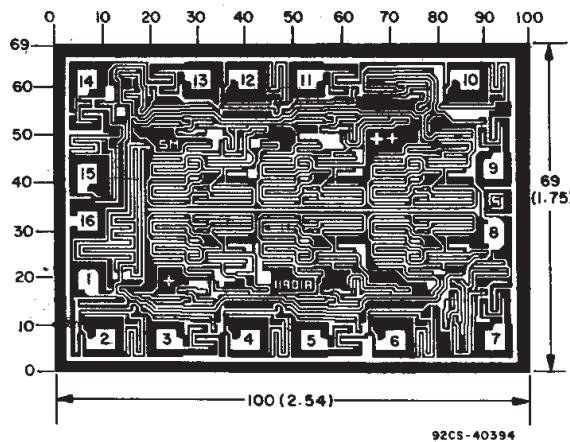

Dimensions in parentheses are in millimeters and are derived from the basic inch dimensions as indicated. Grid graduations are in mils ( $10^{-3}$  inch).

Dimensions and pad layout for CD4504BH.

**PACKAGING INFORMATION**

| Orderable Device | Status<br>(1) | Package Type | Package Drawing | Pins | Package Qty | Eco Plan<br>(2)         | Lead/Ball Finish<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|------------------|---------------|--------------|-----------------|------|-------------|-------------------------|-------------------------|----------------------|--------------|-------------------------|-------------------------|
| CD4504BE         | ACTIVE        | PDIP         | N               | 16   | 25          | Green (RoHS & no Sb/Br) | CU NIPDAU               | N / A for Pkg Type   | -55 to 125   | CD4504BE                | <a href="#">Samples</a> |
| CD4504BEE4       | ACTIVE        | PDIP         | N               | 16   | 25          | Green (RoHS & no Sb/Br) | CU NIPDAU               | N / A for Pkg Type   | -55 to 125   | CD4504BE                | <a href="#">Samples</a> |
| CD4504BF3A       | ACTIVE        | CDIP         | J               | 16   | 1           | TBD                     | A42                     | N / A for Pkg Type   | -55 to 125   | CD4504BF3A              | <a href="#">Samples</a> |
| CD4504BM         | ACTIVE        | SOIC         | D               | 16   | 40          | Green (RoHS & no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | -55 to 125   | CD4504BM                | <a href="#">Samples</a> |
| CD4504BM96       | ACTIVE        | SOIC         | D               | 16   | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | -55 to 125   | CD4504BM                | <a href="#">Samples</a> |
| CD4504BM96E4     | ACTIVE        | SOIC         | D               | 16   | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | -55 to 125   | CD4504BM                | <a href="#">Samples</a> |
| CD4504BME4       | ACTIVE        | SOIC         | D               | 16   | 40          | Green (RoHS & no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | -55 to 125   | CD4504BM                | <a href="#">Samples</a> |
| CD4504BMG4       | ACTIVE        | SOIC         | D               | 16   | 40          | Green (RoHS & no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | -55 to 125   | CD4504BM                | <a href="#">Samples</a> |
| CD4504BMT        | ACTIVE        | SOIC         | D               | 16   | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | -55 to 125   | CD4504BM                | <a href="#">Samples</a> |
| CD4504BPW        | ACTIVE        | TSSOP        | PW              | 16   | 90          | Green (RoHS & no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | -55 to 125   | CM504B                  | <a href="#">Samples</a> |
| CD4504BPWE4      | ACTIVE        | TSSOP        | PW              | 16   | 90          | Green (RoHS & no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | -55 to 125   | CM504B                  | <a href="#">Samples</a> |
| CD4504BPWR       | ACTIVE        | TSSOP        | PW              | 16   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU               | Level-1-260C-UNLIM   | -55 to 125   | CM504B                  | <a href="#">Samples</a> |

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

---

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of  $\leq 1000$ ppm threshold. Antimony trioxide based flame retardants must also meet the  $\leq 1000$ ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**OTHER QUALIFIED VERSIONS OF CD4504B, CD4504B-MIL :**



- Catalog: [CD4504B](#)
- Enhanced Product: [CD4504B-EP](#), [CD4504B-EP](#)
- Military: [CD4504B-MIL](#)

**NOTE: Qualified Version Definitions:**


- Catalog - TI's standard catalog product
- Enhanced Product - Supports Defense, Aerospace and Medical Applications
- Military - QML certified for Military and Defense Applications

**TAPE AND REEL INFORMATION**

**REEL DIMENSIONS**

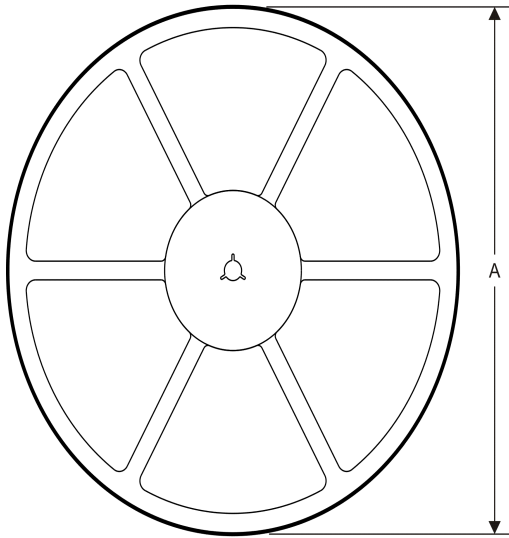

**TAPE DIMENSIONS**

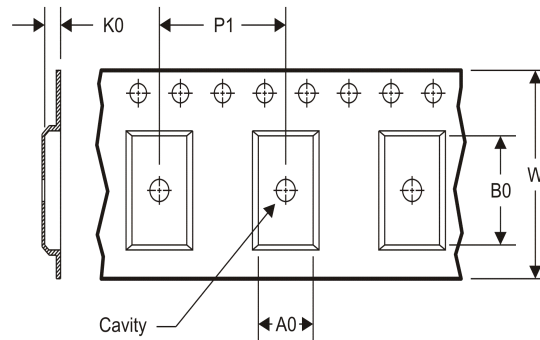

|    |   |
|----|---|
| A0 | Dimension designed to accommodate the component width     |
| B0 | Dimension designed to accommodate the component length    |
| K0 | Dimension designed to accommodate the component thickness |
| W  | Overall width of the carrier tape                         |
| P1 | Pitch between successive cavity centers                   |

**TAPE AND REEL INFORMATION**

\*All dimensions are nominal

| Device     | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| CD4504BM96 | SOIC         | D               | 16   | 2500 | 330.0              | 16.4               | 6.5     | 10.3    | 2.1     | 8.0     | 16.0   | Q1            |
| CD4504BPWR | TSSOP        | PW              | 16   | 2000 | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |

**TAPE AND REEL BOX DIMENSIONS**


\*All dimensions are nominal

| Device     | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|------------|--------------|-----------------|------|------|-------------|------------|-------------|
| CD4504BM96 | SOIC         | D               | 16   | 2500 | 333.2       | 345.9      | 28.6        |
| CD4504BPWR | TSSOP        | PW              | 16   | 2000 | 367.0       | 367.0      | 35.0        |

D (R-PDSO-G16)

PLASTIC SMALL OUTLINE



- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
  - D. Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
  - E. Reference JEDEC MS-012 variation AC.

D (R-PDSO-G16)

PLASTIC SMALL OUTLINE



- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Publication IPC-7351 is recommended for alternate designs.
  - D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
  - E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.


# PW0016A



# PACKAGE OUTLINE

## TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

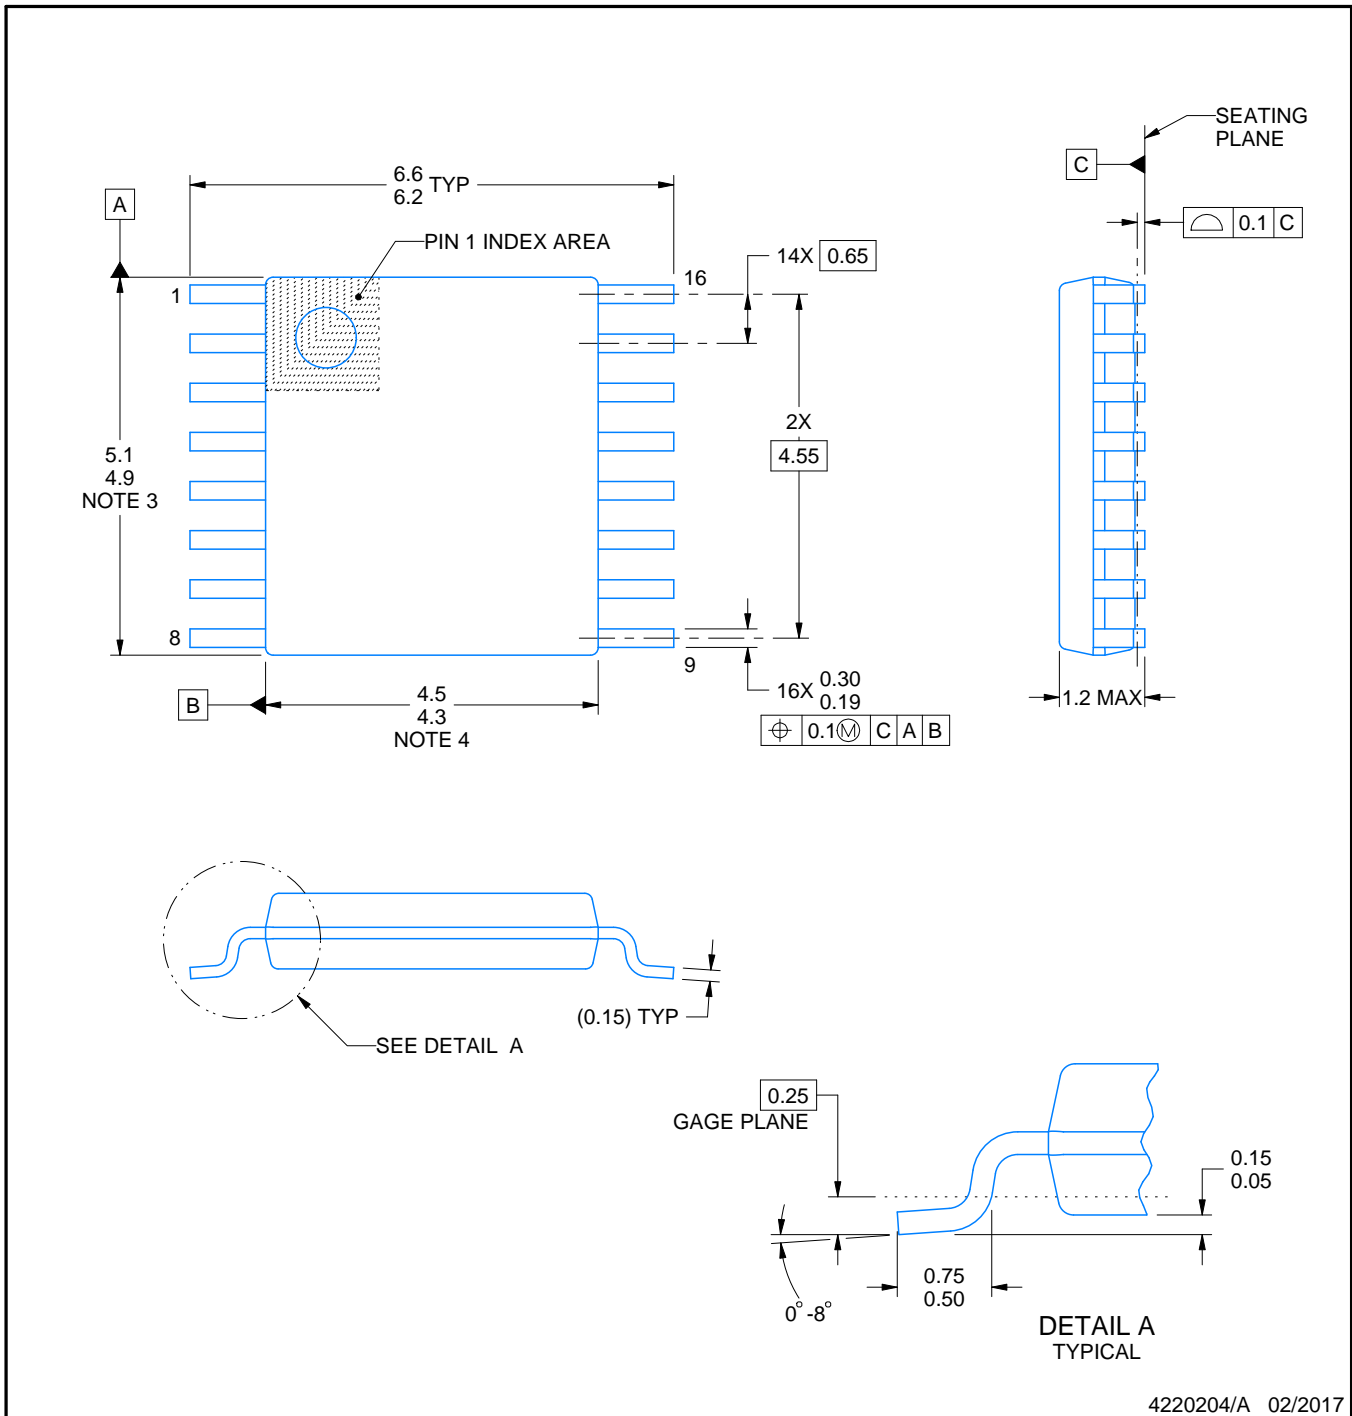

4220204/A 02/2017

### NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-153.

# EXAMPLE BOARD LAYOUT


PW0016A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE



LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE: 10X

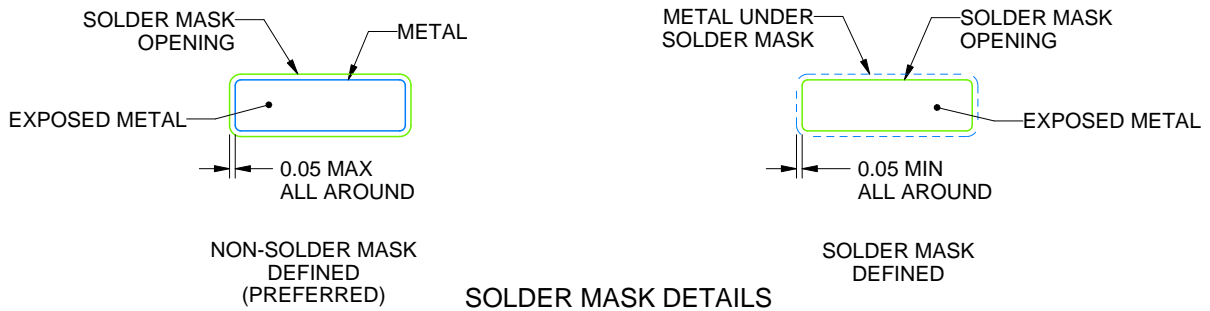

4220204/A 02/2017

NOTES: (continued)

- 6. Publication IPC-7351 may have alternate designs.
- 7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

# EXAMPLE STENCIL DESIGN

PW0016A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE



SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE: 10X

4220204/A 02/2017

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

J (R-GDIP-T\*\*)

14 LEADS SHOWN

CERAMIC DUAL IN-LINE PACKAGE



| DIM \ PINS ** | 14                     | 16                     | 18                     | 20                     |
|---------------|------------------------|------------------------|------------------------|------------------------|
| A             | 0.300<br>(7,62)<br>BSC | 0.300<br>(7,62)<br>BSC | 0.300<br>(7,62)<br>BSC | 0.300<br>(7,62)<br>BSC |
| B MAX         | 0.785<br>(19,94)       | .840<br>(21,34)        | 0.960<br>(24,38)       | 1.060<br>(26,92)       |
| B MIN         | —                      | —                      | —                      | —                      |
| C MAX         | 0.300<br>(7,62)        | 0.300<br>(7,62)        | 0.310<br>(7,87)        | 0.300<br>(7,62)        |
| C MIN         | 0.245<br>(6,22)        | 0.245<br>(6,22)        | 0.220<br>(5,59)        | 0.245<br>(6,22)        |



4040083/F 03/03

- NOTES:
- All linear dimensions are in inches (millimeters).
  - This drawing is subject to change without notice.
  - This package is hermetically sealed with a ceramic lid using glass frit.
  - Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.
  - Falls within MIL STD 1835 GDIP1-T14, GDIP1-T16, GDIP1-T18 and GDIP1-T20.

N (R-PDIP-T\*\*)

PLASTIC DUAL-IN-LINE PACKAGE

16 PINS SHOWN



- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).
  - The 20 pin end lead shoulder width is a vendor option, either half or full width.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale ([www.ti.com/legal/termsofsale.html](http://www.ti.com/legal/termsofsale.html)) or other applicable terms available either on [ti.com](http://ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2018, Texas Instruments Incorporated

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View CD4504BE](#) on WIN SOURCE

 [Texas Instruments](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management