



**THE DATASHEET OF
NH25M22TA-10M-NSA3566A**



NH25M22TA Oven Controlled Crystal Oscillator (OCXO) for Fixed Communication Equipment


■ Main Application

- Mobile phone base station(5G CU, 4G BBU)
- IEEE1588, synchronous Ethernet clock (SyncE) • Optical transmission system
- Stratum 3E • Frequency Synthesizer • Timing and synchronization measuring equipment

■ Features

- Excellent temperature characteristics.
- Excellent Long-term frequency stability.
- Very quick stabilization time.
- Hermetic sealing package for excellent environmental-proof performance.


RoHS Compliant
Directive 2011/65/EU
Directive (EU) 2015/863

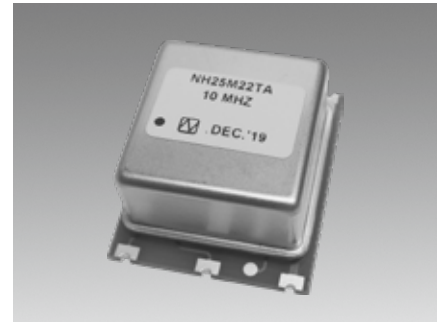

■ Specifications

Item	Model	NH25M22TA
Nominal Frequency f_{nom} (MHz)		5, 10, 12.8, 13, 19.2, 20, 25.6, 30.72, 38.88, 40
Supply Voltage V_{CC} (V)		+3.3
Load Impedance C_L (pF)		15
Operating Temperature Range T_{opr} (°C)		-40 to +85
Storage Temperature Range T_{str} (°C)		-40 to +85
Power Consumption P_{CC} (W)	at start	Max. 4.0
	when stable, at +25 °C	Max. 1.2
Frequency Tolerance $\Delta f/f_{nom}$	at +25°C, before shipment	Max. 100×10^{-9}
Frequency/Temperature Characteristics $\Delta f/f$	at Operating Temperature Range	Max. $\pm 1 \times 10^{-9}$
Frequency/Voltage Coefficient $\Delta f/f$	$V_{CC} \pm 5\%$	Max. $\pm 1 \times 10^{-9}$
Long-term Frequency Stability $\Delta f/f$	Based on frequency after 30 days operation	Max. $\pm 0.5 \times 10^{-9}$ / day
		Max. $\pm 50 \times 10^{-9}$ / year
Stabilization Time (min.)	Time within specified frequency tolerance after power on at +25°C, based on frequency after 60minutes operation.	Max. 5 / within $\pm 100 \times 10^{-9}$
Frequency Control Range $\Delta f/f$		$V_{cont} = +1.4V \pm 1.4V$
		Min. $\pm 1 \times 10^{-6}$
Frequency Change Polarity		Positive
Output Voltage		LVC MOS V_{OL} : Max. +0.3 V V_{OH} : Min. +3.0 V
Symmetry (%)	at ($V_{OH} + V_{OL}$) / 2	45 to 55
Specification Number		NSC5244A

■ Dimensions

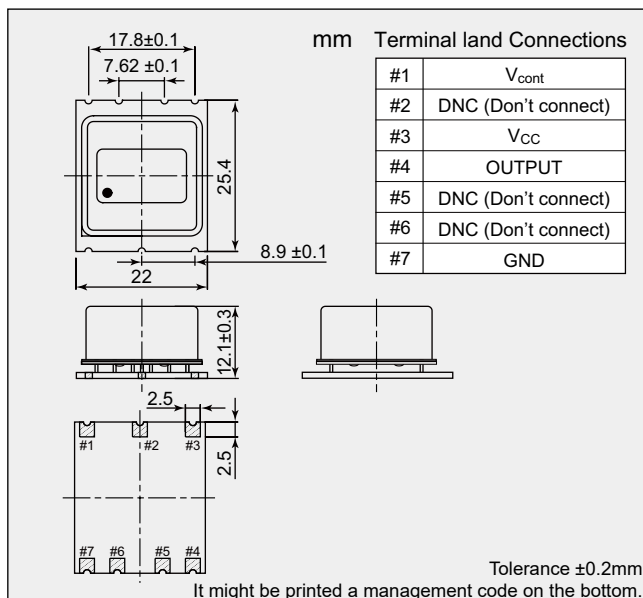

■ Reference Value

	Offset Frequency	dBc/Hz
Phase Noise (at 10 MHz)	1 Hz	Typ. -80
	10 Hz	Typ. -105
	100 Hz	Typ. -130
	1 kHz	Typ. -150
	10 kHz	Typ. -160
	100 kHz	Typ. -160

We offer dedicated tool (charge) for evaluation of this product

Please specify the model name, frequency, and specification number when you order products.
For further questions regarding specifications, please feel free to contact us.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View NH25M22TA-10M-NSA3566A on WIN SOURCE](#)
-  [NDK Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management