



THE DATASHEET OF CDBV140-G



SMD Schottky Barrier Diode



SMD Diodes Specialist

CDBV120-G THRU. CDBV140-G

$I_o=1.0A$

$V_R=20 \sim 40V$

RoHS Device




Features

- For use in low voltage, high frequency inverters.
- Free wheeling, and polarity protection applications.

Mechanical Data

- Case: Molded plastic SOD-323
- Terminals: Solderable per MIL-STD-750, Method 2026.1.
- Polarity: Indicated by cathode band.
- Mounting position: Any.
- Marking:

CDBV120-G : SJ
 CDBV130-G : SK
 CDBV140-G : SL

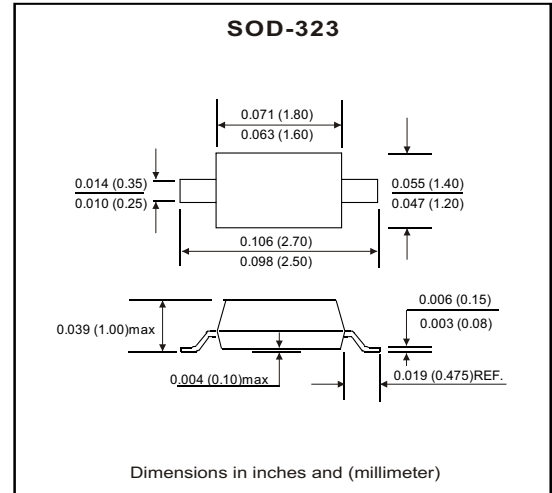

Maximum Ratings (at $T_A=25^{\circ}C$ unless otherwise specified)

Parameter	Symbol	CDBV120-G	CDBV130-G	CDBV140-G	Unit
Non-repetitive peak reverse voltage	V_{RM}	20	30	40	V
Peak repetitive peak reverse voltage Working peak reverse voltage DC blocking voltage	V_{RRM} V_{RWM} V_R	20	30	40	V
RMS reverse voltage	$V_{R(RMS)}$	14	21	28	V
Average rectified output current	I_o	1			A
Peak forward surge current @ $T_p=8.3mS$	I_{FSM}	25			A
Repetitive peak forward current	I_{FRM}	625			mA
Power dissipation	P_D	200			mW
Thermal resistance (junction to ambient)	$R_{\theta JA}$	625			$^{\circ}C/W$
Storage temperature	T_{STG}	-65~+150			$^{\circ}C$

Electrical Characteristics (at $T_A=25^{\circ}C$ unless otherwise specified)

Parameter	Conditions	Symbol	Min.	Max.	Unit
Reverse breakdown voltage	$I_R=1mA$ CDBV120-G CDBV130-G CDBV140-G	V_{BR}	20 30 40		V
Reverse leakage current	$V_R=20V$ $V_R=30V$ $V_R=40V$ CDBV120-G CDBV130-G CDBV140-G	I_R		1	mA
Forward voltage	$I_F=1.0A$ CDBV120-G CDBV130-G CDBV140-G	V_F		0.45 0.55 0.60	V
	$I_F=3.0A$ CDBV120-G CDBV130-G CDBV140-G	V_F		0.75 0.875 0.90	V
Diode Capacitance	$V_R=4V, f=1MHz$	C_D		120	pF

ELECTRICAL CHARACTERISTIC CURVES (CDBV120-G thru. CDBV140-G)

Fig.1 Forward Current Derating Curve

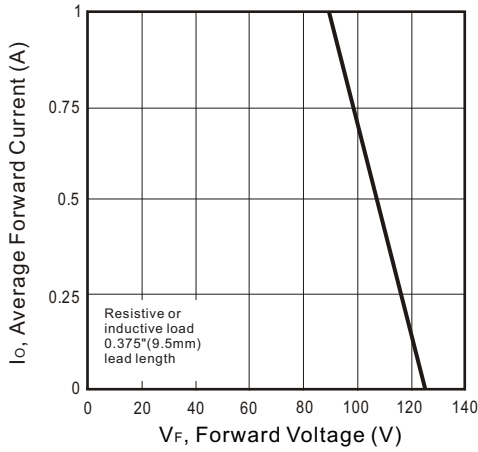


Fig.2 Maximum Non-repetitive Peak Forward Surge Current

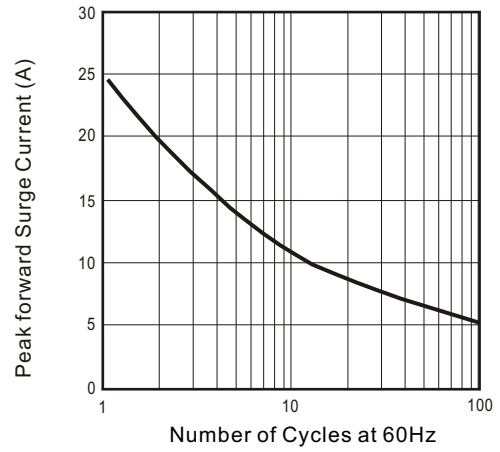


Fig.3 Typical Instantaneous Forward Characteristics

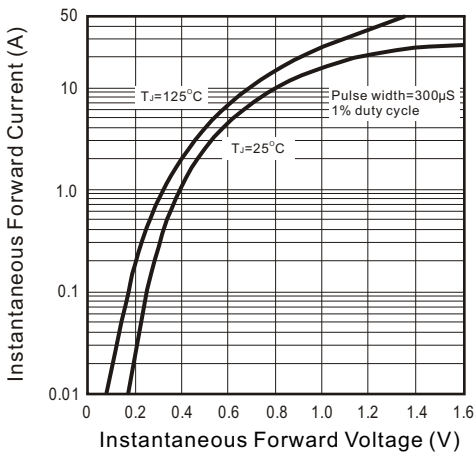


Fig.4 Typical Reverse Characteristics

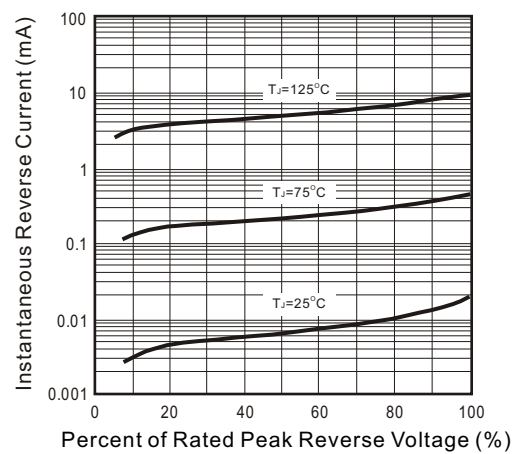


Fig.5 Typical Junction Capacitance


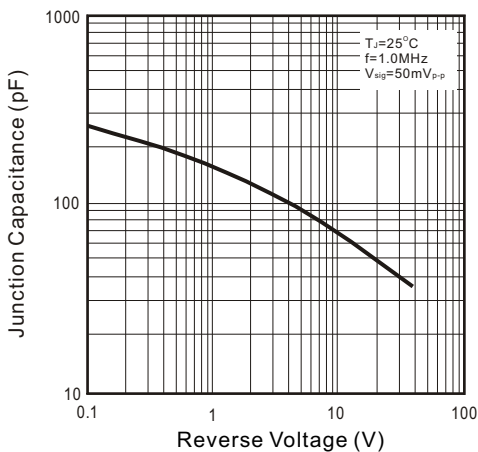




Fig.6 Typical Transient Thermal Impedance

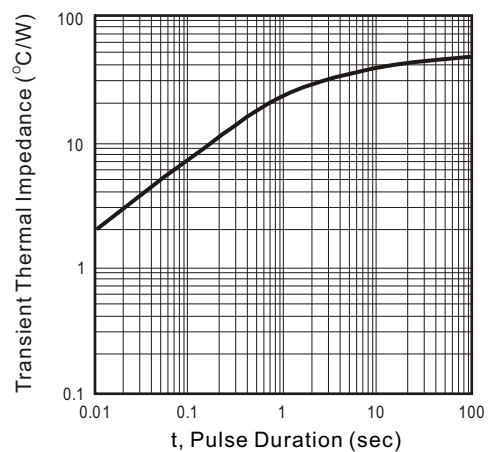

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View CDBV140-G on WIN SOURCE](#)
-  [Comchip Technology Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management