






**THE DATASHEET OF  
NX5032GA-16.000M-STD-CSU-2**



## Specification of Crystal Unit

1	NDK PART NUMBER	NX5032GA (STD-CSU-1)(STD-CSU-2) NX5032GA
5	Type	
6	Electrical characteristics	* ATTACHED SHEETS 3
6.1	Nominal frequency(F0)	8MHZ to40MHZ
6.2	Overtone order	Fundamental
6.3	Adjustment tolerance	$\pm 50 \times 10^{-6}$ max. (+25 °C)
6.4	Tolerance over the temperature range	$\pm 150 \times 10^{-6}$ max. (-40~+150 °C) The reference temperature shall be +25 °C.
6.5	Equivalent resistance (R1)	*ATTACHED SHEETS 3
6.6	Shunt Capacitance (C0)	NA
6.7	Motional Capacitance (C1)	500 $\mu$ W max.
7	Measurement circuit	
7.2	Frequency measurement	$\pi$ circuit
7.1.1	Measuring instrument	8pF
7.1.2	Load capacitance(CL)	10 $\mu$ W
7.1.3	Level of drive	
7.2	Equivalent resistance measurement	$\pi$ circuit
7.2.1	Measuring instrument	Series
7.2.2	Load capacitance(CL)	10 $\mu$ W
7.2.3	Level of drive	

## 8 Dimension

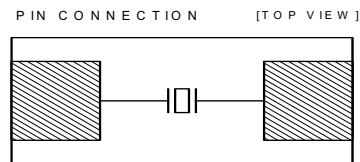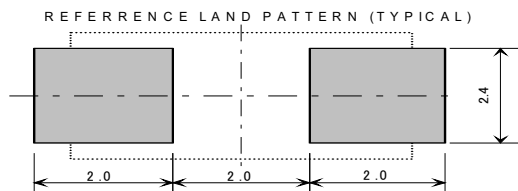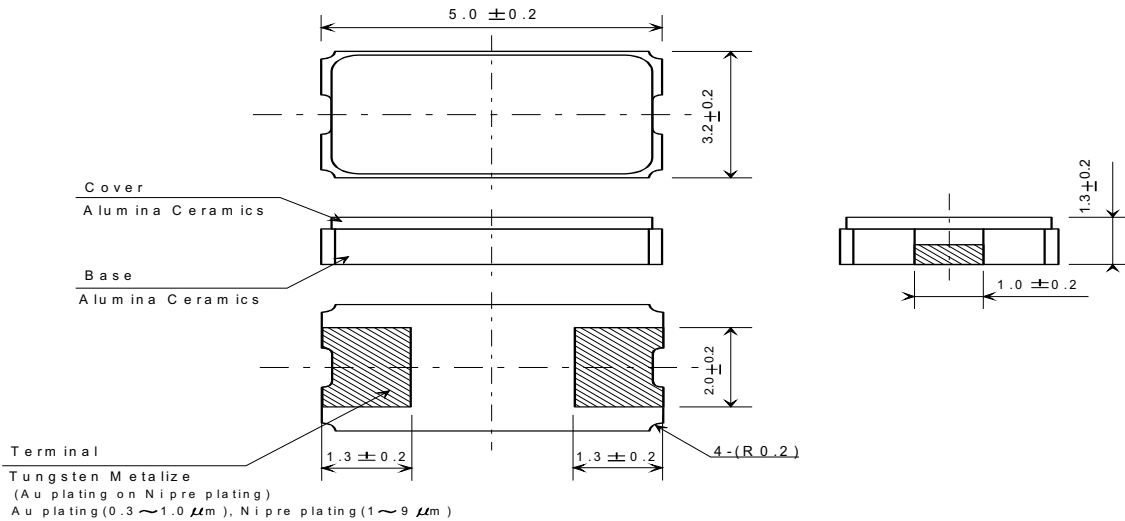

Frequency(MHz)	CI(ESR)
8	300
10	120 ohm
12	120 ohm
16	120 ohm
20	70 ohm
40	50 ohm

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View NX5032GA-16.000M-STD-CSU-2 on WIN SOURCE](#)
- ⊖ [NDK Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management