



THE DATASHEET OF KUSBX-SMT-CS2-BTR





UNIVERSAL SERIAL BUS: KUSBX-SMT Series

USB Type C Top Mount - Dual Row SMT Contacts

Product Features

USB Version 3.1 - Gen2 (10Gbps)
Dual Row SMT Contacts with Through Hole Shield Tabs

Performance Specifications

Materials and Finish

Insulator

High Temperature, UL94V-0 Rated,
Color Black, White available with mins

Contact Material:

Copper Alloy

Plating:

Gold 30 μ " plated on both Contact Area and on Solder Tails.

Shield:

Stainless Steel, Min. 50 μ " Nickel Plated

Electrical Characteristics

Rated Voltage:

100V AC

Current Rating

VBUS Pins, GND Pins : 3A

VCONN 1.25A

Other Pins 0.25A

Contact Resistance

40 milliohms Max.

Insulation Resistance

100 Megohms Min.

Dielectric Withstanding Voltage

100V AC RMS For 1 Minute

Mechanical Characteristics:

Insertion Force: 5N- 20N

Extraction Force: 8N - 20N

Durability 10000 Mating Cycles Min.

Operating Temperature:

-30°C to +85°C

2D Drawing	IGES	STEP	3D PDF
Solder Profile	CofC RoHS Compliant	CofC REACH Compliant	UL Plastic File
Certificate of Origin	Check Stock	Request a Sample	Send Us An Email

Generated Part Number

Part Number Builder

<input type="text"/>	-	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Series		Type	Insulator Color	Plating	Packaging

Series

KUSBX-SMT - USB Top Mount - Dual Row Contacts

Type

CS2 - C Type

Insulator Color Option

B - Black

W - White

Plating Option

30 - 30 μ " Gold Plating

Blank - Gold Plating



Packaging

TR - Tape and Reel

Contact Kycon for more options

KUSBX-SMT

Dimensions in mm

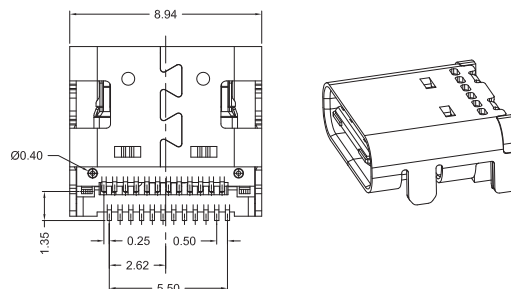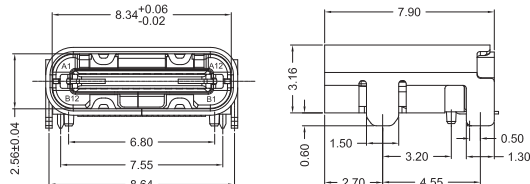

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View KUSBX-SMT-CS2-BTR on WIN SOURCE](#)

 [Kycon, Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management