



**THE DATASHEET OF
TL3700AF100QG**



KEY SELLING POINT


With dimensions of 3.0mm x 2.6mm x 0.65mm, this switch gives new meaning to an ultra-miniature tactile switch.

FEATURES & BENEFITS

- 3.0mm (W) x 2.6mm (L) x 0.65mm (H) dimensions
- Up to 100,000 cycle life expectancy
- 100gf and 160gf options

MARKETS

- Audio / Visual
- Computer Peripherals
- Consumer Electronics
- Handheld Devices
- Medical Equipment
- Telecommunication

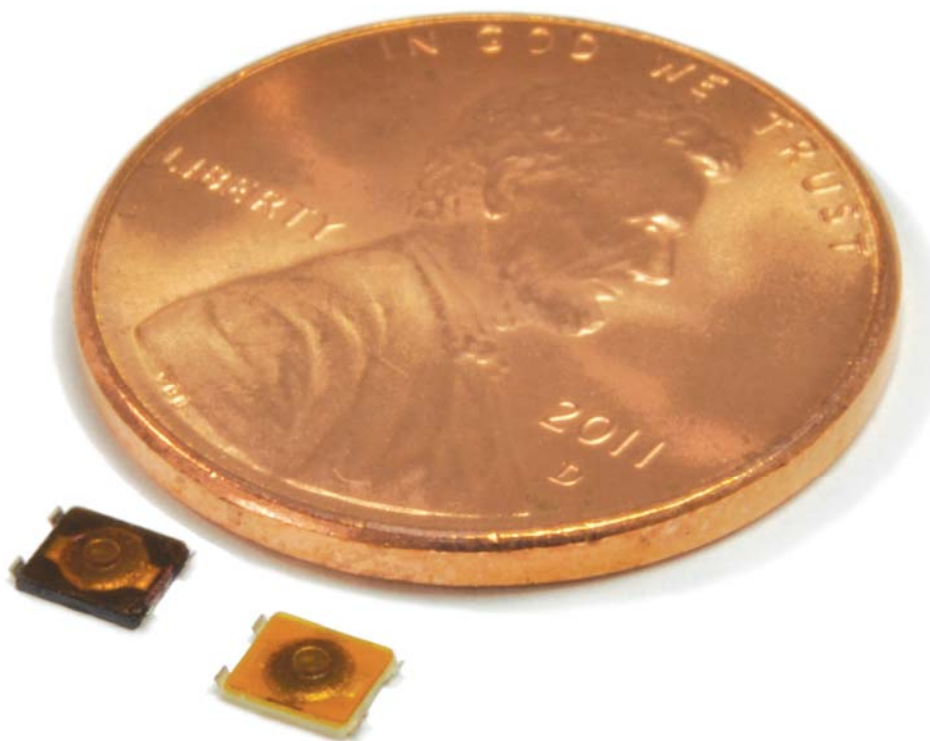

SPECIFICATIONS

Electrical Rating: 20mA @ 15VDC
Life Expectancy: up to 100,000 Cycles
Contact Resistance: 500mΩ Max.
Insulation Resistance: 100MΩ Min. at 500VDC
Dielectric Strength: 250VAC for 1 Minute
Operating Temperature: -40°C to 85°C Min.
Operating Force: 100gf and 160gf
Travel: 0.15mm

Function: SPST, Off-(On)

RoHS



E-SWITCH®

LAMB™ INDUSTRIES

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View TL3700AF100QG on WIN SOURCE](#)

 [E-Switch Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management