THE DATASHEET OF

FPC07182

www.win-source.net 0086-755-83957316

DLI DIELECTRIC LABORATORIES
a Knowles Precision Devices brand

knowles PRECISION DEVICES

20 to 40GHz 10dB Symmetrical Directional Coupler

FPC07182

www.knowlescapacitors.com

DESCRIPTION

DLI brand directional couplers utilize DLI's high dielectric ceramic materials to deliver small size and minimal performance variation over temperature. The components are well matched for monitoring incident and reflected power.

FEATURES

- Small Size
- Excellent Repeatability
- Surface Mountable
- Moisture Sensitivity Level: MSL1
- Frequency Stable over Temperature
- Operating & Storage Temp: -55˚C to +125˚C
- Characteristic Impedance: 50Ω

Packaging and Ordering Information: To request Tape and Reel packaging, please order part number FPC07182-T, see additional data on page 5.

Certified System ISO 9001 QMI-SAI Global

Certified System AS 9100 QMI-SAI Global

RoHS 2011/65/EU Lead Free

SPECIFICATIONS*

Parameter	Frequency (GHz)	Min	Max
Passband Insertion Loss* (dB)	20 - 40		1.5
Passband Return Loss (dB)		10	
Coupling (dB)		8.5	11.5
Directivity (dB)		10	
CW Input Power (W)**			14
Size (L x W x H)	0.065 x 0.050 x 0.010 in 1.651 x 1.270 x 0.254 mm		

*Electrical specifications based on typical mounted performance at room temperature. Insertion loss shall vary ±0.5dB over temperature.

** Power rating assumes the component will be mounted to a PCB with good thermally conducting ground vias as outlined in the recommended PCB layout that are connected to an adequate heat sink. Max power is based on 125°C base temperature.

Information in this document is for informational and guideline purposes only. All information regarding the Product described in this datasheet is subject to change from time to time at Knowles Precision Devices' sole discretion. It is the customer's sole responsibility to evaluate the suitability of the Product in the customer's particular application. Knowles Precision Devices assumes no responsibility or liability for the use of the information contained within.

2777 Route 20 East, Cazenovia, NY 13035| Phone: (315)655-8710

To Order Contact KCCSales@knowles.com | For Technical Inquiries Contact DLIengineering@knowles.com

20 to 40GHz 10dB Symmetrical Directional Coupler

FPC07182

Typical Measured Performance

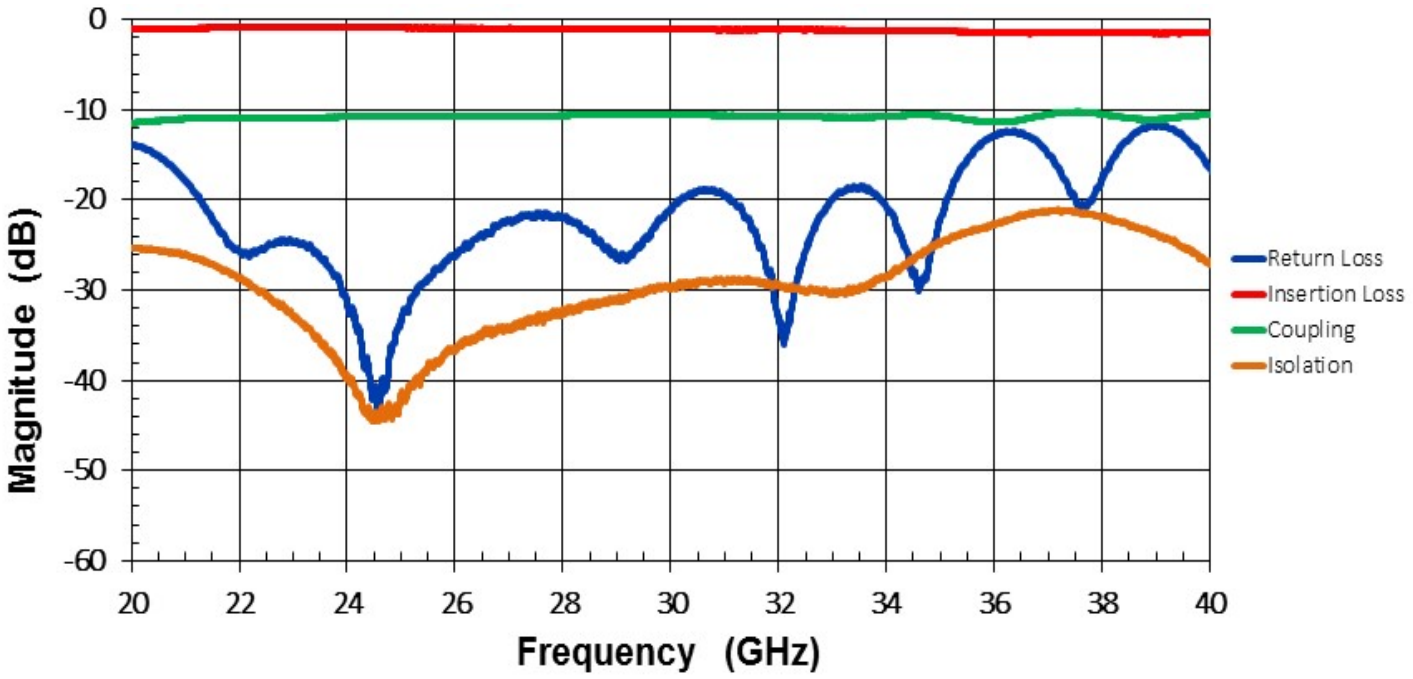

*Typical de-embedded measured performance mounted on a connectorized test fixture. DEB is 0.010in RO4350B with 50.0Ohm CPW ground traces going into the ports at room temperature.

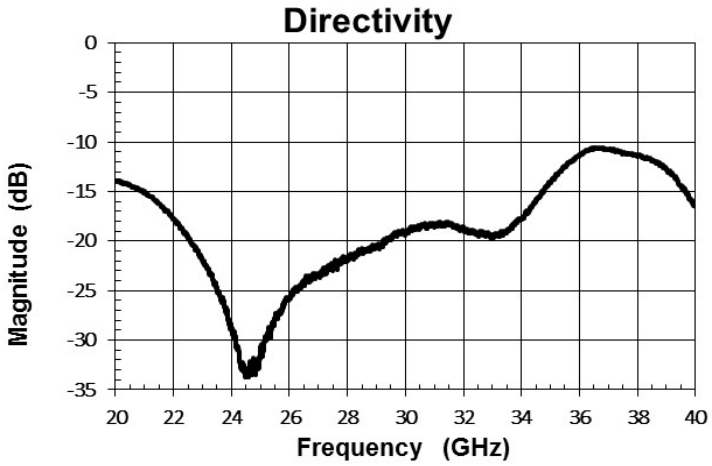

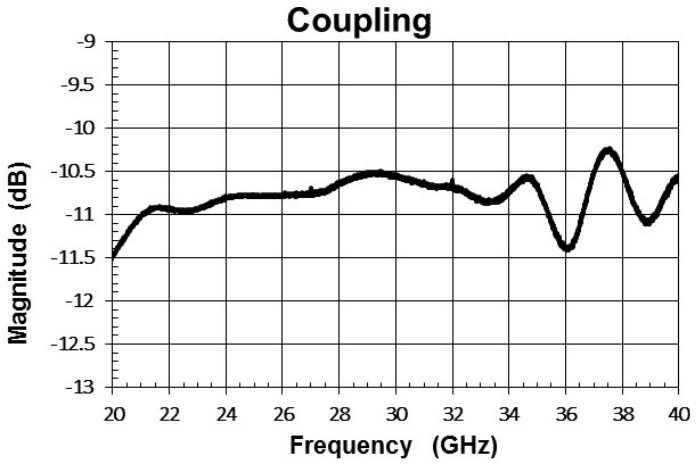

2777 Route 20 East, Cazenovia, NY 13035| Phone: (315)655-8710

To Order Contact KCCSales@knowles.com | For Technical Inquiries Contact DLIengineering@knowles.com

DIELECTRIC LABORATORIES
a Knowles Precision Devices brand

knowles PRECISION DEVICES

20 to 40GHz 10dB Symmetrical Directional Coupler

FPC07182

www.knowlescapacitors.com

Physical Dimensions

Units = inches

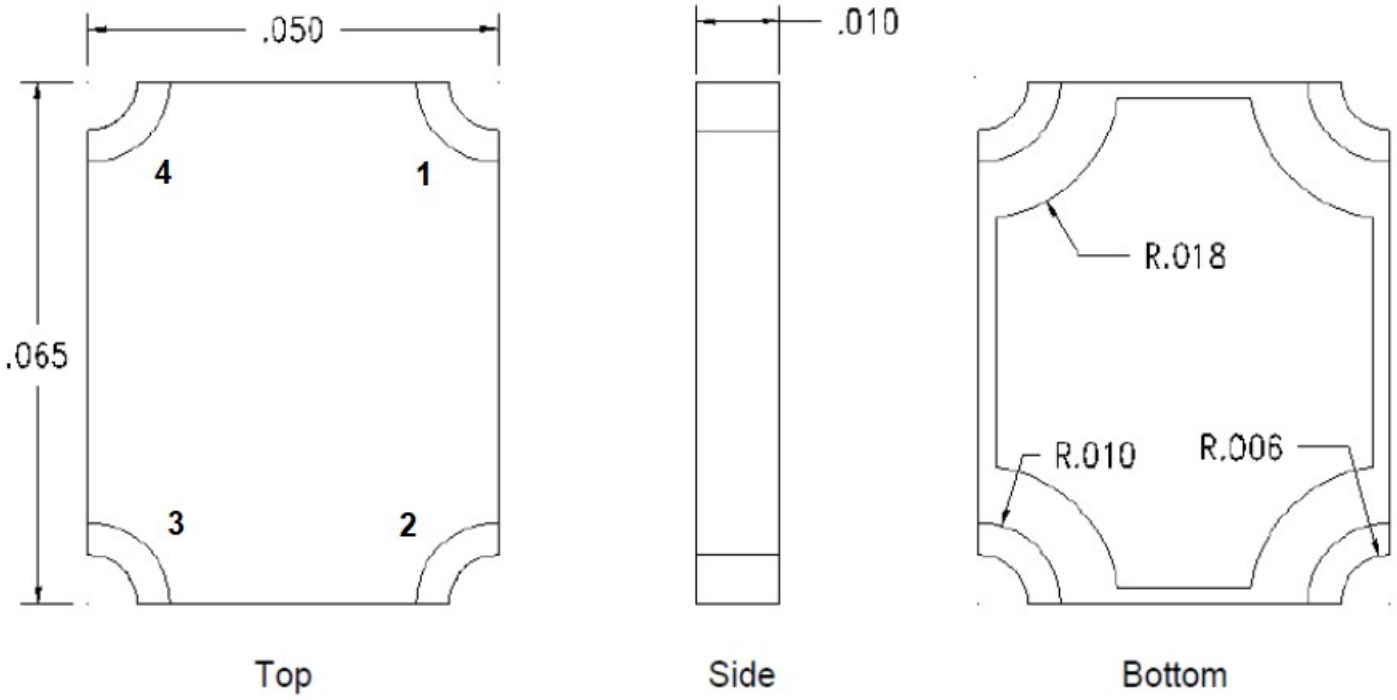

Notes :

1. Termination Finish:

- ENIG: 3 - 6 µinch Au over 50 µinch Ni
- Maximum Assembly Process Temperature: 250°C

Tolerances:

- For values with 3 decimal places ±0.001
- For values with 4 decimal places ±0.0005

FPC07181 Coupler Port Configuration				
	Port 1	**Port 2**	**Port 3**	**Port 4**
Configuration 1	Input	Output	Isolated	Coupled
Configuration 2	Output	Input	Coupled	Isolated
Configuration 3	Coupled	Isolated	Output	Input
Configuration 4	Isolated	Coupled	Input	Output

2777 Route 20 East, Cazenovia, NY 13035| Phone: (315)655-8710

To Order Contact KCCSales@knowles.com | For Technical Inquiries Contact DLIengineering@knowles.com

Recommended PCB Layout (unit inch)

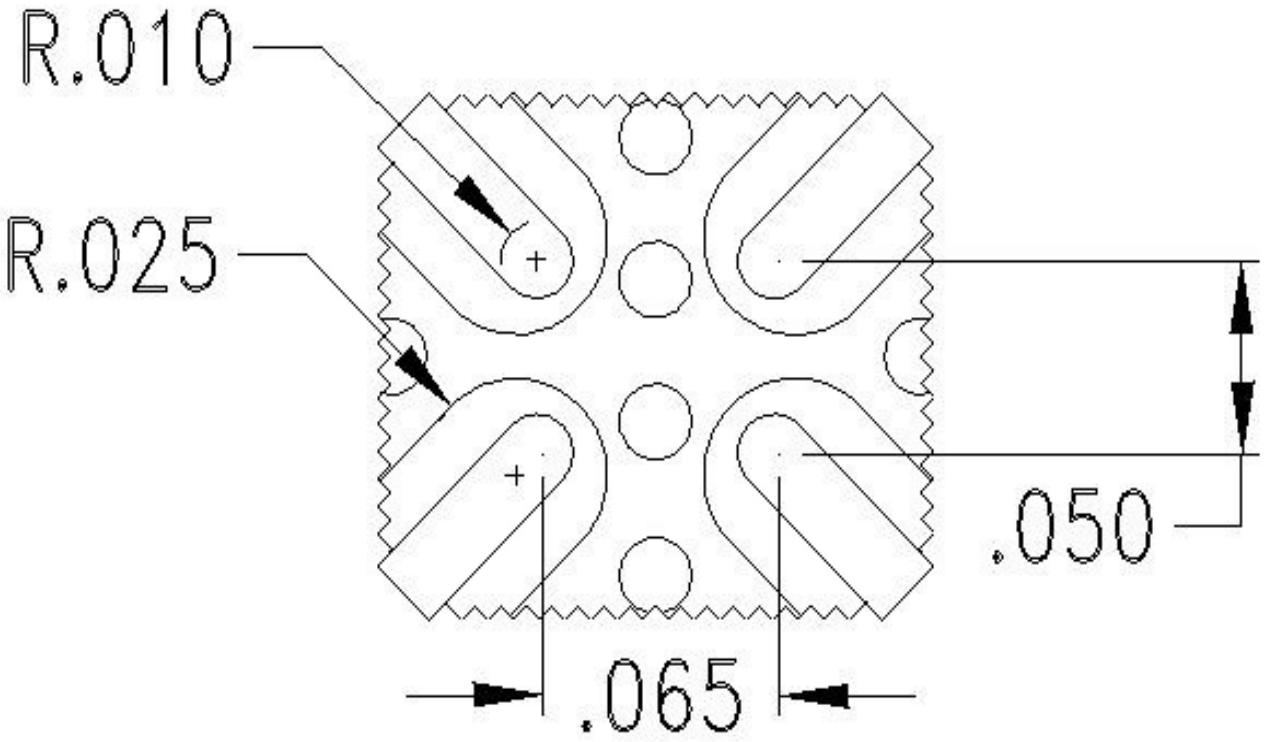

- 50Ω trace dimensions are application specific.
- 50Ω trace dimensions are designed for 10mil thick R04350B Rogers Board .
- Ensure adequate grounding beneath the part.
- Trace feed locations can be horizontal, vertical, or angled.

For further details and best practices, reference the **Microwave Products Guide,** available at: https://www.knowlescapacitors.com/Support/Catalogs

TAPE AND REEL INFORMATION

REEL DIMENSIONS

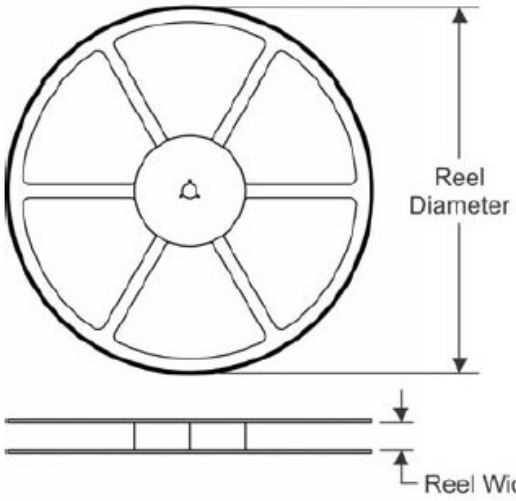

TAPE DIMENSIONS

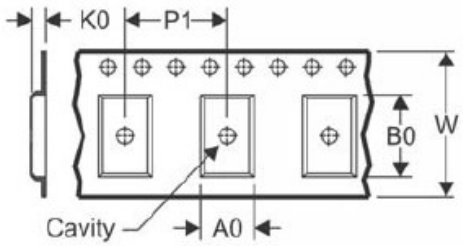

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

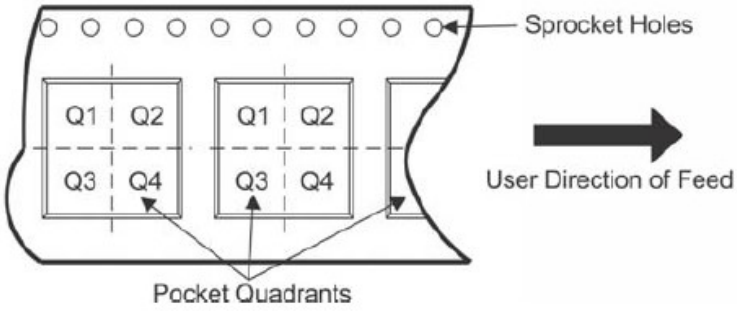

*All dimensions are nominal

Device	Package Type	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
FPC07182-T	SMD	180	12.4	2.4	2.6	1.	8	12	Q1&2

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- View FPC07182 on WIN SOURCE
- Knowles Dielectric Labs Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- Global Sourcing Solution
- Obsolete Management
- Cost Control Management
- Shortage Management
- Alternative Solution
- Excess Inventory Management