WINSOURCE ELECTRONICS

THE DATASHEET OF

RMK-3-92+

X3 Frequency Multiplier

RMK-3-92+

50Ω Output 450 to 900 MHz

Generic photo used for illustration purposes only

CASE STYLE: TT1224

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost

Reel Size	Devices/Reel
7"	10, 20, 50, 100, 200
13"	500

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Input Power	20 dBm

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

INPUT	1
OUTPUT	4
GROUND	2,3,5,6

Features

- low conversion loss, 14 dB typ.
- high rejection of adjacent harmonics, 66 dBc typ.
- aqueous washable

Applications

- synthesizers
- local oscillators
- satellite up and down converters

Outline Drawing

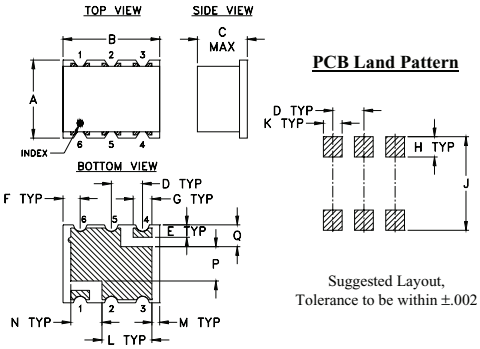

Outline Dimensions (inch / mm)

A	B	C	D	E	F	G	H
.25	.31	.16	.100	.040	.055	.060	.065
6.35	7.87	4.06	2.54	1.02	1.40	1.52	1.65

J	K	L	M	N	P	Q	wt.
.300	.060	.160	.025	.100	.110	.070	grams
7.62	1.52	4.06	0.64	2.54	2.79	1.78	0.16

Demo Board MCL P/N: TB-393
Suggested PCB Layout (PL-258)

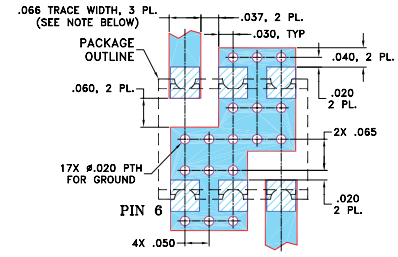

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Electrical Specifications at 25°C

Parameter		Min.	Typ.	Max.	Unit
Multiplier Factor			3		
Frequency Range, Input (F1)		150	—	300	MHz
Frequency Range, Output (F3)		450	—	900	MHz
Input Power		12	—	17	dBm
Conversion Loss		—	14	19	dB
Harmonic Ouput*	F1	-13	-1	—	dB
	F2	40	66	—	
	F4	40	67	—	

* Harmonics of input frequency below the power level of F3

Typical Performance Data

Frequency Input (MHz)	Frequency Output (MHz)	Conv. Loss (dB) F3	Harmonic Rejection Below F3, (-dBc) at RF Input Power 17 dBm F1	F2	F4
150.00	450.00	15.47	8.55	77.81	83.80
160.00	480.00	14.88	8.06	75.12	76.81
180.00	540.00	14.09	6.59	73.46	80.89
200.00	600.00	14.14	4.67	69.31	78.91
220.00	660.00	14.08	2.94	68.16	74.84
240.00	720.00	14.17	1.07	68.79	71.74
250.00	750.00	14.29	0.21	68.64	71.11
260.00	780.00	14.47	-0.72	66.50	69.28
280.00	840.00	14.78	-2.47	71.34	66.85
300.00	900.00	15.01	-4.15	75.10	63.85

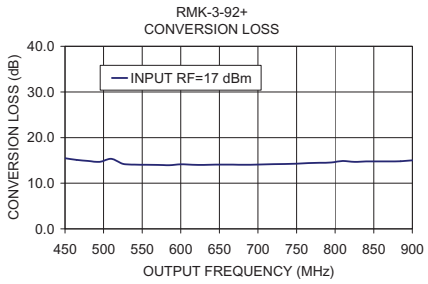

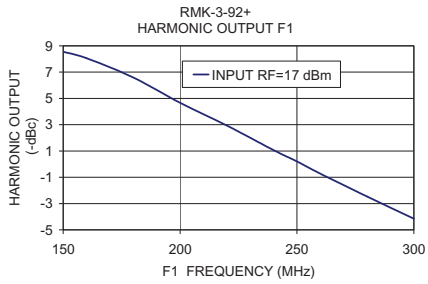

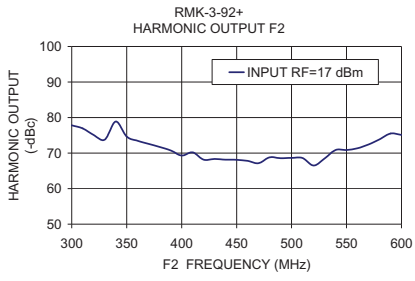

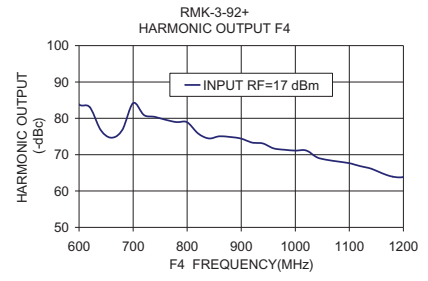

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- View RMK-3-92+ on WIN SOURCE
- Mini-Circuits Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- Global Sourcing Solution
- Obsolete Management
- Cost Control Management
- Shortage Management
- Alternative Solution
- Excess Inventory Management