THE DATASHEET OF

EMF5XV6T5

Power Management, Dual Transistors

NPN Silicon Surface Mount Transistors with Monolithic Bias Resistor Network

EMF5XV6T5



Features

- Simplifies Circuit Design
- Reduces Board Space
- Reduces Component Count
- These are Pb−Free Devices



SOT−563
CASE 463A
PLASTIC

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Q_1 (T_A = 25°C unless otherwise noted, common for Q_1 and Q_2)			
Collector-Base Voltage	V_{CBO}	50	Vdc
Collector-Emitter Voltage	V_{CEO}	50	Vdc
Collector Current	I_C	100	mAdc
Electrostatic Discharge	ESD	HBM Class 1 MM Class B	
Q_2 (T_A = 25°C)			
Collector-Emitter Voltage	V_{CEO}	−12	Vdc
Collector-Base Voltage	V_{CBO}	−15	Vdc
Emitter-Base Voltage	V_{EBO}	−6.0	Vdc
Collector Current − Peak − Continuous	I_C	−1.0 (Note 1) −0.5	Adc
Electrostatic Discharge	ESD	HBM Class 3B MM Class C	

THERMAL CHARACTERISTICS

Characteristic (One Junction Heated)	Symbol	Max	Unit
Total Device Dissipation T_A = 25°C Derate above 25°C	P_D	357 (Note 2) 2.9 (Note 2)	mW mW/°C
Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$	350 (Note 2)	°C/W
Characteristic (Both Junctions Heated)	**Symbol**	**Max**	**Unit**
Total Device Dissipation T_A = 25°C Derate above 25°C	P_D	500 (Note 2) 4.0 (Note 2)	mW mW/°C
Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$	250 (Note 2)	°C/W
Junction and Storage Temperature Range	T_J, T_{stg}	−55 to +150	°C

Maximum ratings are those values beyond which device damage can occur. Maximum ratings applied to the device are individual stress limit values (not normal operating conditions) and are not valid simultaneously. If these limits are exceeded, device functional operation is not implied, damage may occur and reliability may be affected.

1. Single pulse 1.0 ms.
2. FR−4 @ Minimum Pad.

MARKING DIAGRAM



UY = Specific Device Code
M = Date Code
▪ = Pb−Free Package
(Note: Microdot may be in either location)

ORDERING INFORMATION

Device	Package	Shipping†
EMF5XV6T5G	SOT−563 (Pb−Free)	8000/Tape & Reel
EMF5XV6T1G	SOT−563 (Pb−Free)	4000/Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

© Semiconductor Components Industries, LLC, 2005

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted, common for Q_1 and Q_2)

Characteristic		Symbol	Min	Typ	Max	Unit
Q_1 OFF CHARACTERISTICS						
Collector-Base Cutoff Current	(V_{CB} = 50 V, I_E = 0)	I_{CBO}	–	–	100	nAdc
Collector-Emitter Cutoff Current	(V_{CE} = 50 V, I_B = 0)	I_{CEO}	–	–	500	nAdc
Emitter-Base Cutoff Current	(V_{EB} = 6.0 V, I_C = 0)	I_{EBO}	–	–	0.1	mAdc
Collector-Base Breakdown Voltage	(I_C = 10 μA, I_E = 0)	$V_{(BR)CBO}$	50	–	–	Vdc
Collector-Emitter Breakdown Voltage (Note 3)	(I_C = 2.0 mA, I_B = 0)	$V_{(BR)CEO}$	50	–	–	Vdc
ON CHARACTERISTICS (Note 3)						
DC Current Gain	(V_{CE} = 10 V, I_C = 5.0 mA)	h_{FE}	80	140	–	
Collector-Emitter Saturation Voltage	(I_C = 10 mA, I_B = 0.3 mA)	$V_{CE(sat)}$	–	–	0.25	Vdc
Output Voltage (on)	(V_{CC} = 5.0 V, V_B = 3.5 V, R_L = 1.0 kΩ)	V_{OL}	–	–	0.2	Vdc
Output Voltage (off)	(V_{CC} = 5.0 V, V_B = 0.5 V, R_L = 1.0 kΩ)	V_{OH}	4.9	–	–	Vdc
Input Resistor		R1	32.9	47	61.1	k Ω
Resistor Ratio		R1/R2	0.8	1.0	1.2	
Q_2 OFF CHARACTERISTICS						
Collector – Emitter Breakdown Voltage	(I_C = −10 mAdc, I_B = 0)	$V_{(BR)CEO}$	−12	–	–	Vdc
Collector – Base Breakdown Voltage	(I_C = −0.1 mAdc, I_E = 0)	$V_{(BR)CBO}$	−15	–	–	Vdc
Emitter – Base Breakdown Voltage	(I_E = −0.1 mAdc, I_C = 0)	$V_{(BR)EBO}$	−6.0	–	–	Vdc
Collector Cutoff Current	(V_{CB} = −15 Vdc, I_E = 0)	I_{CBO}	–	–	−0.1	μAdc
Emitter Cutoff Current	(V_{EB} = −6.0 Vdc)	I_{EBO}	–	–	−0.1	μAdc
ON CHARACTERISTICS						
DC Current Gain (Note 4)	(I_C = −10 mA, V_{CE} = −2.0 V)	h_{FE}	270	–	680	
Collector – Emitter Saturation Voltage (Note 4)	(I_C = −200 mA, I_B = −10 mA)	$V_{CE(sat)}$	–	–	−250	mV
Base – Emitter Saturation Voltage (Note 4)	(I_C = −150 mA, I_B = −20 mA)	$V_{BE(sat)}$	–	−0.81	−0.90	V
Base – Emitter Turn−on Voltage (Note 4)	(I_C = −150 mA, V_{CE} = −3.0 V)	$V_{BE(on)}$	–	−0.81	−0.875	V
Input Capacitance	(V_{EB} = 0 V, f = 1.0 MHz)	C_{ibo}	–	52	–	pF
Output Capacitance	(V_{CB} = 0 V, f = 1.0 MHz)	C_{obo}	–	30	–	pF
Turn−On Time	(I_{BI} = −50 mA, I_C = −500 mA, R_L = 3.0 Ω)	t_{on}	–	50	–	ns
Turn−Off Time	(I_{B1} = I_{B2} = −50 mA, I_C = −500 mA, R_L = 3.0 Ω)	t_{off}	–	80	–	ns

3. Pulse Test: Pulse Width < 300 μs, Duty Cycle < 2.0%.
4. Pulsed Condition: Pulse Width = 300 μsec, Duty Cycle ≤ 2%.

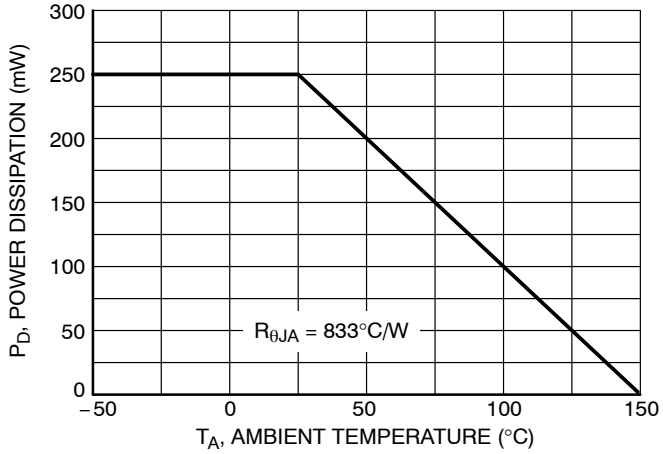

Figure 1. Derating Curve

TYPICAL ELECTRICAL CHARACTERISTICS FOR Q1

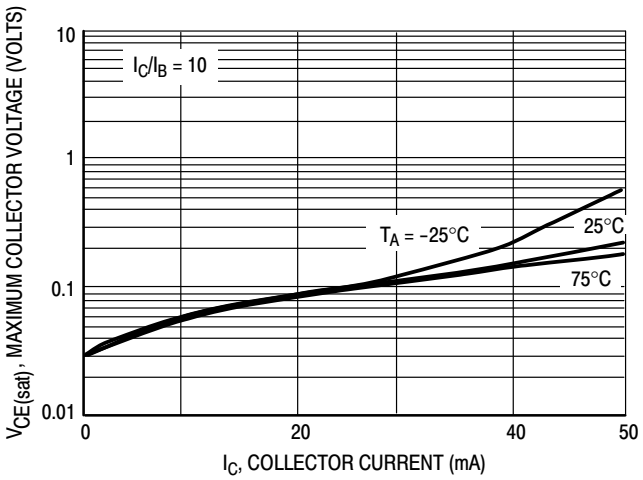

Figure 2. $V_{CE(sat)}$ versus I_C

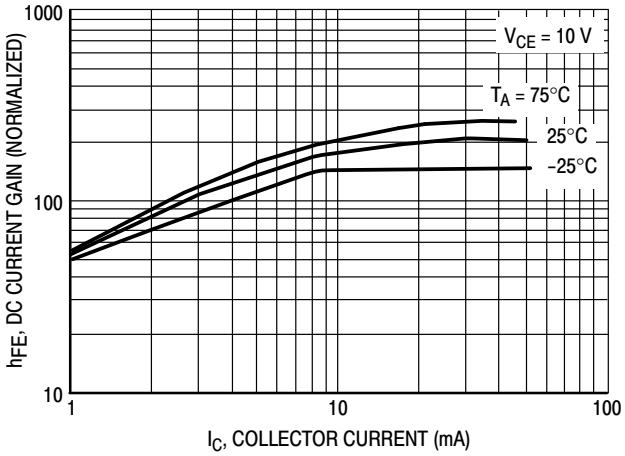

Figure 3. DC Current Gain

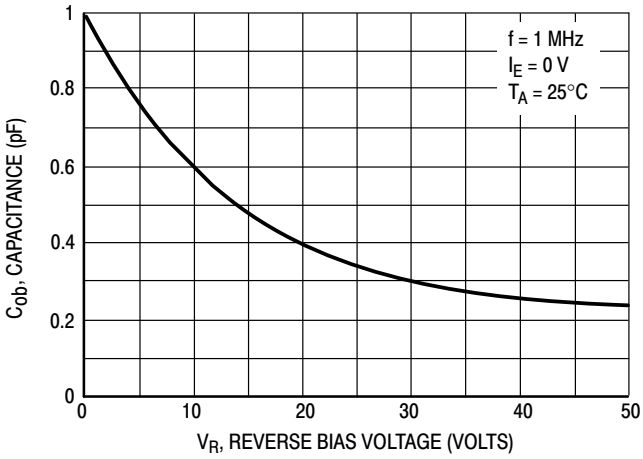

Figure 4. Output Capacitance

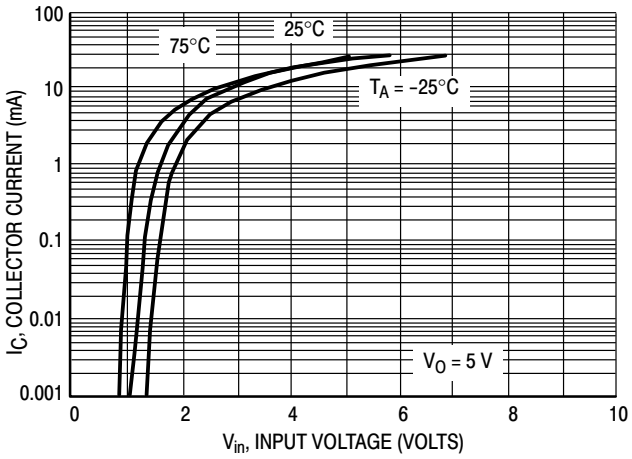

Figure 5. Output Current versus Input Voltage

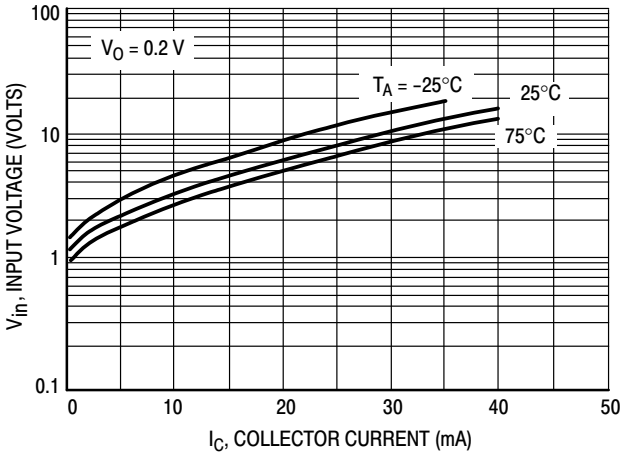

Figure 6. Input Voltage versus Output Current

TYPICAL ELECTRICAL CHARACTERISTICS FOR Q2

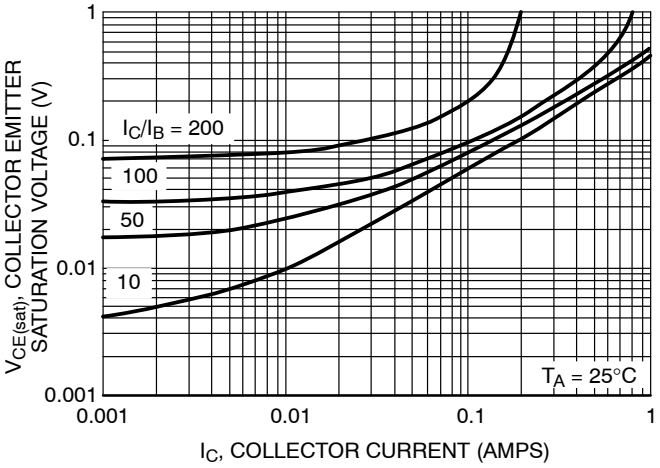

Figure 7. Collector Emitter Saturation Voltage vs. Collector Current

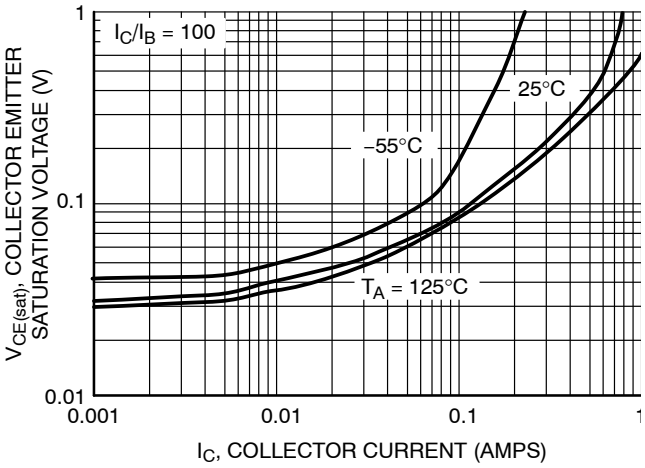

Figure 8. Collector Emitter Saturation Voltage vs. Collector Current

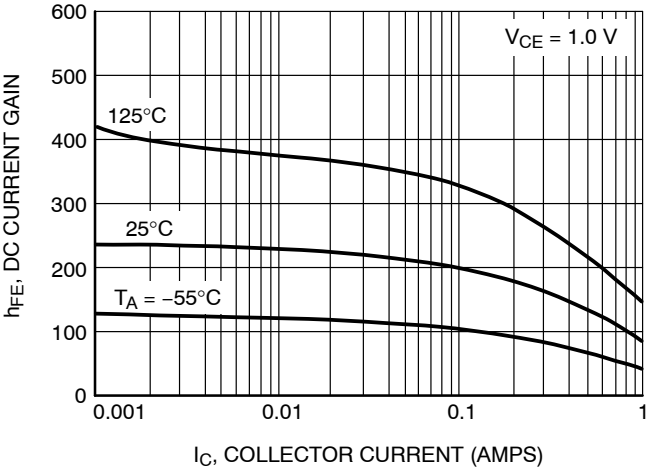

Figure 9. DC Current Gain

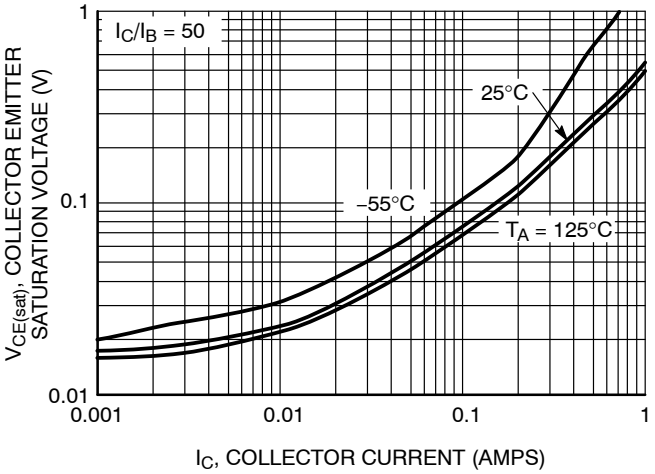

Figure 10. Collector Emitter Saturation Voltage vs. Collector Current

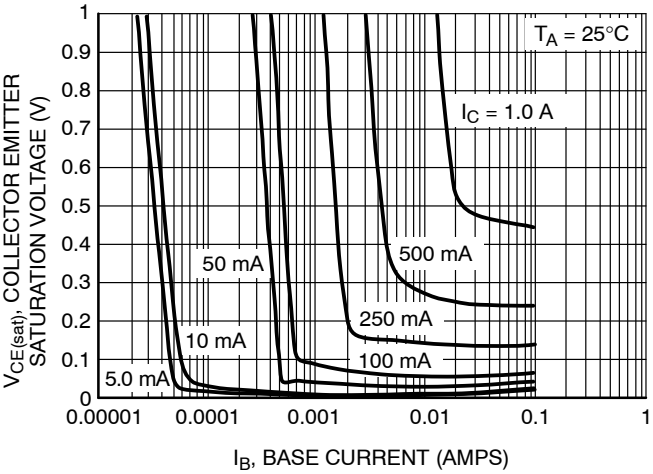

Figure 11. Collector Emitter Saturation Voltage vs Base Current

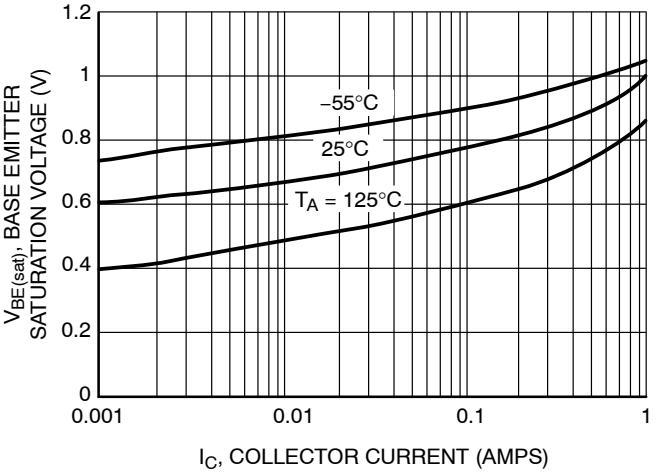

Figure 12. Base Emitter Saturation Voltage vs. Collector Current

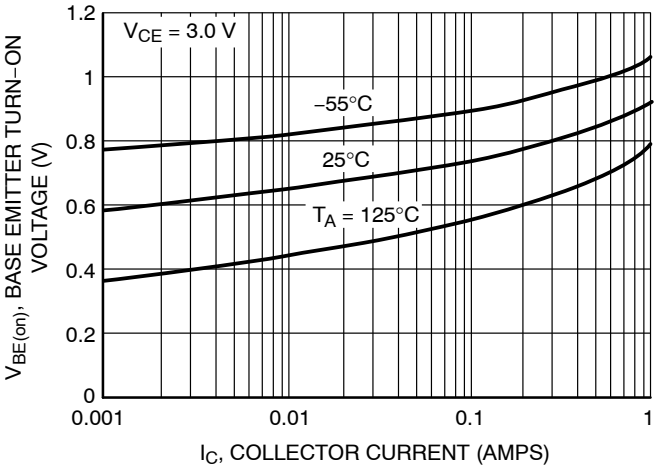

Figure 13. Base Emitter Turn−On Voltage vs. Collector Current

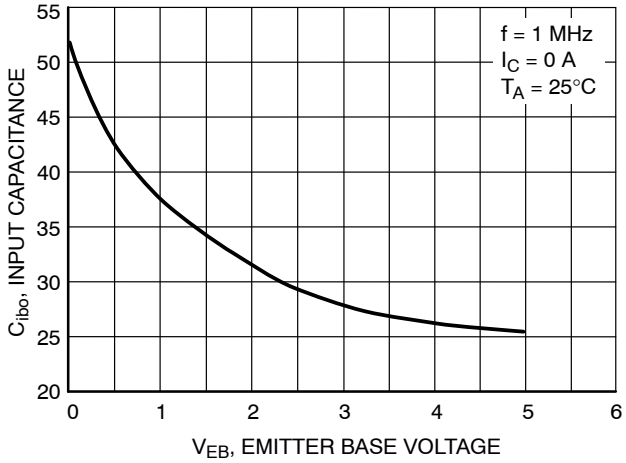

Figure 14. Input Capacitance

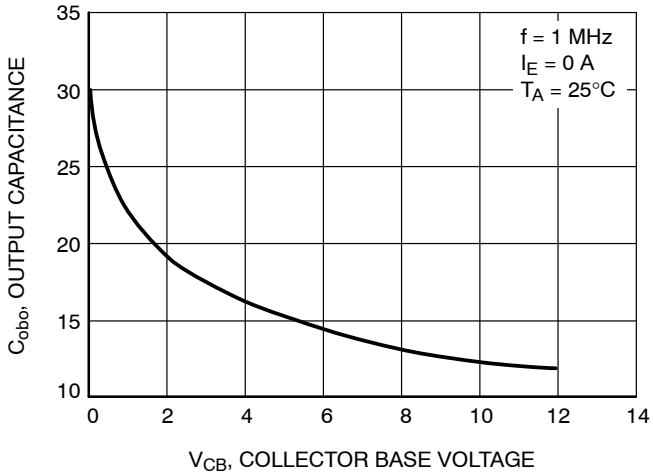

Figure 15. Output Capacitance

MECHANICAL CASE OUTLINE
PACKAGE DIMENSIONS



SOT−563−6 1.60x1.20x0.55, 0.50P
CASE 463A
ISSUE J

DATE 15 FEB 2024

NOTES:
1. DIMENSIONING AND TOLERANCING CONFORM TO ASME Y14.5−2018.
2. ALL DIMENSION ARE IN MILLIMETERS.
3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.

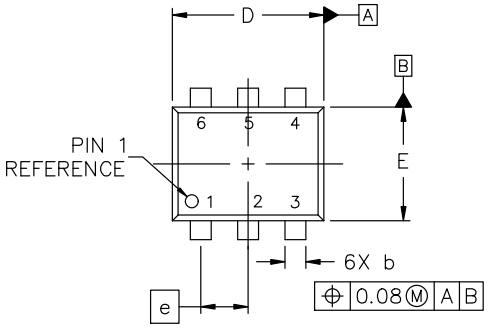

TOP VIEW



SIDE VIEW

DIM	MILLIMETERS		
	MIN.	NOM.	MAX.
A	0.50	0.55	0.60
b	0.17	0.22	0.27
c	0.08	0.13	0.18
D	1.50	1.60	1.70
E	1.10	1.20	1.30
e	0.50 BSC		
H	1.50	1.60	1.70
L	0.10	0.20	0.30

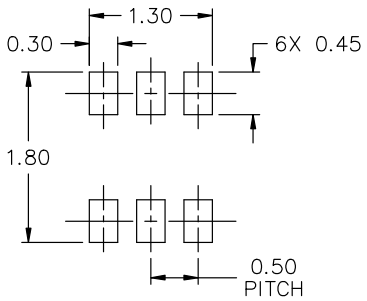

RECOMMENDED MOUNTING FOOTPRINT*

* FOR ADDITIONAL INFORMATION ON OUR Pb−FREE STRATEGY AND SOLDERING DETAILS, PLEASE DOWNLOAD THE ON SEMICONDUCTOR SOLDERING AND MOUNTING TECHNIQUES REFERENCE MANUAL, SOLDERRM/D.

STYLE 1:
PIN 1. EMITTER 1
2. BASE 1
3. COLLECTOR 2
4. EMITTER 2
5. BASE 2
6. COLLECTOR 1

STYLE 2:
PIN 1. EMITTER 1
2. EMITTER 2
3. BASE 2
4. COLLECTOR 2
5. BASE 1
6. COLLECTOR 1

STYLE 3:
PIN 1. CATHODE 1
2. CATHODE 1
3. ANODE/ANODE 2
4. CATHODE 2
5. CATHODE 2
6. ANODE/ANODE 1

STYLE 4:
PIN 1. COLLECTOR
2. COLLECTOR
3. BASE
4. EMITTER
5. COLLECTOR
6. COLLECTOR

STYLE 5:
PIN 1. CATHODE
2. CATHODE
3. ANODE
4. ANODE
5. CATHODE
6. CATHODE

STYLE 6:
PIN 1. CATHODE
2. ANODE
3. CATHODE
4. CATHODE
5. CATHODE
6. CATHODE

STYLE 7:
PIN 1. CATHODE
2. ANODE
3. CATHODE
4. CATHODE
5. ANODE
6. CATHODE

STYLE 8:
PIN 1. DRAIN
2. DRAIN
3. GATE
4. SOURCE
5. DRAIN
6. DRAIN

STYLE 9:
PIN 1. SOURCE 1
2. GATE 1
3. DRAIN 2
4. SOURCE 2
5. GATE 2
6. DRAIN 1

STYLE 10:
PIN 1. CATHODE 1
2. N/C
3. CATHODE 2
4. ANODE 2
5. N/C
6. ANODE 1

STYLE 11:
PIN 1. EMITTER 2
2. BASE 2
3. COLLECTOR 1
4. EMITTER 1
5. BASE 1
6. COLLECTOR 2

GENERIC MARKING DIAGRAM*



XX = Specific Device Code
M = Month Code
▪ = Pb−Free Package

*This information is generic. Please refer to device data sheet for actual part marking. Pb−Free indicator, “G” or microdot “▪”, may or may not be present. Some products may not follow the Generic Marking.

DOCUMENT NUMBER:	98AON11126D	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped “CONTROLLED COPY” in red.
DESCRIPTION:	SOT−563−6 1.60x1.20x0.55, 0.50P	PAGE 1 OF 1

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

© Semiconductor Components Industries, LLC, 2019

onsemi, , and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent−Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as−is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:
Technical Library: www.onsemi.com/design/resources/technical−documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support
For additional information, please contact your local Sales Representative at www.onsemi.com/support/sales

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- View EMF5XV6T5 on WIN SOURCE
- ON Semiconductor Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- Global Sourcing Solution
- Obsolete Management
- Cost Control Management
- Shortage Management
- Alternative Solution
- Excess Inventory Management