

To _____

No. ZCDM-040403M-01

Date 3rd Apr. '04

Type No.
CRDA1

Data Sheet

GSM850/CDMA800 Rx SAW Filter	
Application	: Rx Filter for GSM850/CDMA800
Center Frequency	: 881.5MHz
Size	: 2.0x1.4mm, 5pin-layout
Impedance	: 50-50ohms unbalance-unbalance
Part No.	: EFCH881MTCD1

Issued A. Tsunekawa
Check K. Nishimura

CIRCUIT COMPONENTS BUSINESS UNIT
MATSUSHITA ELECTRONIC COMPONENTS CO.,LTD
KADOMA, OSAKA, JAPAN

GSM850/CDMA800 Rx SAW Filter

----- Unbalanced input and unbalanced output -----

Part No. :


Design No. : T881A22

Parameter	Frequency	Your request			Our Specification			Unit
		Min.	Typ.	Max.	Min.	Typ.	Max.	
Passband		869 ... 894			869 ... 894			MHz
Insertion loss	869 ... 894MHz					1.6	2.0	dB
Ripple in passband	869 ... 894MHz					0.4	1.0	dB
Attenuation	Att1	DC ... 820MHz				45	58	dB
	Att2	820 ... 849MHz				35	40	dB
	Att3	914 ... 1000MHz				26	30	dB
	Att4	1000 ... 4000MHz				35	46	dB
	Att5	4000 ... 6000MHz				15	27	dB
VSWR	Input	869 ... 894MHz				1.6	2.0	
	Output	869 ... 894MHz				1.6	2.0	
Input impedance (Single Ended)					50			Ohm
Output impedance(Single Ended)					50			Ohm
Maximum drive level							15	dBm
Maximum DC voltage							5	V
ESD							50	V
Operating temperature					-30		+85	deg. C
Storage temperature					-40		+85	deg. C



2003.10.14

GSM850/CDMA800 Rx SAW Filter

----- Unbalanced input and unbalanced output -----

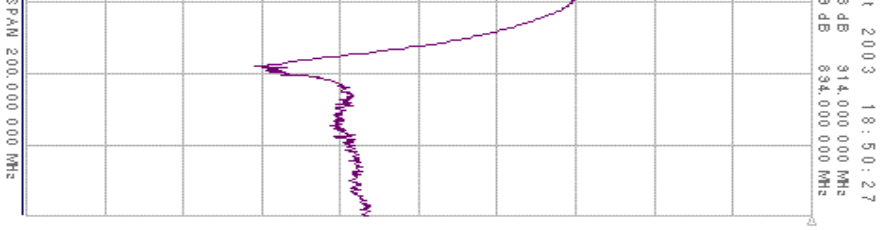

UNLESS OTHERWISE SPECIFIED	
BASIC DIMENSIONS	TOLERANCE
UP TO	INCL
TO	INCL
TO	INCL
TO	INCL
ABOVE	

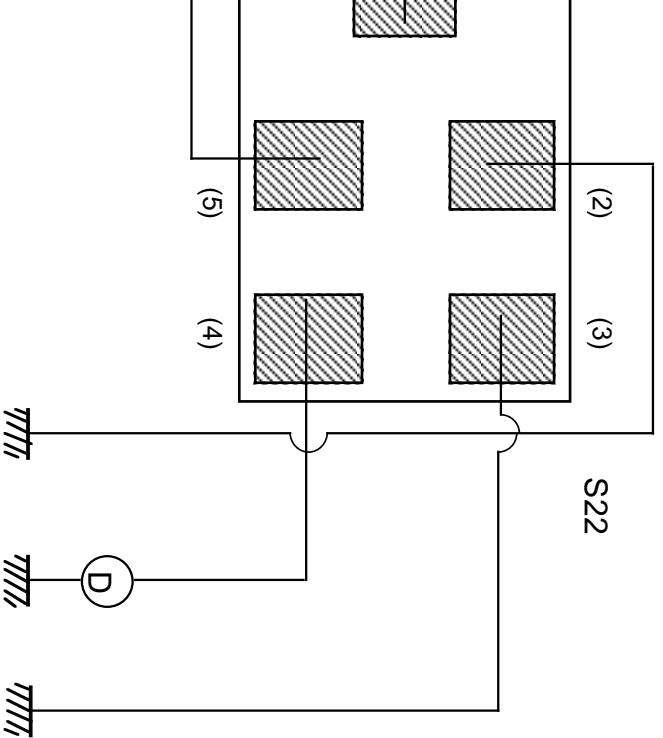

S : Standard Signal Generator
 (Output Impedance 50 ohm)
 C : Frequency Counter
 D : Detector
 (Input Impedance 50 ohm)


ISSUE	REVISIONS	DATE
MATERIAL	FINISH	SCALE
DESIGN		
DRAW		
CHECK		
APPROVAL		
DRAWING NO.		

NAME	TYPE NO.
SAW filter	

CERAMIC BUSINESS UNIT , LCR DEVICE COMPANY
 MATSUSHITA ELECTRONIC COMPONENTS CO.,LTD.
 KADOMA, OSAKA, JAPAN

Fig. 2

UNLESS OTHERWISE SPECIFIED	
BASIC DIMENSIONS	TOLERANCE
UP TO INCL	
TO INCL	
TO INCL	
TO INCL	
ABOVE	

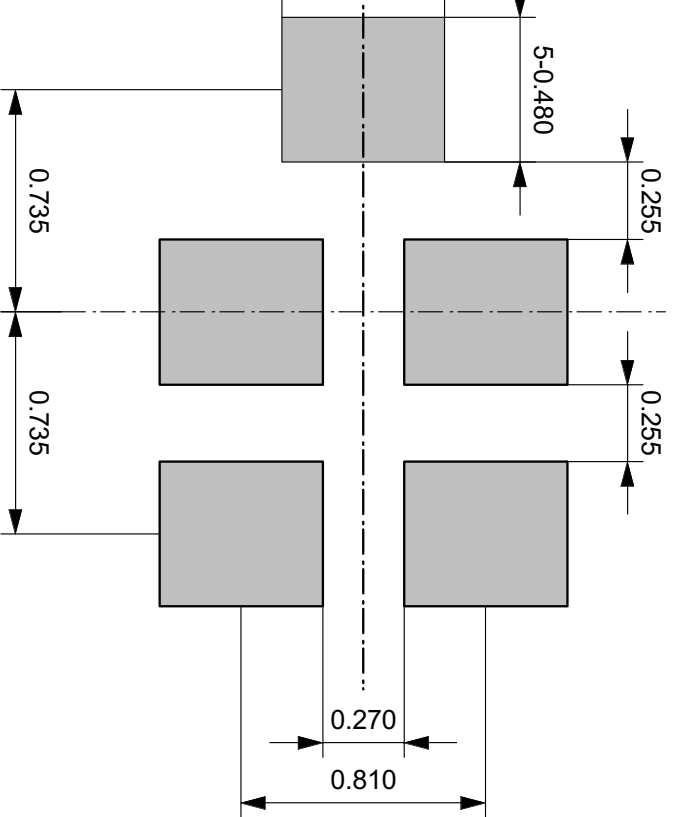

ISSUE	REVISIONS		SCALE	DATE
	MATERIAL	FINISH		
DESIGN				
DRAW				
CHECK				
APPROVAL				
DRAWING NO.				

Note :

The design manufacturing process, and Specification of this device are subject to change without notice.

NAME SAW Filter

TYPE NO.

CERAMIC BUSINESS UNIT, ICR DEVICE COMPANY
MATSUSHITA ELECTRONIC COMPONENTS CO.,LTD.
KADOMA, OSAKA, JAPAN

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View EFCH881MTCD1](#) on WIN SOURCE

 [Panasonic](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management