




**THE DATASHEET OF  
NPJ50AT6G40W-6DB**



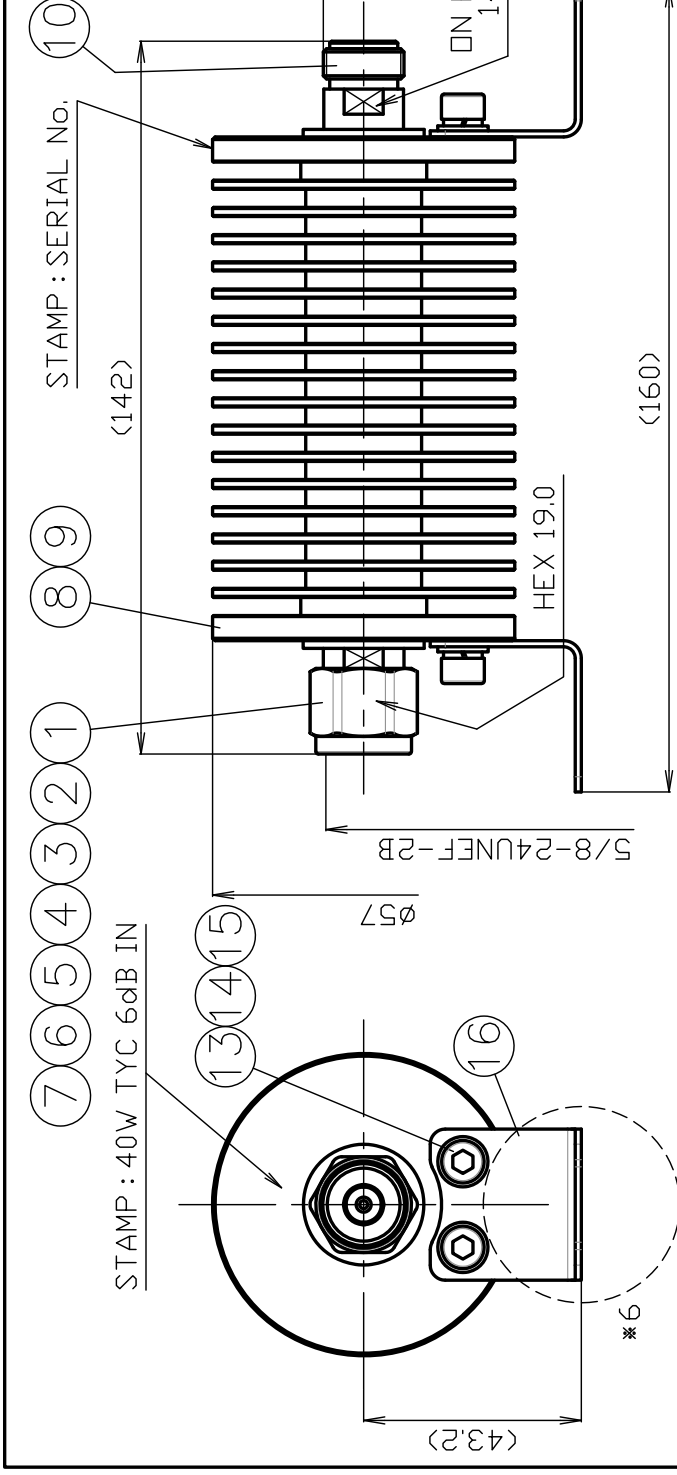

- \* 1: TERNARY PLATING
- \* 2: ANODAIZING(BLACK)
- \* 3: PASSIVATE
- \* 4: STAINLESS STEEL
- \* 5: PHOSPHOR BRONZE

12	INSULATOR B	PTFE	1	--	16	BRACKET	* 4
11	CENTER PIN B	* 5	1	Au	15	WASHER	* 4
10	BODY B	BRASS	1	* 1	14	SPRING WASHER	* 4
9	ATTENUATION TERMINAL	--	1	--	13	SOCKET HEAD CAP SCREW	* 4
8	HEAT SINK	ALUMINUM	1	* 2	ND.	DESCRIPTION	MATERIAL
7	O-RING	SILICONE	2	--	SCALE	2/3	INSPECTED
6	INSULATOR A	PTFE	1	--			井
5	CENTER PIN A	* 5	1	Au			'23.12.18
4	GASKET	SILICONE	1	--			檜
3	BODY A	BRASS	1	* 1			'23.12.18
2	HOLDING RING	* 4	1	--			出
1	COUPLING NUT	BRASS	1	* 1			澤
ND.	DESCRIPTION	MATERIAL	Q'TY	FINISH	DATE	2023.12.18	PROJECTION
					UNIT	mm	
					REMARK		



株式会社  
70-

# PRODUCT SPECIFICATIONS

Part No. NPJ50AT6G40W-6dB

No. 0592477

DWG No. W-0596212

Nominal 1 Standard JIS C 5411  
 2 Power handling 40W  
 3 Frequency range 6GHz  
 4 Impedance 50Ω  
 5 [OPR]Temp-Range -45°C~+85°C



		Test Items	Procedures/Test method	Requirements
DESIGN	1	Design & construction	Specified on relevant product drawing	No defects or abnormalities
	2	Materials	(DWG No. W-0596212)	
	3	Finishes		
ELECTRICAL	4	Attenuation	DC~6GHz	6±0.68dB
	5	V. S. W. R	DC~3GHz 3~6GHz	1.2 (Max.) 1.3 (Max.)
	6	Compatibility	Connecting with a standard-compliant connector	No defects or abnormalities
MECHANICAL	7	Tensile strength of coupling mechanism	At axial tensile force 300N	No defects or abnormalities
	8	Connection nut tightening torque	0.9~1.7N·m	
	9	Waterproof	IPX7	No water ingress inside the connector

	Remarks	Date
1		
2		
3		

Checked	Approved	Inspected	Prepared
三 23.01.12 村	山 23.01.12 本	檜 23.01.12 澤	渡邊 '23,01,12 直弘

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View NPJ50AT6G40W-6dB on WIN SOURCE](#)
- ⊖ [TYCLON Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management