



**THE DATASHEET OF  
VJ1812Y104JBEAT4X**



## Surface Mount Multilayer Ceramic Chip Capacitor for Flex Sensitive Applications



### FEATURES

- Open Mode Design (OMD) reduces risk of shorts or leakage in board flex applications
- Excellent reliability and thermal shock performance
- Efficient low-power consumption, ripple current capable to 1.2 A<sub>RMS</sub> at 100 kHz
- High voltage breakdown compared to standard design
- 100 % voltage conditioning available up to 630 V<sub>DC</sub> rating (process code "5H")  
Contact [mlcc@vishay.com](mailto:mlcc@vishay.com) for higher voltages
- Polymer termination available for intensive board flex requirements
- Wet build process
- Reliable Noble Metal Electrode (NME) system
- Material categorization: for definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)



**RoHS**  
COMPLIANT  
HALOGEN  
**FREE**  
**GREEN**  
(5-2008)  
Available

### LINKS TO ADDITIONAL RESOURCES



Packages



Technical Notes



Related Documents

### APPLICATIONS

- Demanding boardflex applications
- Input filter capacitors
- Output filter capacitors
- Snubber capacitors reduce MOSFET voltage spikes
- Filtering for switching power supplies
- For lighting and other AC applications please contact: [mlcc@vishay.com](mailto:mlcc@vishay.com)

### ELECTRICAL SPECIFICATIONS

| COG (NP0)   |                        |
|---|------------------------|
| <b>GENERAL SPECIFICATION</b>  |                        |
| <b>Note</b><br>Electrical characteristics at +25 °C unless otherwise specified  |                        |
| <b>Operating Temperature:</b> -55 °C to +125 °C   |                        |
| <b>Capacitance Range:</b> 10 pF to 47 nF  |                        |
| <b>Voltage Range:</b> 50 V <sub>DC</sub> to 3000 V <sub>DC</sub>  |                        |
| <b>Temperature Coefficient of Capacitance (TCC):</b><br>0 ppm/°C ± 30 ppm/°C from -55 °C to +125 °C   |                        |
| <b>Dissipation Factor (DF):</b><br>0.1 % maximum at 1.0 V <sub>RMS</sub> and 1 MHz for values ≤ 1000 pF<br>0.1 % maximum at 1.0 V <sub>RMS</sub> and 1 kHz for values > 1000 pF |                        |
| <b>Insulating Resistance:</b><br>at +25 °C 100 000 MΩ min. or 1000 ΩF whichever is less<br>at +125 °C 10 000 MΩ min. or 100 ΩF whichever is less                                |                        |
| <b>Aging Rate:</b> 0 % maximum per decade   |                        |
| <b>Dielectric Strength Test:</b><br>performed per method 103 of EIA 198-2-E<br>Applied test voltages  |                        |
| ≤ 200 V <sub>DC</sub> -rated:   | 250 % of rated voltage |
| 500 V <sub>DC</sub> -rated:   | 200 % of rated voltage |
| 630 V <sub>DC</sub> / 1000 V <sub>DC</sub> -rated:  | 150 % of rated voltage |
| 1500 V <sub>DC</sub> to 3000 V <sub>DC</sub> -rated:  | 120 % of rated voltage |

| X7R   |                             |
|---|-----------------------------|
| <b>GENERAL SPECIFICATION</b>  |                             |
| <b>Note</b><br>Electrical characteristics at +25 °C unless otherwise specified  |                             |
| <b>Operating Temperature:</b> -55 °C to +125 °C   |                             |
| <b>Capacitance Range:</b> 100 pF to 1.8 μF  |                             |
| <b>Voltage Range:</b> 16 V <sub>DC</sub> to 3000 V <sub>DC</sub>  |                             |
| <b>Temperature Coefficient of Capacitance (TCC):</b><br>± 15 % from -55 °C to +125 °C, with 0 V <sub>DC</sub> applied   |                             |
| <b>Dissipation Factor (DF):</b><br>< 50 V ratings 3.5 % maximum at 1.0 V <sub>RMS</sub> and 1 kHz<br>≥ 50 V ratings 2.5 % maximum at 1.0 V <sub>RMS</sub> and 1 kHz |                             |
| <b>Insulating Resistance:</b><br>at +25 °C 100 000 MΩ min. or 1000 ΩF whichever is less<br>at +125 °C 10 000 MΩ min. or 100 ΩF whichever is less                    |                             |
| <b>Aging Rate:</b> 1 % maximum per decade   |                             |
| <b>Dielectric Strength Test:</b><br>performed per method 103 of EIA 198-2-E<br>Applied test voltages  |                             |
| ≤ 250 V <sub>DC</sub> -rated:   | 250 % of rated voltage      |
| 500 V <sub>DC</sub> -rated:   | min. 150 % of rated voltage |
| 630 V <sub>DC</sub> / 1000 V <sub>DC</sub> -rated:  | 150 % of rated voltage      |
| 1500 V <sub>DC</sub> to 3000 V <sub>DC</sub> -rated:  | 120 % of rated voltage      |



| QUICK REFERENCE DATA |      |                     |             |         |
|----------------------|------|---------------------|-------------|---------|
| DIELECTRIC           | CASE | MAXIMUM VOLTAGE (V) | CAPACITANCE |         |
|                      |      |                     | MINIMUM     | MAXIMUM |
| COG (NP0)            | 1206 | 1500                | 10 pF       | 4.7 nF  |
|                      | 1210 | 2000                | 10 pF       | 8.2 nF  |
|                      | 1808 | 3000                | 27 pF       | 8.2 nF  |
|                      | 1812 | 3000                | 27 pF       | 18 nF   |
|                      | 1825 | 1000                | 15 pF       | 33 nF   |
|                      | 2220 | 1000                | 270 pF      | 39 nF   |
|                      | 2225 | 1000                | 270 pF      | 47 nF   |
| X7R                  | 0805 | 630                 | 470 pF      | 220 nF  |
|                      | 1206 | 2000                | 270 pF      | 680 nF  |
|                      | 1210 | 2000                | 390 pF      | 1.0 μF  |
|                      | 1808 | 3000                | 220 pF      | 18 nF   |
|                      | 1812 | 3000                | 100 pF      | 1.2 μF  |
|                      | 1825 | 2000                | 5.6 nF      | 1.5 μF  |
|                      | 2220 | 3000                | 1.0 nF      | 1.8 μF  |
| 2225                 | 2000 | 5.6 nF              | 1.8 μF      |         |

**Note**

- Detail ratings see “Selection Chart”


| ORDERING INFORMATION   |                          |   |   |   |   |              |  |  |
|--|--------------------------|---|---|---|---|--------------|--|--|
| VJ1210   | Y                        | 474   | J   | X   | A   | A            | T  | # (2)  |
| CASE CODE  | DIELECTRIC               | CAPACITANCE NOMINAL CODE  | CAPACITANCE TOLERANCE   | TERMINATION (4)   | DC VOLTAGE RATING (1)   | MARKING      | PACKAGING  | PROCESS CODE   |
| 0805<br>1206<br>1210<br>1808<br>1812<br>1825<br>2220<br>2225 | A = COG (NP0)<br>Y = X7R | Expressed in picofarads (pF). The first two digits are significant, the third is a multiplier. An “R” indicates a decimal point.<br><b>Examples</b><br>474 = 470 000 pF | F = ± 1 %<br>G = ± 2 %<br>J = ± 5 %<br>K = ± 10 %<br>M = ± 20 %<br><b>Note</b><br>COG (NP0):<br>F, G, J, K<br>X7R:<br>J, K, M | X = Ni barrier<br>100 % tin plated matte finish<br>E = AgPd (3)<br>B = polymer<br>100 % tin plated matte finish (5) | J = 16 V<br>X = 25 V<br>A = 50 V<br>B = 100 V<br>C = 200 V<br>P = 250 V<br>E = 500 V<br>L = 630 V<br>G = 1000 V<br>R = 1500 V<br>F = 2000 V<br>H = 3000 V | A = unmarked | C = 7" reel / paper tape<br>T = 7" reel / plastic tape<br>P = 11 1/4" / 13" reel / paper tape<br>R = 11 1/4" / 13" reel / plastic tape<br>O = 7" reel / flamed paper tape<br>I = 11 1/4" / 13" reel / flamed paper tape<br><b>Note</b><br>“I” and “O” are used for “E” termination size 0805 | 4X = OMD cap<br>5H = OMD cap<br>100 % voltage conditioning |

**Notes**

- (1) DC voltage rating should not be exceeded in application. Other application factors may affect the MLCC performance. Consult for questions: [mlcc@vishay.com](mailto:mlcc@vishay.com)
- (2) Process code with 2 digits has to be added
- (3) Termination code “E” is for conductive epoxy assembly
- (4) Other termination options contact [mlcc@vishay.com](mailto:mlcc@vishay.com) for availability
- (5) Polymer termination, code “B”, only available in plastic tape “T” / “R”

| ENVIRONMENTAL STATUS |  |                |              |
|----------------------|--|----------------|--------------|
| TERMINATION CODE     | TERMINATION DESCRIPTION                      | RoHS COMPLIANT | VISHAY GREEN |
| X                    | Ni barrier 100 % tin plated matte finish     | Yes            | Yes          |
| E                    | AgPd   | Yes            | Yes          |
| B                    | Polymer layer, 100 % tin plated matte finish | Yes            | No           |

### DIMENSIONS in inches (millimeters)

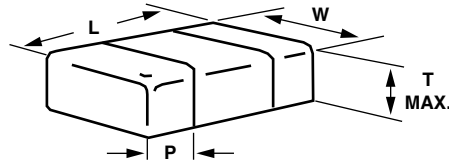

| CASE CODE | STYLE  | LENGTH (L)                     | WIDTH (W)                      | MAXIMUM THICKNESS (T)       | TERMINATION PAD (P) |              |
|-----------|--------|--------------------------------|--------------------------------|-----------------------------|---------------------|--------------|
|           |        |                                |                                |                             | MINIMUM             | MAXIMUM      |
| 0805      | VJ0805 | 0.079 ± 0.008<br>(2.00 ± 0.20) | 0.049 ± 0.008<br>(1.25 ± 0.20) | 0.057 (1.45)                | 0.010 (0.25)        | 0.030 (0.76) |
| 1206      | VJ1206 | 0.126 ± 0.010<br>(3.20 ± 0.25) | 0.063 ± 0.010<br>(1.60 ± 0.25) | 0.067 (1.70) <sup>(1)</sup> | 0.010 (0.25)        | 0.030 (0.76) |
| 1210      | VJ1210 | 0.126 ± 0.010<br>(3.20 ± 0.25) | 0.098 ± 0.010<br>(2.50 ± 0.25) | 0.067 (1.70)                | 0.010 (0.25)        | 0.030 (0.76) |
| 1808      | VJ1808 | 0.180 ± 0.012<br>(4.57 ± 0.30) | 0.080 ± 0.010<br>(2.03 ± 0.25) | 0.106 (2.70)                | 0.010 (0.25)        | 0.035 (0.90) |
| 1812      | VJ1812 | 0.177 ± 0.012<br>(4.50 ± 0.30) | 0.126 ± 0.008<br>(3.20 ± 0.20) | 0.106 (2.70)                | 0.010 (0.25)        | 0.035 (0.90) |
| 1825      | VJ1825 | 0.177 ± 0.012<br>(4.50 ± 0.30) | 0.252 ± 0.010<br>(6.40 ± 0.25) | 0.106 (2.70)                | 0.010 (0.25)        | 0.035 (0.90) |
| 2220      | VJ2220 | 0.220 ± 0.010<br>(5.59 ± 0.25) | 0.200 ± 0.010<br>(5.08 ± 0.25) | 0.106 (2.70)                | 0.010 (0.25)        | 0.037 (0.95) |
| 2225      | VJ2225 | 0.220 ± 0.010<br>(5.59 ± 0.25) | 0.250 ± 0.010<br>(6.35 ± 0.25) | 0.106 (2.70)                | 0.010 (0.25)        | 0.037 (0.95) |

#### Notes

- Polymer (B-termination) have increased dimensions:  
length 0.006" (0.15 mm)
- <sup>(1)</sup> Maximum thickness (T) = 0.067 (1.71) for VJ1206Y104\*



| SELECTION CHART            |        |                       |     |     |     |     |      |                       |    |     |     |     |     |                       |      |      |    |     |     |     |     |      |      |      |      |
|----------------------------|--------|-----------------------|-----|-----|-----|-----|------|-----------------------|----|-----|-----|-----|-----|-----------------------|------|------|----|-----|-----|-----|-----|------|------|------|------|
| DIELECTRIC                 |        | COG (NP0)             |     |     |     |     |      |                       |    |     |     |     |     |                       |      |      |    |     |     |     |     |      |      |      |      |
| STYLE                      |        | VJ1206 <sup>(1)</sup> |     |     |     |     |      | VJ1210 <sup>(1)</sup> |    |     |     |     |     | VJ1808 <sup>(1)</sup> |      |      |    |     |     |     |     |      |      |      |      |
| CASE CODE                  |        | 1206                  |     |     |     |     |      | 1210                  |    |     |     |     |     | 1808                  |      |      |    |     |     |     |     |      |      |      |      |
| VOLTAGE (V <sub>DC</sub> ) |        | 50                    | 100 | 200 | 500 | 630 | 1000 | 1500                  | 50 | 100 | 200 | 500 | 630 | 1000                  | 1500 | 2000 | 50 | 100 | 200 | 500 | 630 | 1000 | 1500 | 2000 | 3000 |
| VOLTAGE CODE               |        | A                     | B   | C   | E   | L   | G    | R                     | A  | B   | C   | E   | L   | G                     | R    | F    | A  | B   | C   | E   | L   | G    | R    | F    | H    |
| CAP. CODE                  | CAP.   |                       |     |     |     |     |      |                       |    |     |     |     |     |                       |      |      |    |     |     |     |     |      |      |      |      |
| 100                        | 10 pF  | •                     | •   | •   | •   | •   | •    | •                     | •  | •   | •   | •   | •   | •                     | •    | •    |    |     |     |     |     |      |      |      |      |
| 120                        | 12 pF  | •                     | •   | •   | •   | •   | •    | •                     | •  | •   | •   | •   | •   | •                     | •    | •    |    |     |     |     |     |      |      |      |      |
| 150                        | 15 pF  | •                     | •   | •   | •   | •   | •    | •                     | •  | •   | •   | •   | •   | •                     | •    | •    |    |     |     |     |     |      |      |      |      |
| 180                        | 18 pF  | •                     | •   | •   | •   | •   | •    | •                     | •  | •   | •   | •   | •   | •                     | •    | •    |    |     |     |     |     |      |      |      |      |
| 220                        | 22 pF  | •                     | •   | •   | •   | •   | •    | •                     | •  | •   | •   | •   | •   | •                     | •    | •    |    |     |     |     |     |      |      |      |      |
| 270                        | 27 pF  | •                     | •   | •   | •   | •   | •    | •                     | •  | •   | •   | •   | •   | •                     | •    | •    | •  | •   | •   | •   | •   | •    | •    | •    | •    |
| 330                        | 33 pF  | •                     | •   | •   | •   | •   | •    | •                     | •  | •   | •   | •   | •   | •                     | •    | •    |    |     |     |     |     |      |      |      |      |
| 390                        | 39 pF  | •                     | •   | •   | •   | •   | •    | •                     | •  | •   | •   | •   | •   | •                     | •    | •    |    |     |     |     |     |      |      |      |      |
| 470                        | 47 pF  | •                     | •   | •   | •   | •   | •    | •                     | •  | •   | •   | •   | •   | •                     | •    | •    |    |     |     |     |     |      |      |      |      |
| 560                        | 56 pF  | •                     | •   | •   | •   | •   | •    | •                     | •  | •   | •   | •   | •   | •                     | •    | •    |    |     |     |     |     |      |      |      |      |
| 680                        | 68 pF  | •                     | •   | •   | •   | •   | •    | •                     | •  | •   | •   | •   | •   | •                     | •    | •    |    |     |     |     |     |      |      |      |      |
| 820                        | 82 pF  | •                     | •   | •   | •   | •   | •    | •                     | •  | •   | •   | •   | •   | •                     | •    | •    |    |     |     |     |     |      |      |      |      |
| 101                        | 100 pF | •                     | •   | •   | •   | •   | •    | •                     | •  | •   | •   | •   | •   | •                     | •    | •    |    |     |     |     |     |      |      |      |      |
| 121                        | 120 pF | •                     | •   | •   | •   | •   | •    | •                     | •  | •   | •   | •   | •   | •                     | •    | •    |    |     |     |     |     |      |      |      |      |
| 151                        | 150 pF | •                     | •   | •   | •   | •   |      |                       | •  | •   | •   | •   |     |                       |      |      |    |     |     |     |     |      |      |      |      |
| 181                        | 180 pF | •                     | •   | •   | •   | •   |      |                       | •  | •   | •   | •   |     |                       |      |      |    |     |     |     |     |      |      |      |      |
| 221                        | 220 pF | •                     | •   | •   | •   | •   |      |                       | •  | •   | •   | •   |     |                       |      |      |    |     |     |     |     |      |      |      |      |
| 271                        | 270 pF | •                     | •   | •   | •   | •   |      |                       | •  | •   | •   | •   |     |                       |      |      |    |     |     |     |     |      |      |      |      |
| 331                        | 330 pF | •                     | •   | •   | •   | •   |      |                       | •  | •   | •   | •   |     |                       |      |      |    |     |     |     |     |      |      |      |      |
| 391                        | 390 pF | •                     | •   | •   | •   | •   |      |                       | •  | •   | •   | •   |     |                       |      |      |    |     |     |     |     |      |      |      |      |
| 471                        | 470 pF | •                     | •   | •   | •   | •   |      |                       | •  | •   | •   | •   |     |                       |      |      |    |     |     |     |     |      |      |      |      |
| 561                        | 560 pF | •                     | •   | •   | •   | •   |      |                       | •  | •   | •   | •   |     |                       |      |      |    |     |     |     |     |      |      |      |      |
| 681                        | 680 pF | •                     | •   | •   | •   | •   |      |                       | •  | •   | •   | •   |     |                       |      |      |    |     |     |     |     |      |      |      |      |
| 821                        | 820 pF | •                     | •   | •   | •   | •   |      |                       | •  | •   | •   | •   |     |                       |      |      |    |     |     |     |     |      |      |      |      |
| 102                        | 1.0 nF | •                     | •   | •   | •   | •   |      |                       | •  | •   | •   | •   |     |                       |      |      |    |     |     |     |     |      |      |      |      |
| 122                        | 1.2 nF | •                     | •   | •   |     |     |      |                       | •  | •   | •   | •   |     |                       |      |      |    |     |     |     |     |      |      |      |      |
| 152                        | 1.5 nF | •                     | •   | •   |     |     |      |                       | •  | •   | •   | •   |     |                       |      |      |    |     |     |     |     |      |      |      |      |
| 182                        | 1.8 nF | •                     | •   | •   |     |     |      |                       | •  | •   | •   | •   |     |                       |      |      |    |     |     |     |     |      |      |      |      |
| 222                        | 2.2 nF | •                     | •   | •   |     |     |      |                       | •  | •   | •   | •   |     |                       |      |      |    |     |     |     |     |      |      |      |      |
| 272                        | 2.7 nF | •                     | •   |     |     |     |      |                       | •  | •   | •   | •   |     |                       |      |      |    |     |     |     |     |      |      |      |      |
| 332                        | 3.3 nF | •                     | •   |     |     |     |      |                       | •  | •   | •   | •   |     |                       |      |      |    |     |     |     |     |      |      |      |      |
| 392                        | 3.9 nF | •                     |     |     |     |     |      |                       | •  | •   | •   | •   |     |                       |      |      |    |     |     |     |     |      |      |      |      |
| 472                        | 4.7 nF | •                     |     |     |     |     |      |                       | •  | •   | •   | •   |     |                       |      |      |    |     |     |     |     |      |      |      |      |
| 562                        | 5.6 nF |                       |     |     |     |     |      |                       | •  |     |     |     |     |                       |      |      |    |     |     |     |     |      |      |      |      |
| 682                        | 6.8 nF |                       |     |     |     |     |      |                       | •  |     |     |     |     |                       |      |      |    |     |     |     |     |      |      |      |      |
| 822                        | 8.2 nF |                       |     |     |     |     |      |                       | •  |     |     |     |     |                       |      |      |    |     |     |     |     |      |      |      |      |
| 103                        | 10 nF  |                       |     |     |     |     |      |                       |    |     |     |     |     |                       |      |      |    |     |     |     |     |      |      |      |      |
| 123                        | 12 nF  |                       |     |     |     |     |      |                       |    |     |     |     |     |                       |      |      |    |     |     |     |     |      |      |      |      |
| 153                        | 15 nF  |                       |     |     |     |     |      |                       |    |     |     |     |     |                       |      |      |    |     |     |     |     |      |      |      |      |
| 183                        | 18 nF  |                       |     |     |     |     |      |                       |    |     |     |     |     |                       |      |      |    |     |     |     |     |      |      |      |      |
| 223                        | 22 nF  |                       |     |     |     |     |      |                       |    |     |     |     |     |                       |      |      |    |     |     |     |     |      |      |      |      |
| 273                        | 27 nF  |                       |     |     |     |     |      |                       |    |     |     |     |     |                       |      |      |    |     |     |     |     |      |      |      |      |
| 333                        | 33 nF  |                       |     |     |     |     |      |                       |    |     |     |     |     |                       |      |      |    |     |     |     |     |      |      |      |      |
| 393                        | 39 nF  |                       |     |     |     |     |      |                       |    |     |     |     |     |                       |      |      |    |     |     |     |     |      |      |      |      |
| 473                        | 47 nF  |                       |     |     |     |     |      |                       |    |     |     |     |     |                       |      |      |    |     |     |     |     |      |      |      |      |
| 563                        | 56 nF  |                       |     |     |     |     |      |                       |    |     |     |     |     |                       |      |      |    |     |     |     |     |      |      |      |      |
| 683                        | 68 nF  |                       |     |     |     |     |      |                       |    |     |     |     |     |                       |      |      |    |     |     |     |     |      |      |      |      |
| 823                        | 82 nF  |                       |     |     |     |     |      |                       |    |     |     |     |     |                       |      |      |    |     |     |     |     |      |      |      |      |
| 104                        | 100 nF |                       |     |     |     |     |      |                       |    |     |     |     |     |                       |      |      |    |     |     |     |     |      |      |      |      |

**Notes**

• RoHS-compliant

<sup>(1)</sup> See soldering recommendations within this data book, or visit: [www.vishay.com/doc?45034](http://www.vishay.com/doc?45034)



| SELECTION CHART            |        |                       |     |     |     |     |      |      |      |                       |    |     |     |     |     |      |
|----------------------------|--------|-----------------------|-----|-----|-----|-----|------|------|------|-----------------------|----|-----|-----|-----|-----|------|
| DIELECTRIC                 |        | COG (NP0)             |     |     |     |     |      |      |      |                       |    |     |     |     |     |      |
| STYLE                      |        | VJ1812 <sup>(1)</sup> |     |     |     |     |      |      |      | VJ1825 <sup>(1)</sup> |    |     |     |     |     |      |
| CASE CODE                  |        | 1812                  |     |     |     |     |      |      |      | 1825                  |    |     |     |     |     |      |
| VOLTAGE (V <sub>DC</sub> ) |        | 50                    | 100 | 200 | 500 | 630 | 1000 | 1500 | 2000 | 3000                  | 50 | 100 | 200 | 500 | 630 | 1000 |
| VOLTAGE CODE               |        | A                     | B   | C   | E   | L   | G    | R    | F    | H                     | A  | B   | C   | E   | L   | G    |
| CAP. CODE                  | CAP.   |                       |     |     |     |     |      |      |      |                       |    |     |     |     |     |      |
| 100                        | 10 pF  |                       |     |     |     |     |      |      |      |                       |    |     |     |     |     |      |
| 120                        | 12 pF  |                       |     |     |     |     |      |      |      |                       |    |     |     |     |     |      |
| 150                        | 15 pF  |                       |     |     |     |     |      |      |      |                       |    |     |     |     |     |      |
| 180                        | 18 pF  |                       |     |     |     |     |      |      |      |                       |    |     |     |     | •   | •    |
| 220                        | 22 pF  |                       |     |     |     |     |      |      |      |                       |    |     |     |     | •   | •    |
| 270                        | 27 pF  | •                     | •   | •   | •   | •   | •    | •    | •    | •                     |    |     |     |     | •   | •    |
| 330                        | 33 pF  | •                     | •   | •   | •   | •   | •    | •    | •    | •                     | •  | •   | •   | •   | •   | •    |
| 390                        | 39 pF  | •                     | •   | •   | •   | •   | •    | •    | •    | •                     | •  | •   | •   | •   | •   | •    |
| 470                        | 47 pF  | •                     | •   | •   | •   | •   | •    | •    | •    | •                     | •  | •   | •   | •   | •   | •    |
| 560                        | 56 pF  | •                     | •   | •   | •   | •   | •    | •    | •    | •                     | •  | •   | •   | •   | •   | •    |
| 680                        | 68 pF  | •                     | •   | •   | •   | •   | •    | •    | •    | •                     | •  | •   | •   | •   | •   | •    |
| 820                        | 82 pF  | •                     | •   | •   | •   | •   | •    | •    | •    | •                     | •  | •   | •   | •   | •   | •    |
| 101                        | 100 pF | •                     | •   | •   | •   | •   | •    | •    | •    | •                     | •  | •   | •   | •   | •   | •    |
| 121                        | 120 pF | •                     | •   | •   | •   | •   | •    | •    | •    | •                     | •  | •   | •   | •   | •   | •    |
| 151                        | 150 pF | •                     | •   | •   | •   | •   | •    | •    | •    | •                     | •  | •   | •   | •   | •   | •    |
| 181                        | 180 pF | •                     | •   | •   | •   | •   | •    | •    | •    | •                     | •  | •   | •   | •   | •   | •    |
| 221                        | 220 pF | •                     | •   | •   | •   | •   | •    | •    | •    | •                     | •  | •   | •   | •   | •   | •    |
| 271                        | 270 pF | •                     | •   | •   | •   | •   | •    | •    | •    | •                     | •  | •   | •   | •   | •   | •    |
| 331                        | 330 pF | •                     | •   | •   | •   | •   | •    | •    | •    | •                     | •  | •   | •   | •   | •   | •    |
| 391                        | 390 pF | •                     | •   | •   | •   | •   | •    | •    | •    | •                     |    | •   | •   | •   | •   | •    |
| 471                        | 470 pF | •                     | •   | •   | •   | •   | •    | •    | •    | •                     |    | •   | •   | •   | •   | •    |
| 561                        | 560 pF | •                     | •   | •   | •   | •   | •    | •    | •    | •                     |    | •   | •   | •   | •   | •    |
| 681                        | 680 pF | •                     | •   | •   | •   | •   | •    | •    | •    | •                     |    | •   | •   | •   | •   | •    |
| 821                        | 820 pF | •                     | •   | •   | •   | •   | •    |      |      |                       |    | •   | •   | •   | •   | •    |
| 102                        | 1.0 nF | •                     | •   | •   | •   | •   | •    |      |      |                       |    | •   | •   | •   | •   | •    |
| 122                        | 1.2 nF | •                     | •   | •   | •   | •   | •    |      |      |                       |    | •   | •   | •   | •   | •    |
| 152                        | 1.5 nF | •                     | •   | •   | •   | •   | •    |      |      |                       |    | •   | •   | •   | •   | •    |
| 182                        | 1.8 nF | •                     | •   | •   | •   | •   | •    |      |      |                       |    | •   | •   | •   | •   | •    |
| 222                        | 2.2 nF | •                     | •   | •   | •   | •   | •    |      |      |                       |    | •   | •   | •   | •   | •    |
| 272                        | 2.7 nF | •                     | •   | •   | •   |     |      |      |      |                       |    | •   | •   | •   | •   |      |
| 332                        | 3.3 nF | •                     | •   | •   | •   |     |      |      |      |                       |    | •   | •   | •   | •   |      |
| 392                        | 3.9 nF | •                     | •   | •   | •   |     |      |      |      |                       |    | •   | •   | •   | •   |      |
| 472                        | 4.7 nF | •                     | •   | •   |     |     |      |      |      |                       |    | •   | •   | •   | •   |      |
| 562                        | 5.6 nF | •                     | •   | •   |     |     |      |      |      |                       |    | •   | •   | •   | •   |      |
| 682                        | 6.8 nF | •                     | •   | •   |     |     |      |      |      |                       |    | •   | •   | •   | •   |      |
| 822                        | 8.2 nF | •                     | •   | •   |     |     |      |      |      |                       |    | •   | •   | •   | •   |      |
| 103                        | 10 nF  | •                     | •   | •   |     |     |      |      |      |                       |    | •   | •   | •   |     |      |
| 123                        | 12 nF  | •                     | •   |     |     |     |      |      |      |                       |    | •   | •   | •   |     |      |
| 153                        | 15 nF  | •                     |     |     |     |     |      |      |      |                       |    | •   | •   | •   |     |      |
| 183                        | 18 nF  | •                     |     |     |     |     |      |      |      |                       |    | •   | •   | •   |     |      |
| 223                        | 22 nF  |                       |     |     |     |     |      |      |      |                       |    | •   | •   | •   |     |      |
| 273                        | 27 nF  |                       |     |     |     |     |      |      |      |                       |    | •   | •   |     |     |      |
| 333                        | 33 nF  |                       |     |     |     |     |      |      |      |                       |    | •   |     |     |     |      |
| 393                        | 39 nF  |                       |     |     |     |     |      |      |      |                       |    |     |     |     |     |      |
| 473                        | 47 nF  |                       |     |     |     |     |      |      |      |                       |    |     |     |     |     |      |
| 563                        | 56 nF  |                       |     |     |     |     |      |      |      |                       |    |     |     |     |     |      |
| 683                        | 68 nF  |                       |     |     |     |     |      |      |      |                       |    |     |     |     |     |      |
| 823                        | 82 nF  |                       |     |     |     |     |      |      |      |                       |    |     |     |     |     |      |
| 104                        | 100 nF |                       |     |     |     |     |      |      |      |                       |    |     |     |     |     |      |

**Notes**

RoHS-compliant

<sup>(1)</sup> See soldering recommendations within this data book, or visit: [www.vishay.com/doc?45034](http://www.vishay.com/doc?45034)



| SELECTION CHART            |        |                       |     |     |     |     |      |                       |     |     |     |     |      |
|----------------------------|--------|-----------------------|-----|-----|-----|-----|------|-----------------------|-----|-----|-----|-----|------|
| DIELECTRIC                 |        | COG (NPO)             |     |     |     |     |      |                       |     |     |     |     |      |
| STYLE                      |        | VJ2220 <sup>(1)</sup> |     |     |     |     |      | VJ2225 <sup>(1)</sup> |     |     |     |     |      |
| CASE CODE                  |        | 2220                  |     |     |     |     |      | 2225                  |     |     |     |     |      |
| VOLTAGE (V <sub>DC</sub> ) |        | 50                    | 100 | 200 | 500 | 630 | 1000 | 50                    | 100 | 200 | 500 | 630 | 1000 |
| VOLTAGE CODE               |        | A                     | B   | C   | E   | L   | G    | A                     | B   | C   | E   | L   | G    |
| CAP. CODE                  | CAP.   |                       |     |     |     |     |      |                       |     |     |     |     |      |
| 100                        | 10 pF  |                       |     |     |     |     |      |                       |     |     |     |     |      |
| 120                        | 12 pF  |                       |     |     |     |     |      |                       |     |     |     |     |      |
| 150                        | 15 pF  |                       |     |     |     |     |      |                       |     |     |     |     |      |
| 180                        | 18 pF  |                       |     |     |     |     |      |                       |     |     |     |     |      |
| 220                        | 22 pF  |                       |     |     |     |     |      |                       |     |     |     |     |      |
| 270                        | 27 pF  |                       |     |     |     |     |      |                       |     |     |     |     |      |
| 330                        | 33 pF  |                       |     |     |     |     |      |                       |     |     |     |     |      |
| 390                        | 39 pF  |                       |     |     |     |     |      |                       |     |     |     |     |      |
| 470                        | 47 pF  |                       |     |     |     |     |      |                       |     |     |     |     |      |
| 560                        | 56 pF  |                       |     |     |     |     |      |                       |     |     |     |     |      |
| 680                        | 68 pF  |                       |     |     |     |     |      |                       |     |     |     |     |      |
| 820                        | 82 pF  |                       |     |     |     |     |      |                       |     |     |     |     |      |
| 101                        | 100 pF |                       |     |     |     |     |      |                       |     |     |     |     |      |
| 121                        | 120 pF |                       |     |     |     |     |      |                       |     |     |     |     |      |
| 151                        | 150 pF |                       |     |     |     |     |      |                       |     |     |     |     |      |
| 181                        | 180 pF |                       |     |     |     |     |      |                       |     |     |     |     |      |
| 221                        | 220 pF |                       |     |     |     |     |      |                       |     |     |     |     |      |
| 271                        | 270 pF | •                     | •   | •   | •   | •   | •    | •                     | •   | •   | •   | •   | •    |
| 331                        | 330 pF | •                     | •   | •   | •   | •   | •    | •                     | •   | •   | •   | •   | •    |
| 391                        | 390 pF | •                     | •   | •   | •   | •   | •    | •                     | •   | •   | •   | •   | •    |
| 471                        | 470 pF | •                     | •   | •   | •   | •   | •    | •                     | •   | •   | •   | •   | •    |
| 561                        | 560 pF | •                     | •   | •   | •   | •   | •    | •                     | •   | •   | •   | •   | •    |
| 681                        | 680 pF | •                     | •   | •   | •   | •   | •    | •                     | •   | •   | •   | •   | •    |
| 821                        | 820 pF | •                     | •   | •   | •   | •   | •    | •                     | •   | •   | •   | •   | •    |
| 102                        | 1.0 nF | •                     | •   | •   | •   | •   | •    | •                     | •   | •   | •   | •   | •    |
| 122                        | 1.2 nF | •                     | •   | •   | •   | •   | •    | •                     | •   | •   | •   | •   | •    |
| 152                        | 1.5 nF | •                     | •   | •   | •   | •   | •    | •                     | •   | •   | •   | •   | •    |
| 182                        | 1.8 nF | •                     | •   | •   | •   | •   | •    | •                     | •   | •   | •   | •   | •    |
| 222                        | 2.2 nF | •                     | •   | •   | •   | •   | •    | •                     | •   | •   | •   | •   | •    |
| 272                        | 2.7 nF | •                     | •   | •   | •   | •   | •    | •                     | •   | •   | •   | •   | •    |
| 332                        | 3.3 nF | •                     | •   | •   | •   | •   | •    | •                     | •   | •   | •   | •   | •    |
| 392                        | 3.9 nF | •                     | •   | •   | •   | •   | •    | •                     | •   | •   | •   | •   | •    |
| 472                        | 4.7 nF | •                     | •   | •   | •   | •   | •    | •                     | •   | •   | •   | •   | •    |
| 562                        | 5.6 nF | •                     | •   | •   |     |     |      | •                     | •   | •   | •   |     |      |
| 682                        | 6.8 nF | •                     | •   | •   |     |     |      | •                     | •   | •   | •   |     |      |
| 822                        | 8.2 nF | •                     | •   | •   |     |     |      | •                     | •   | •   | •   |     |      |
| 103                        | 10 nF  | •                     | •   | •   |     |     |      | •                     | •   | •   | •   |     |      |
| 123                        | 12 nF  | •                     | •   | •   |     |     |      | •                     | •   | •   | •   |     |      |
| 153                        | 15 nF  | •                     | •   |     |     |     |      | •                     | •   | •   |     |     |      |
| 183                        | 18 nF  | •                     | •   |     |     |     |      | •                     | •   | •   |     |     |      |
| 223                        | 22 nF  | •                     | •   |     |     |     |      | •                     | •   | •   |     |     |      |
| 273                        | 27 nF  | •                     | •   |     |     |     |      | •                     | •   | •   |     |     |      |
| 333                        | 33 nF  | •                     |     |     |     |     |      | •                     | •   | •   |     |     |      |
| 393                        | 39 nF  | •                     |     |     |     |     |      | •                     | •   |     |     |     |      |
| 473                        | 47 nF  |                       |     |     |     |     |      | •                     |     |     |     |     |      |
| 563                        | 56 nF  |                       |     |     |     |     |      |                       |     |     |     |     |      |
| 683                        | 68 nF  |                       |     |     |     |     |      |                       |     |     |     |     |      |
| 823                        | 82 nF  |                       |     |     |     |     |      |                       |     |     |     |     |      |
| 104                        | 100 nF |                       |     |     |     |     |      |                       |     |     |     |     |      |

Notes

• RoHS-compliant

(1) See soldering recommendations within this data book, or visit: [www.vishay.com/doc?45034](http://www.vishay.com/doc?45034)



| SELECTION CHART            |        |                       |    |    |     |     |     |     |    |                       |    |     |     |     |     |      |      |      |
|----------------------------|--------|-----------------------|----|----|-----|-----|-----|-----|----|-----------------------|----|-----|-----|-----|-----|------|------|------|
| DIELECTRIC                 |        | X7R                   |    |    |     |     |     |     |    |                       |    |     |     |     |     |      |      |      |
| STYLE                      |        | VJ0805 <sup>(1)</sup> |    |    |     |     |     |     |    | VJ1206 <sup>(1)</sup> |    |     |     |     |     |      |      |      |
| CASE CODE                  |        | 0805                  |    |    |     |     |     |     |    | 1206                  |    |     |     |     |     |      |      |      |
| VOLTAGE (V <sub>DC</sub> ) |        | 16                    | 25 | 50 | 100 | 200 | 500 | 630 | 16 | 25                    | 50 | 100 | 200 | 500 | 630 | 1000 | 1500 | 2000 |
| VOLTAGE CODE               |        | J                     | X  | A  | B   | C   | E   | L   | J  | X                     | A  | B   | C   | E   | L   | G    | R    | F    |
| CAP. CODE                  | CAP.   |                       |    |    |     |     |     |     |    |                       |    |     |     |     |     |      |      |      |
| 101                        | 100 pF |                       |    |    |     |     |     |     |    |                       |    |     |     |     |     |      |      |      |
| 121                        | 120 pF |                       |    |    |     |     |     |     |    |                       |    |     |     |     |     |      |      |      |
| 151                        | 150 pF |                       |    |    |     |     |     |     |    |                       |    |     |     |     |     |      |      |      |
| 181                        | 180 pF |                       |    |    |     |     |     |     |    |                       |    |     |     |     |     |      |      |      |
| 221                        | 220 pF |                       |    |    |     |     |     |     |    |                       |    |     |     |     |     |      |      |      |
| 271                        | 270 pF |                       |    |    |     |     |     |     | •  | •                     | •  | •   | •   | •   | •   | •    | •    | •    |
| 331                        | 330 pF |                       |    |    |     |     |     |     | •  | •                     | •  | •   | •   | •   | •   | •    | •    | •    |
| 391                        | 390 pF |                       |    |    |     |     |     |     | •  | •                     | •  | •   | •   | •   | •   | •    | •    | •    |
| 471                        | 470 pF | ••                    | •• | •• | ••  | ••  | •   | •   | •  | •                     | •  | •   | •   | •   | •   | •    | •    | •    |
| 561                        | 560 pF | ••                    | •• | •• | ••  | ••  | •   | •   | •  | •                     | •  | •   | •   | •   | •   | •    | •    | •    |
| 681                        | 680 pF | ••                    | •• | •• | ••  | ••  | •   | •   | •  | •                     | •  | •   | •   | •   | •   | •    | •    | •    |
| 821                        | 820 pF | ••                    | •• | •• | ••  | ••  | •   | •   | •  | •                     | •  | •   | •   | •   | •   | •    | •    | •    |
| 102                        | 1.0 nF | ••                    | •• | •• | ••  | ••  | •   | •   | •  | •                     | •  | •   | •   | •   | •   | •    | •    | •    |
| 122                        | 1.2 nF | ••                    | •• | •• | ••  | ••  | •   | •   | •  | •                     | •  | •   | •   | •   | •   | •    | •    | •    |
| 152                        | 1.5 nF | ••                    | •• | •• | ••  | ••  | •   | •   | •  | •                     | •  | •   | •   | •   | •   | •    | •    | •    |
| 182                        | 1.8 nF | ••                    | •• | •• | ••  | ••  | •   | •   | •  | •                     | •  | •   | •   | •   | •   | •    | •    | •    |
| 222                        | 2.2 nF | ••                    | •• | •• | ••  | ••  | •   | •   | •  | •                     | •  | •   | •   | •   | •   | •    | •    | •    |
| 272                        | 2.7 nF | ••                    | •• | •• | ••  | ••  | •   | •   | •  | •                     | •  | •   | •   | •   | •   | •    | •    | •    |
| 332                        | 3.3 nF | ••                    | •• | •• | ••  | ••  | •   | •   | •  | •                     | •  | •   | •   | •   | •   | •    | •    | •    |
| 392                        | 3.9 nF | ••                    | •• | •• | ••  | ••  | •   | •   | •  | •                     | •  | •   | •   | •   | •   | •    | •    | •    |
| 472                        | 4.7 nF | ••                    | •• | •• | ••  | ••  | •   | •   | •  | •                     | •  | •   | •   | •   | •   | •    | •    | •    |
| 562                        | 5.6 nF | ••                    | •• | •• | ••  | •   |     |     | •  | •                     | •  | •   | •   | •   | •   | •    | •    | •    |
| 682                        | 6.8 nF | ••                    | •• | •• | ••  | •   |     |     | •  | •                     | •  | •   | •   | •   | •   | •    | •    | •    |
| 822                        | 8.2 nF | ••                    | •• | •• | ••  | •   |     |     | •  | •                     | •  | •   | •   | •   | •   | •    | •    | •    |
| 103                        | 10 nF  | ••                    | •• | •• | ••  | •   |     |     | •  | •                     | •  | •   | •   | •   | •   | •    | •    | •    |
| 123                        | 12 nF  | ••                    | •• | •• | •   | •   |     |     | •  | •                     | •  | •   | •   | •   | •   | •    | •    | •    |
| 153                        | 15 nF  | ••                    | •• | •• | •   | •   |     |     | •  | •                     | •  | •   | •   | •   | •   | •    | •    | •    |
| 183                        | 18 nF  | ••                    | •• | •• | •   | •   |     |     | •  | •                     | •  | •   | •   | •   | •   | •    | •    | •    |
| 223                        | 22 nF  | ••                    | •• | •• | •   | •   |     |     | •  | •                     | •  | •   | •   | •   | •   | •    | •    | •    |
| 273                        | 27 nF  | ••                    | •  | •  | •   | •   |     |     | •  | •                     | •  | •   | •   | •   | •   | •    | •    | •    |
| 333                        | 33 nF  | •                     | •  | •  | •   |     |     |     | •  | •                     | •  | •   | •   | •   | •   | •    | •    | •    |
| 393                        | 39 nF  | •                     | •  | •  | •   |     |     |     | •  | •                     | •  | •   | •   | •   | •   | •    | •    | •    |
| 473                        | 47 nF  | •                     | •  | •  | •   |     |     |     | •  | •                     | •  | •   | •   | •   | •   | •    | •    | •    |
| 563                        | 56 nF  | •                     | •  | •  |     |     |     |     | •  | •                     | •  | •   | •   | •   | •   | •    | •    | •    |
| 683                        | 68 nF  | •                     | •  | •  |     |     |     |     | •  | •                     | •  | •   | •   | •   | •   | •    | •    | •    |
| 823                        | 82 nF  | •                     | •  | •  |     |     |     |     | •  | •                     | •  | •   | •   | •   | •   | •    | •    | •    |
| 104                        | 100 nF | •                     | •  | •  |     |     |     |     | •  | •                     | •  | •   | •   | •   | •   | •    | •    | •    |
| 124                        | 120 nF | •                     | •  |    |     |     |     |     | •  | •                     | •  | •   | •   | •   | •   | •    | •    | •    |
| 154                        | 150 nF | •                     | •  |    |     |     |     |     | •  | •                     | •  | •   | •   | •   | •   | •    | •    | •    |
| 184                        | 180 nF | •                     |    |    |     |     |     |     | •  | •                     | •  | •   | •   | •   | •   | •    | •    | •    |
| 224                        | 220 nF | •                     |    |    |     |     |     |     | •  | •                     | •  | •   | •   | •   | •   | •    | •    | •    |
| 274                        | 270 nF |                       |    |    |     |     |     |     | •  | •                     | •  | •   | •   | •   | •   | •    | •    | •    |
| 334                        | 330 nF |                       |    |    |     |     |     |     | •  | •                     | •  | •   | •   | •   | •   | •    | •    | •    |
| 394                        | 390 nF |                       |    |    |     |     |     |     | •  | •                     | •  | •   | •   | •   | •   | •    | •    | •    |
| 474                        | 470 nF |                       |    |    |     |     |     |     | •  | •                     | •  | •   | •   | •   | •   | •    | •    | •    |
| 564                        | 560 nF |                       |    |    |     |     |     |     | •  | •                     | •  | •   | •   | •   | •   | •    | •    | •    |
| 684                        | 680 nF |                       |    |    |     |     |     |     | •  | •                     | •  | •   | •   | •   | •   | •    | •    | •    |
| 824                        | 820 nF |                       |    |    |     |     |     |     | •  | •                     | •  | •   | •   | •   | •   | •    | •    | •    |
| 105                        | 1.0 μF |                       |    |    |     |     |     |     |    |                       |    |     |     |     |     |      |      |      |
| 125                        | 1.2 μF |                       |    |    |     |     |     |     |    |                       |    |     |     |     |     |      |      |      |
| 155                        | 1.5 μF |                       |    |    |     |     |     |     |    |                       |    |     |     |     |     |      |      |      |
| 185                        | 1.8 μF |                       |    |    |     |     |     |     |    |                       |    |     |     |     |     |      |      |      |
| 225                        | 2.2 μF |                       |    |    |     |     |     |     |    |                       |    |     |     |     |     |      |      |      |

**Notes**

•• RoHS-compliant

•• Paper tape • Plastic tape

<sup>(1)</sup> See soldering recommendations within this data book, or visit: [www.vishay.com/doc?45034](http://www.vishay.com/doc?45034)



| SELECTION CHART            |        |                       |    |    |     |     |     |     |      |      |      |                       |      |      |      |      |
|----------------------------|--------|-----------------------|----|----|-----|-----|-----|-----|------|------|------|-----------------------|------|------|------|------|
| DIELECTRIC                 |        | X7R                   |    |    |     |     |     |     |      |      |      |                       |      |      |      |      |
| STYLE                      |        | VJ1210 <sup>(1)</sup> |    |    |     |     |     |     |      |      |      | VJ1808 <sup>(1)</sup> |      |      |      |      |
| CASE CODE                  |        | 1210                  |    |    |     |     |     |     |      |      |      | 1808                  |      |      |      |      |
| VOLTAGE (V <sub>DC</sub> ) |        | 16                    | 25 | 50 | 100 | 200 | 500 | 630 | 1000 | 1500 | 2000 | 630                   | 1000 | 1500 | 2000 | 3000 |
| VOLTAGE CODE               |        | J                     | X  | A  | B   | C   | E   | L   | G    | R    | F    | L                     | G    | R    | F    | H    |
| CAP. CODE                  | CAP.   |                       |    |    |     |     |     |     |      |      |      |                       |      |      |      |      |
| 101                        | 100 pF |                       |    |    |     |     |     |     |      |      |      |                       |      |      |      |      |
| 121                        | 120 pF |                       |    |    |     |     |     |     |      |      |      |                       |      |      |      |      |
| 151                        | 150 pF |                       |    |    |     |     |     |     |      |      |      |                       |      |      |      |      |
| 181                        | 180 pF |                       |    |    |     |     |     |     |      |      |      |                       |      |      |      |      |
| 221                        | 220 pF |                       |    |    |     |     |     |     |      |      |      |                       |      |      |      | •    |
| 271                        | 270 pF |                       |    |    |     |     |     |     |      |      |      |                       |      |      |      | •    |
| 331                        | 330 pF |                       |    |    |     |     |     |     |      |      |      |                       |      |      |      | •    |
| 391                        | 390 pF |                       |    |    |     |     |     |     | •    | •    | •    |                       |      |      |      | •    |
| 471                        | 470 pF |                       |    |    |     |     |     |     | •    | •    | •    | •                     | •    | •    | •    | •    |
| 561                        | 560 pF |                       |    |    |     |     |     |     | •    | •    | •    | •                     | •    | •    | •    | •    |
| 681                        | 680 pF |                       |    |    |     |     |     |     | •    | •    | •    | •                     | •    | •    | •    | •    |
| 821                        | 820 pF |                       |    |    |     |     |     |     | •    | •    | •    | •                     | •    | •    | •    | •    |
| 102                        | 1.0 nF |                       |    |    |     |     |     |     | •    | •    | •    | •                     | •    | •    | •    | •    |
| 122                        | 1.2 nF |                       |    |    |     |     |     |     | •    | •    | •    | •                     | •    | •    | •    | •    |
| 152                        | 1.5 nF |                       |    |    |     |     |     |     | •    | •    | •    | •                     | •    | •    | •    | •    |
| 182                        | 1.8 nF |                       |    |    |     |     |     |     | •    | •    | •    | •                     | •    | •    | •    |      |
| 222                        | 2.2 nF |                       |    |    |     |     |     |     | •    | •    | •    | •                     | •    | •    | •    |      |
| 272                        | 2.7 nF |                       |    |    |     |     |     |     | •    | •    | •    | •                     | •    | •    | •    |      |
| 332                        | 3.3 nF |                       |    |    |     |     |     |     | •    | •    | •    | •                     | •    | •    | •    |      |
| 392                        | 3.9 nF |                       |    |    |     |     |     |     | •    | •    |      | •                     | •    | •    |      |      |
| 472                        | 4.7 nF |                       |    |    |     |     |     |     | •    | •    |      | •                     | •    | •    |      |      |
| 562                        | 5.6 nF |                       |    |    |     |     |     |     | •    |      |      | •                     | •    | •    |      |      |
| 682                        | 6.8 nF |                       |    |    |     |     |     |     | •    |      |      | •                     | •    | •    |      |      |
| 822                        | 8.2 nF |                       |    |    |     |     |     |     |      |      |      | •                     | •    |      |      |      |
| 103                        | 10 nF  | •                     | •  | •  | •   | •   | •   | •   | •    |      |      | •                     | •    |      |      |      |
| 123                        | 12 nF  | •                     | •  | •  | •   | •   | •   | •   |      |      |      | •                     | •    |      |      |      |
| 153                        | 15 nF  | •                     | •  | •  | •   | •   | •   | •   |      |      |      | •                     | •    |      |      |      |
| 183                        | 18 nF  | •                     | •  | •  | •   | •   | •   | •   |      |      |      | •                     | •    |      |      |      |
| 223                        | 22 nF  | •                     | •  | •  | •   | •   | •   | •   |      |      |      |                       |      |      |      |      |
| 273                        | 27 nF  | •                     | •  | •  | •   | •   | •   | •   |      |      |      |                       |      |      |      |      |
| 333                        | 33 nF  | •                     | •  | •  | •   | •   | •   | •   |      |      |      |                       |      |      |      |      |
| 393                        | 39 nF  | •                     | •  | •  | •   | •   | •   | •   |      |      |      |                       |      |      |      |      |
| 473                        | 47 nF  | •                     | •  | •  | •   | •   |     |     |      |      |      |                       |      |      |      |      |
| 563                        | 56 nF  | •                     | •  | •  | •   | •   |     |     |      |      |      |                       |      |      |      |      |
| 683                        | 68 nF  | •                     | •  | •  | •   | •   |     |     |      |      |      |                       |      |      |      |      |
| 823                        | 82 nF  | •                     | •  | •  | •   | •   |     |     |      |      |      |                       |      |      |      |      |
| 104                        | 100 nF | •                     | •  | •  | •   | •   |     |     |      |      |      |                       |      |      |      |      |
| 124                        | 120 nF | •                     | •  | •  | •   | •   |     |     |      |      |      |                       |      |      |      |      |
| 154                        | 150 nF | •                     | •  | •  | •   | •   |     |     |      |      |      |                       |      |      |      |      |
| 184                        | 180 nF | •                     | •  | •  | •   |     |     |     |      |      |      |                       |      |      |      |      |
| 224                        | 220 nF | •                     | •  | •  | •   |     |     |     |      |      |      |                       |      |      |      |      |
| 274                        | 270 nF | •                     | •  | •  | •   |     |     |     |      |      |      |                       |      |      |      |      |
| 334                        | 330 nF | •                     | •  | •  | •   |     |     |     |      |      |      |                       |      |      |      |      |
| 394                        | 390 nF | •                     | •  | •  | •   |     |     |     |      |      |      |                       |      |      |      |      |
| 474                        | 470 nF | •                     | •  | •  | •   |     |     |     |      |      |      |                       |      |      |      |      |
| 564                        | 560 nF | •                     | •  | •  |     |     |     |     |      |      |      |                       |      |      |      |      |
| 684                        | 680 nF | •                     | •  | •  |     |     |     |     |      |      |      |                       |      |      |      |      |
| 824                        | 820 nF | •                     | •  |    |     |     |     |     |      |      |      |                       |      |      |      |      |
| 105                        | 1.0 μF | •                     |    |    |     |     |     |     |      |      |      |                       |      |      |      |      |
| 125                        | 1.2 μF |                       |    |    |     |     |     |     |      |      |      |                       |      |      |      |      |
| 155                        | 1.5 μF |                       |    |    |     |     |     |     |      |      |      |                       |      |      |      |      |
| 185                        | 1.8 μF |                       |    |    |     |     |     |     |      |      |      |                       |      |      |      |      |
| 225                        | 2.2 μF |                       |    |    |     |     |     |     |      |      |      |                       |      |      |      |      |

Notes

• RoHS-compliant

<sup>(1)</sup> See soldering recommendations within this data book, or visit: [www.vishay.com/doc?45034](http://www.vishay.com/doc?45034)



| SELECTION CHART            |        |                       |     |     |     |     |     |      |      |      |                       |     |     |     |     |      |      |      |
|----------------------------|--------|-----------------------|-----|-----|-----|-----|-----|------|------|------|-----------------------|-----|-----|-----|-----|------|------|------|
| DIELECTRIC                 |        | X7R                   |     |     |     |     |     |      |      |      |                       |     |     |     |     |      |      |      |
| STYLE                      |        | VJ1812 <sup>(1)</sup> |     |     |     |     |     |      |      |      | VJ1825 <sup>(1)</sup> |     |     |     |     |      |      |      |
| CASE CODE                  |        | 1812                  |     |     |     |     |     |      |      |      | 1825                  |     |     |     |     |      |      |      |
| VOLTAGE (V <sub>DC</sub> ) |        | 50                    | 100 | 200 | 250 | 500 | 630 | 1000 | 1500 | 2000 | 3000                  | 100 | 200 | 500 | 630 | 1000 | 1500 | 2000 |
| VOLTAGE CODE               |        | A                     | B   | C   | P   | E   | L   | G    | R    | F    | H                     | B   | C   | E   | L   | G    | R    | F    |
| CAP. CODE                  | CAP.   |                       |     |     |     |     |     |      |      |      |                       |     |     |     |     |      |      |      |
| 101                        | 100 pF | •                     | •   | •   | •   | •   |     |      |      |      |                       |     |     |     |     |      |      |      |
| 121                        | 120 pF | •                     | •   | •   | •   | •   |     |      |      |      |                       |     |     |     |     |      |      |      |
| 151                        | 150 pF | •                     | •   | •   | •   | •   |     |      |      |      |                       |     |     |     |     |      |      |      |
| 181                        | 180 pF | •                     | •   | •   | •   | •   |     |      |      |      |                       |     |     |     |     |      |      |      |
| 221                        | 220 pF | •                     | •   | •   | •   | •   |     |      |      |      |                       |     |     |     |     |      |      |      |
| 271                        | 270 pF | •                     | •   | •   | •   | •   | •   |      |      |      |                       |     |     |     |     |      |      |      |
| 331                        | 330 pF | •                     | •   | •   | •   | •   | •   |      |      |      |                       |     |     |     |     |      |      |      |
| 391                        | 390 pF | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     |     |     |     |     |      |      |      |
| 471                        | 470 pF | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     |     |     |     |     |      |      |      |
| 561                        | 560 pF | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     |     |     |     |     |      |      |      |
| 681                        | 680 pF | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     |     |     |     |     |      |      |      |
| 821                        | 820 pF | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     |     |     |     |     |      |      |      |
| 102                        | 1.0 nF | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     |     |     |     |     |      |      |      |
| 122                        | 1.2 nF | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     |     |     |     |     |      |      |      |
| 152                        | 1.5 nF | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     |     |     |     |     |      |      |      |
| 182                        | 1.8 nF | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     |     |     |     |     |      |      |      |
| 222                        | 2.2 nF | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     |     |     |     |     |      |      |      |
| 272                        | 2.7 nF | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     |     |     |     |     |      |      |      |
| 332                        | 3.3 nF | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     |     |     |     |     |      |      |      |
| 392                        | 3.9 nF | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     |     |     |     |     |      |      |      |
| 472                        | 4.7 nF | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     |     |     |     |     |      |      |      |
| 562                        | 5.6 nF | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     |     |     |     |     |      | •    | •    |
| 682                        | 6.8 nF | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     |     |     |     |     |      | •    | •    |
| 822                        | 8.2 nF | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     |     |     |     |     |      | •    | •    |
| 103                        | 10 nF  | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 123                        | 12 nF  | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 153                        | 15 nF  | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 183                        | 18 nF  | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 203                        | 20 nF  | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 223                        | 22 nF  | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 273                        | 27 nF  | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 333                        | 33 nF  | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 393                        | 39 nF  | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 473                        | 47 nF  | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 563                        | 56 nF  | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 683                        | 68 nF  | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 823                        | 82 nF  | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 104                        | 100 nF | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 124                        | 120 nF | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 154                        | 150 nF | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 184                        | 180 nF | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 224                        | 220 nF | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 274                        | 270 nF | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 334                        | 330 nF | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 394                        | 390 nF | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 474                        | 470 nF | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 564                        | 560 nF | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 684                        | 680 nF | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 824                        | 820 nF | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 105                        | 1.0 μF | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 125                        | 1.2 μF | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 155                        | 1.5 μF | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 185                        | 1.8 μF | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 225                        | 2.2 μF | •                     | •   | •   | •   | •   | •   | •    | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |

**Notes**

• RoHS-compliant

<sup>(1)</sup> See soldering recommendations within this data book, or visit: [www.vishay.com/doc?45034](http://www.vishay.com/doc?45034)



| SELECTION CHART            |        |                       |     |     |     |     |     |      |      |                       |     |     |     |     |      |      |      |
|----------------------------|--------|-----------------------|-----|-----|-----|-----|-----|------|------|-----------------------|-----|-----|-----|-----|------|------|------|
| DIELECTRIC                 |        | X7R                   |     |     |     |     |     |      |      |                       |     |     |     |     |      |      |      |
| STYLE                      |        | VJ2220 <sup>(1)</sup> |     |     |     |     |     |      |      | VJ2225 <sup>(1)</sup> |     |     |     |     |      |      |      |
| CASE CODE                  |        | 2220                  |     |     |     |     |     |      |      | 2225                  |     |     |     |     |      |      |      |
| VOLTAGE (V <sub>DC</sub> ) |        | 50                    | 100 | 200 | 250 | 500 | 630 | 1000 | 2000 | 3000                  | 100 | 200 | 500 | 630 | 1000 | 1500 | 2000 |
| VOLTAGE CODE               |        | A                     | B   | C   | P   | E   | L   | G    | F    | H                     | B   | C   | E   | L   | G    | R    | F    |
| CAP. CODE                  | CAP.   |                       |     |     |     |     |     |      |      |                       |     |     |     |     |      |      |      |
| 101                        | 100 pF |                       |     |     |     |     |     |      |      |                       |     |     |     |     |      |      |      |
| 121                        | 120 pF |                       |     |     |     |     |     |      |      |                       |     |     |     |     |      |      |      |
| 151                        | 150 pF |                       |     |     |     |     |     |      |      |                       |     |     |     |     |      |      |      |
| 181                        | 180 pF |                       |     |     |     |     |     |      |      |                       |     |     |     |     |      |      |      |
| 221                        | 220 pF |                       |     |     |     |     |     |      |      |                       |     |     |     |     |      |      |      |
| 271                        | 270 pF |                       |     |     |     |     |     |      |      |                       |     |     |     |     |      |      |      |
| 331                        | 330 pF |                       |     |     |     |     |     |      |      |                       |     |     |     |     |      |      |      |
| 391                        | 390 pF |                       |     |     |     |     |     |      |      |                       |     |     |     |     |      |      |      |
| 471                        | 470 pF |                       |     |     |     |     |     |      |      |                       |     |     |     |     |      |      |      |
| 561                        | 560 pF |                       |     |     |     |     |     |      |      |                       |     |     |     |     |      |      |      |
| 681                        | 680 pF |                       |     |     |     |     |     |      |      |                       |     |     |     |     |      |      |      |
| 821                        | 820 pF |                       |     |     |     |     |     |      |      |                       |     |     |     |     |      |      |      |
| 102                        | 1.0 nF |                       |     |     |     |     |     |      |      | •                     |     |     |     |     |      |      |      |
| 122                        | 1.2 nF |                       |     |     |     |     |     |      |      | •                     |     |     |     |     |      |      |      |
| 152                        | 1.5 nF |                       |     |     |     |     |     |      |      | •                     |     |     |     |     |      |      |      |
| 182                        | 1.8 nF |                       |     |     |     |     |     |      |      | •                     |     |     |     |     |      |      |      |
| 222                        | 2.2 nF |                       |     |     |     |     |     |      |      | •                     |     |     |     |     |      |      |      |
| 272                        | 2.7 nF |                       |     |     |     |     |     |      |      |                       |     |     |     |     |      |      |      |
| 332                        | 3.3 nF |                       |     |     |     |     |     |      |      |                       |     |     |     |     |      |      |      |
| 392                        | 3.9 nF |                       |     |     |     |     |     |      |      |                       |     |     |     |     |      |      |      |
| 472                        | 4.7 nF |                       |     |     |     |     |     |      |      |                       |     |     |     |     |      |      |      |
| 562                        | 5.6 nF |                       |     |     |     |     |     |      | •    |                       |     |     |     |     |      | •    | •    |
| 682                        | 6.8 nF |                       |     |     |     |     |     |      | •    |                       |     |     |     |     |      | •    | •    |
| 822                        | 8.2 nF |                       |     |     |     |     |     |      | •    |                       |     |     |     |     |      | •    | •    |
| 103                        | 10 nF  | •                     | •   | •   | •   | •   | •   | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 123                        | 12 nF  | •                     | •   | •   | •   | •   | •   | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 153                        | 15 nF  | •                     | •   | •   | •   | •   | •   | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 183                        | 18 nF  | •                     | •   | •   | •   | •   | •   | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 203                        | 20 nF  | •                     | •   | •   | •   | •   | •   | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 223                        | 22 nF  | •                     | •   | •   | •   | •   | •   | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 273                        | 27 nF  | •                     | •   | •   | •   | •   | •   | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 333                        | 33 nF  | •                     | •   | •   | •   | •   | •   | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 393                        | 39 nF  | •                     | •   | •   | •   | •   | •   | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 473                        | 47 nF  | •                     | •   | •   | •   | •   | •   | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 563                        | 56 nF  | •                     | •   | •   | •   | •   | •   | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 683                        | 68 nF  | •                     | •   | •   | •   | •   | •   | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 823                        | 82 nF  | •                     | •   | •   | •   | •   | •   | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 104                        | 100 nF | •                     | •   | •   | •   | •   | •   | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 124                        | 120 nF | •                     | •   | •   | •   | •   | •   | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 154                        | 150 nF | •                     | •   | •   | •   | •   | •   | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 184                        | 180 nF | •                     | •   | •   | •   | •   | •   | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 224                        | 220 nF | •                     | •   | •   | •   | •   | •   | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 274                        | 270 nF | •                     | •   | •   | •   | •   | •   | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 334                        | 330 nF | •                     | •   | •   | •   | •   | •   | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 394                        | 390 nF | •                     | •   | •   | •   | •   | •   | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 474                        | 470 nF | •                     | •   | •   | •   | •   | •   | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 564                        | 560 nF | •                     | •   | •   | •   | •   | •   | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 684                        | 680 nF | •                     | •   | •   | •   | •   | •   | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 824                        | 820 nF | •                     | •   | •   | •   | •   | •   | •    | •    | •                     | •   | •   | •   | •   | •    | •    | •    |
| 105                        | 1.0 μF | •                     | •   |     |     |     |     |      |      |                       | •   | •   |     |     |      |      |      |
| 125                        | 1.2 μF | •                     | •   |     |     |     |     |      |      |                       | •   | •   |     |     |      |      |      |
| 155                        | 1.5 μF | •                     | •   |     |     |     |     |      |      |                       | •   |     |     |     |      |      |      |
| 185                        | 1.8 μF | •                     |     |     |     |     |     |      |      |                       | •   |     |     |     |      |      |      |
| 225                        | 2.2 μF |                       |     |     |     |     |     |      |      |                       |     |     |     |     |      |      |      |

**Notes**


• RoHS-compliant

<sup>(1)</sup> See soldering recommendations within this data book, or visit: [www.vishay.com/doc?45034](http://www.vishay.com/doc?45034)




## COG (NP0) CAPACITORS - TYPICAL PARAMETERS


### TEMPERATURE COEFFICIENT OF CAPACITANCE

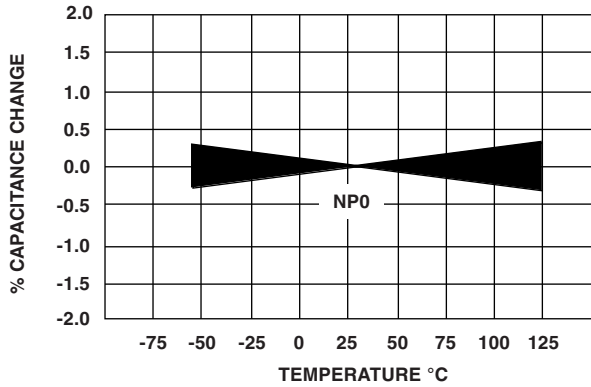


### MIN. INSULATION RESISTANCE VS. TEMPERATURE

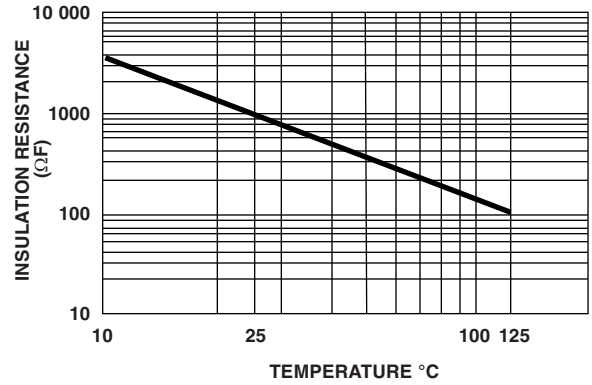

### AGING RATE

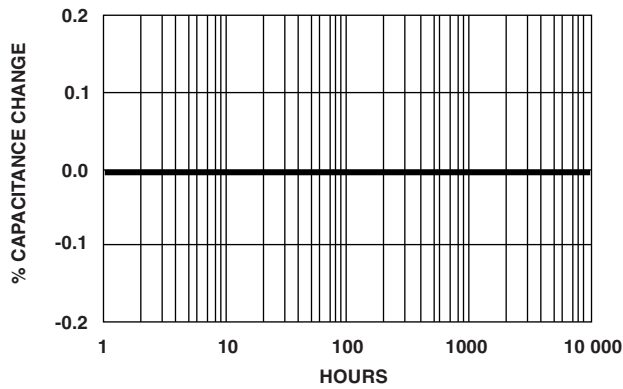


### VOLTAGE COEFFICIENT OF CAPACITANCE

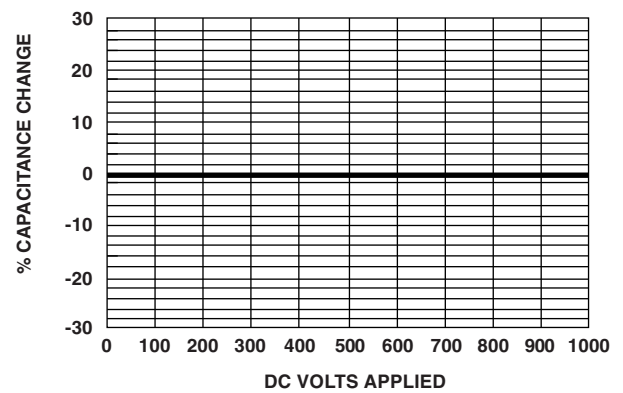




### X7R DIELECTRIC - TYPICAL PARAMETERS


#### RATED VOLTAGE VS. TEMPERATURE

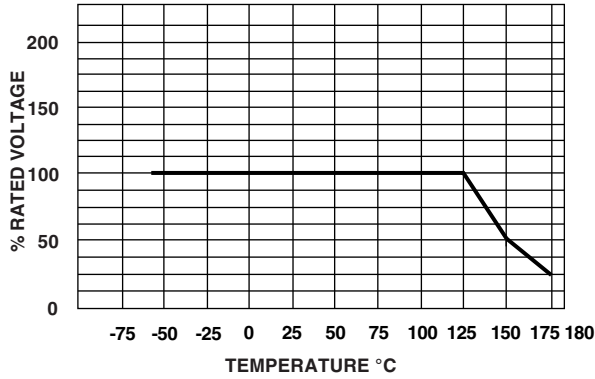


#### DISSIPATION FACTOR VS. TEMPERATURE

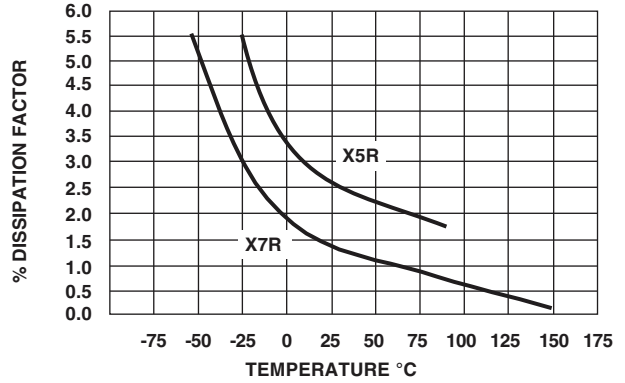


#### VOLTAGE COEFFICIENT OF CAPACITANCE

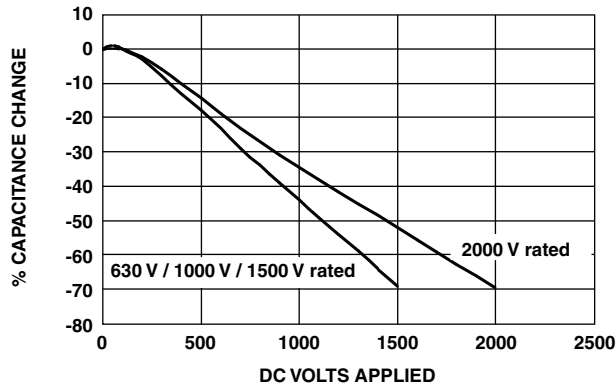


#### DISSIPATION FACTOR VS. VOLTAGE

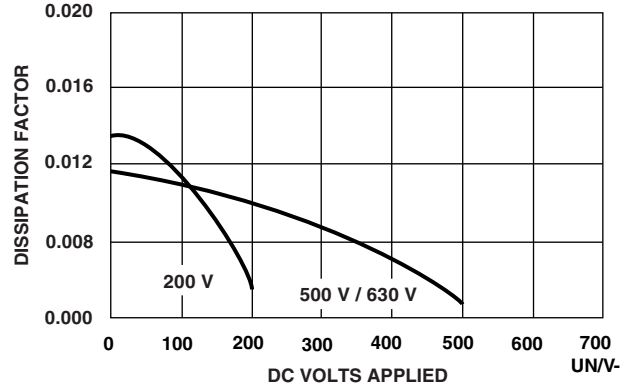




#### IMPEDANCE VS. FREQUENCY 500 V / 630 V

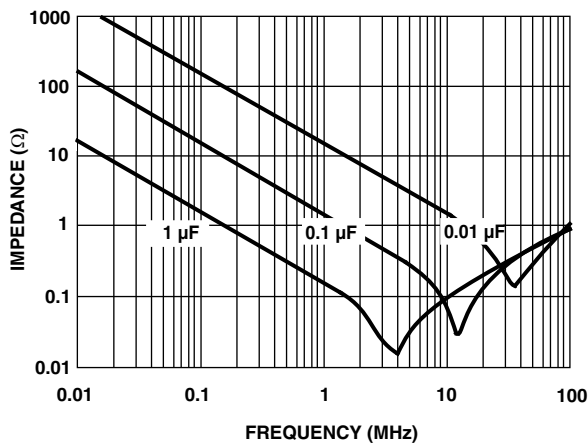


#### IMPEDANCE VS. FREQUENCY 2000 V

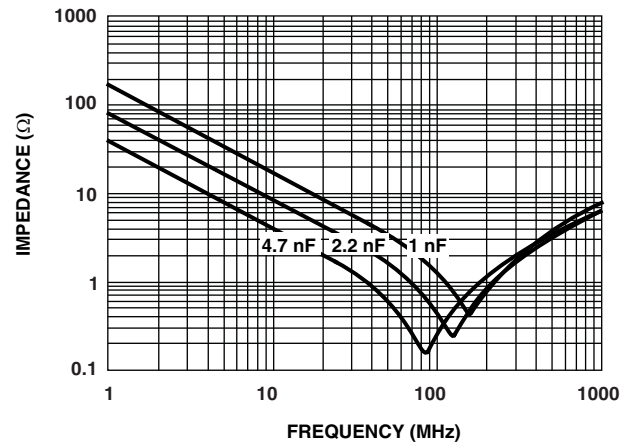

## X7R DIELECTRIC - TYPICAL PARAMETERS

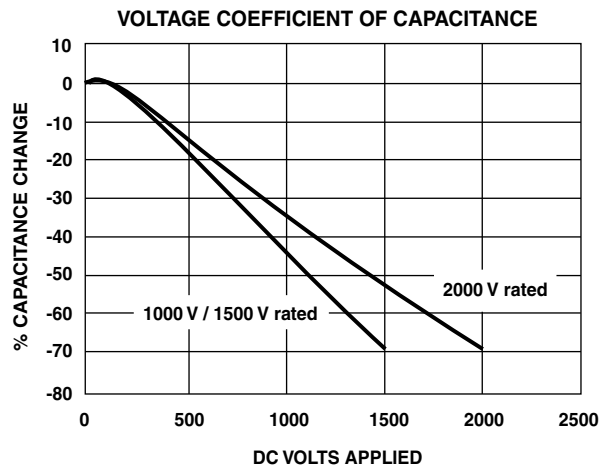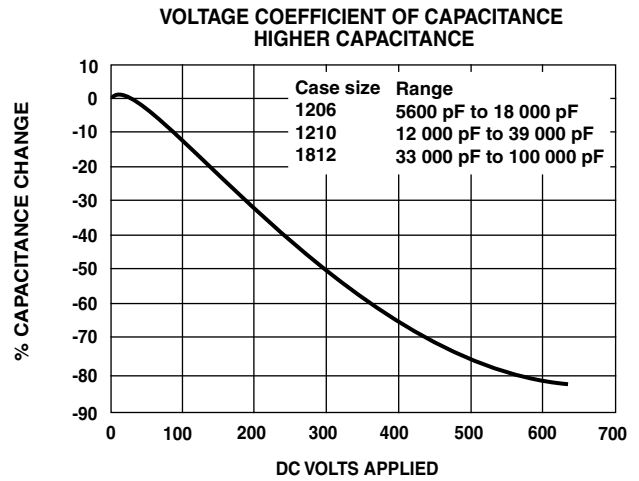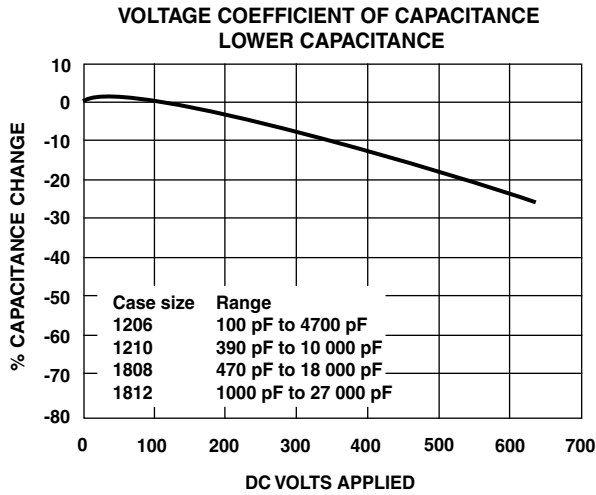

Cracking due to board flexure is a common failure mode for MLCC's. Using an open mode design reduces the risk of a short circuit by increasing the margin between the terminal and the electrodes.  $d2 > d1$ , therefore the same size crack does not cause a short in the open mode design.

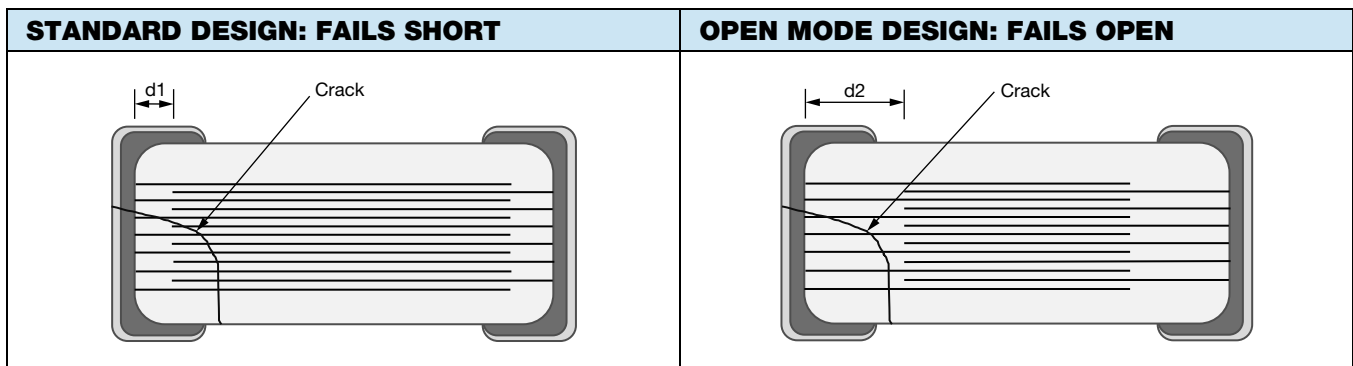



### BOARDFLEX SENSITIVE APPLICATIONS - SOLUTION

A predominant failure mode in multilayer ceramic chip capacitors is cracking caused by board flexure. Cracks can then create a path for current to pass from one electrode through the dielectric to an opposing electrode or from the terminations at one end of the MLCC through the dielectric to an opposing electrode. This may subsequently result in capacitance loss, leakage - low Insulation Resistance (IR) - and / or more seriously, high current shorts. A short circuit condition in the surface mounted capacitors can cause further failures of downstream components. Vishay's Open Mode Design Capacitors (VJ OMD - Cap. series) reduce the risk of these destructive conditions through MLCC designs that prevent board flexure cracks reaching the opposing electrode.

VJ OMD - Cap. MLCCs reduce the risk of early field failures associated with board flex cracks. However, it is important to note that even in the open mode designs the presence of flexure related cracks can cause capacitance loss leading to localized stresses on the parts. eventually, depending on the application environment, including such factors and high voltage pulse frequency and thermal cycling this may lead to internal breakdown of the component.

### POLYMER TERMINATION

Polymer termination provides additional protection against board flexure damage by absorbing greater mechanical and thermal stresses. Components can be packaged, transported, stored and handled the same standard terminated product. Wave and reflow soldering of MLCC does not require modification to equipment and / or process. Polymer termination greatly reduces the risk of mechanical cracking however it does not completely eliminate.
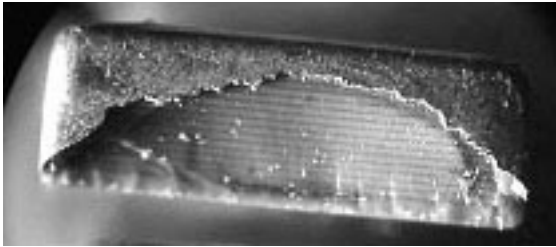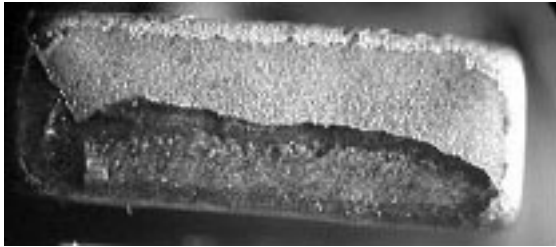
| STANDARD TERMINATION   | OMD CAP PLUS POLYMER TERMINATION  |
|--|---|
| Exposed Electrodes = Electrical Short  | No Exposed Electrodes = No Electrical Short   |
|  |  |

| STANDARD PACKAGING QUANTITIES (1)(2)(3) |           |                                     |                                 |                                     |                                 |
|---|-----------|-------------------------------------|---------------------------------|-------------------------------------|---------------------------------|
| CASE CODE                               | TAPE SIZE | 7" REEL QUANTITIES                  |                                 | 11 1/4" AND 13" REEL QUANTITIES     |                                 |
|   |           | PAPER TAPE PACKAGING CODE "C" / "O" | PLASTIC TAPE PACKAGING CODE "T" | PAPER TAPE PACKAGING CODE "P" / "I" | PLASTIC TAPE PACKAGING CODE "R" |
| 0805 (4)(5)                             | 8 mm      | 3000                                | 3000                            | 10 000                              | 10 000                          |
| 1206 (4)                                | 8 mm      | n/a                                 | 2500 / 3000                     | n/a                                 | 9000 / 10 000                   |
| 1210 (4)                                | 8 mm      | n/a                                 | 2000 / 2500 / 3000              | n/a                                 | 9000 / 10 000                   |
| 1808 (4)                                | 12 mm     | n/a                                 | 2000                            | n/a                                 | 10 000                          |
| 1812 (4)                                | 12 mm     | n/a                                 | 1000                            | n/a                                 | 4000                            |
| 1825                                    | 12 mm     | n/a                                 | 500                             | n/a                                 | 4000                            |
| 2220                                    | 12 mm     | n/a                                 | 1000                            | n/a                                 | n/a                             |
| 2225                                    | 12 mm     | n/a                                 | 500                             | n/a                                 | n/a                             |

#### Notes

- (1) Vishay Vitramon uses embossed plastic, and punch paper carrier tapes. Paper tape is not available for case sizes  $\geq 1206$  or for component thickness  $> 0.035$ " (0.89 mm)
- (2) Reference: EIA standard RS 481 - "Taping of Surface Mount Components for Automatic Placement"
- (3) n/a = not available
- (4) Packaging code "C" / "O", "P" / "I" and lower quantities can depend from product thickness
- (5) Polymer termination, code "B", only available in plastic tape "T" / "R"

| STORAGE AND HANDLING CONDITIONS  |
|--|
| <p>(1) Store the components at 5 °C to 40 °C ambient temperature and <math>\leq 70</math> % relative humidity conditions.</p> <p>(2) The product is recommended to be used within a time-frame of 2 years after shipment.<br/>Check solderability in case extended shelf life beyond the expiry date is needed.</p> <p>Precautions:</p> <ol style="list-style-type: none"> <li>a. Do not store products in an environment containing corrosive elements, especially where chloride gas, sulfide gas, acid, alkali, salt or the like are present. This may cause corrosion or oxidization of the terminations, which can easily lead to poor soldering.</li> <li>b. Store products on the shelf and avoid exposure to moisture or dust.</li> <li>c. Do not expose products to excessive shock, vibration, direct sunlight and so on.</li> </ol> |



## Solder Pad Dimensions for Vishay Surface-Mount Multilayer Ceramic Chip Capacitors

| DIMENSIONS in millimeters |                     |      |                     |
|---------------------------|---------------------|------|---------------------|
|                           |                     |      |                     |
| CASE CODE                 | A                   | B    | C                   |
| 0402                      | 0.50                | 0.50 | 0.40                |
| 0505                      | 1.35                | 1.00 | 0.60                |
| 0603                      | 0.90                | 1.00 | 1.00 <sup>(3)</sup> |
| 0805                      | 1.30                | 1.20 | 1.00                |
| 1111                      | 2.90                | 1.30 | 1.75                |
| 1206                      | 1.80                | 1.20 | 2.10                |
| 1210                      | 2.80                | 1.30 | 1.90                |
| 1808                      | 2.40                | 1.50 | 3.00                |
| 1812                      | 3.60                | 1.50 | 3.00                |
| 1825                      | 6.50                | 1.50 | 3.00                |
| 2008                      | 2.70                | 1.50 | 4.08                |
| 2220                      | 5.50 <sup>(4)</sup> | 1.50 | 4.20                |
| 2225                      | 6.50                | 1.50 | 4.20                |
| 2525                      | 6.60                | 1.50 | 4.50                |
| 3040                      | 10.80               | 2.00 | 5.50                |
| 3640                      | 10.80               | 2.00 | 7.00                |
| 3838                      | 10.20               | 2.00 | 7.50                |
| 4044                      | 12.30               | 2.00 | 8.00                |

### Notes

- (1) For safety capacitors and voltages above 3000 V, corner rounding (R) of 0.5 mm is recommended to suppress arcing
- (2) Add a 1 mm slot in PCB between pads to allow cleaning and coating under MLCC
- (3) For VJ HiFREQ Series, this dimension is 0.6 mm
- (4) For safety capacitors, the A dimension should be 5.80 mm



## PRINTED CIRCUIT BOARD PCB DESIGN CONSIDERATIONS FOR HIGH VOLTAGE SURFACE-MOUNT MLCCS

Special assembly process and design considerations should be employed for today's high voltage rating MLCCs. As case sizes remain the same and voltage ratings increase, MLCC manufacturers must design, evaluate, and qualify their capacitors using methods that reduce the occurrence of corona discharge and arcover events. To meet similar capability in high voltage applications, users should employ similar cautionary design and assembly methods.

### MLCC PAD LAYOUT

A capacitor's arcover inception point can degrade due to factors such as the MLCC termination, PCB pad design, PCB cleanliness, solder flux residue, surface contamination / deposits and environmental conditions. PCB pads and their design affect the air gap distance between the opposing polarities of the MLCC termination. For voltage rating greater than 1500 V<sub>DC</sub> add a corner radius to the inward facing edge of the MLCC pads and as large a gap as possible between the pads. Too small of a pad gap distance will reduce the capacitor's own arcover inception voltage level. Refer to the Figure and Table Figure 1.0, MLCC Pad Layout and Table 1.0, Vishay MLCC Solder Pad Dimensions for the recommended MLCC solder pad dimensions.

### SLOT OR TRENCH BETWEEN PADS

PCB assembly can deposit dust, trap solder balls, or flux residue underneath the capacitors. These contaminants will reduce conductive clearances and the arcover inception level. Assembly methods must include a final PCB cleaning process. A slot or trench can be cut into the PCB in between the pads to allow cleaners to penetrate underneath the MLCC. The slot will also allow conformal or epoxy coatings to flow underneath the MLCC and build an insulative barrier between pads. Refer to Figure 1.0 MLCC Pad Layout for slot reference location.

### COATING PRINTED CIRCUIT BOARD

Coating a printed circuit board with materials such as acrylic, silicone and urethane resins provide a protective dielectric barrier that is non-conductive and will enhance the resistance to arcing. Various processes exist which include dipping, brushing, and spaying. Optimal performance will come from coating the MLCC on all sides, top and bottom. The PCB slot in between the pads should extend slightly beyond the width of the MLCC. Refer to Figure 1.0 MLCC Pad Layout for slot reference location.



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View VJ1812Y104JBEAT4X on WIN SOURCE](#)

 [Vishay Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management