



**THE DATASHEET OF
AE2575NS2184**





Electrical specifications

Notch Center Frequency: 2575 MHz
Notch Passband: 2550 – 2600 MHz
Notch Rejection: 50 dB Min
Low Side Passband: 80-2085 MHz
High Side Passband: 2615 – 6000 MHz
Passband Insertion Loss: 2.2 dB Max
VSWR: 1.8
Impedance: 50 Ω
Power Handling: 20 Watt (CW), 100W (Peak)

Mechanical


Connector Type: SMA Female
Mounting: Threaded Mounting Holes
Dimensions: 7.45 x 2.09 x 0.87 in

Environmental

Operating Temperature: -20 to +60° C
Storage Temperature: -50 to +90° C

Size Tolerance: As Below (+/- 0.3m)
 Rev. A (06-27-2017)

Outline Drawing:

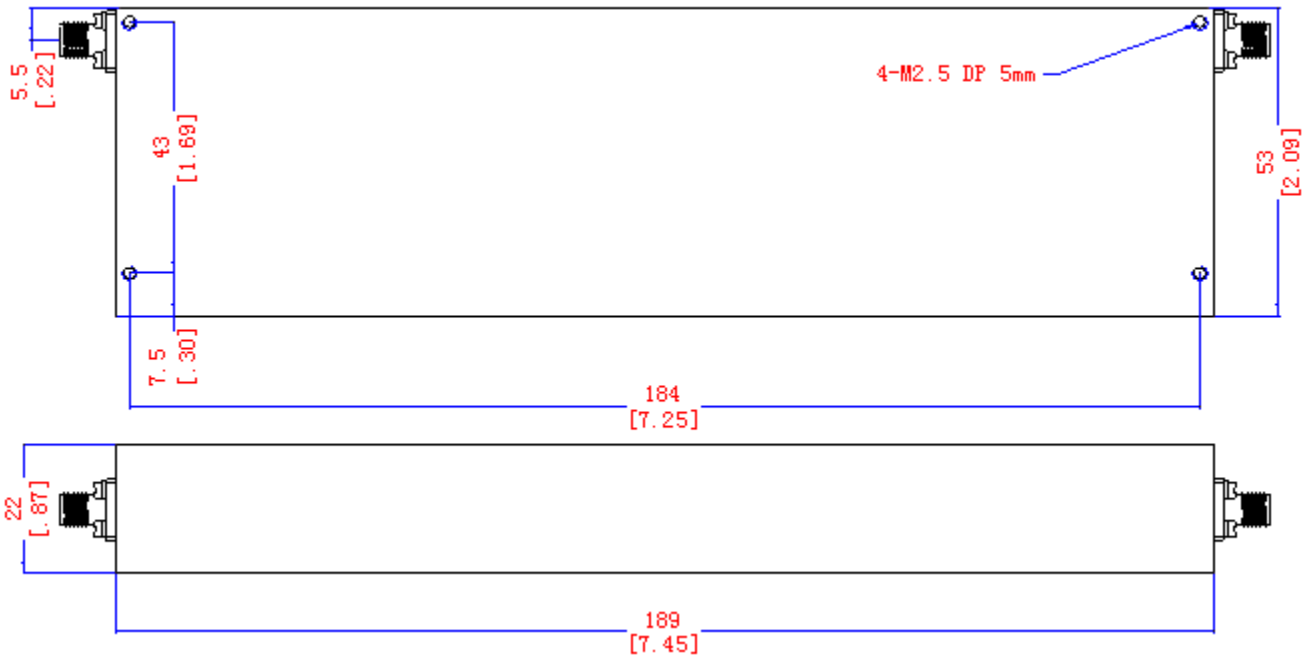

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View AE2575NS2184 on WIN SOURCE](#)
- ⊖ [Anatech Electronics Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management