



THE DATASHEET OF MRT 80-BULK



80mA - 400mA EOL – Last Buy Date is July 31, 2024
 No replacements for these ratings

Type MRT

Time Lag Radial Lead Micro Fuse Series

HF  MRT Series

RoHS Compliant

Description

Sub-miniature, time lag type, 250V rated fuses designed, approved and complied with IEC 60127-3, standard sheet 4.



Features


- Time lag (250V AC)
- Meet IEC standard 60127-3, sheet 4
- Wide operating temperature range
- Bulk and Tape & Reel packing available
- Full compliance with EU Directive 2011/65/EU and amending directive 2015/863
- Halogen Free
- Lead Free
- AEC-Q Compliant
- Meets Bel automotive qualification*
- * - Largely based on internal AEC-Q test plan

Applications

Provide individual protection for components or internal circuits.



- Power supplies
- Battery chargers
- Consumer electronics
- Adapter
- Industrial controllers

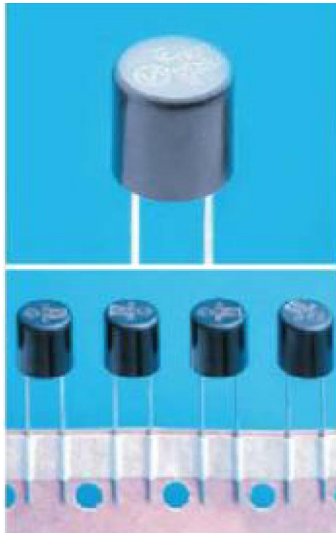LEAD FREE = 
 HALOGEN FREE = 



AEC-Q Compliant






Physical Specifications

Materials	Base and Cover : Black thermoplastic, UL 94-V0
	Pins : 100% Matte Tin Plated Copper
Marking	On Fuse :
	"bel", "T", "Current Rating", "250V" & "Appropriate Safety Logos"
	On Label :
	"bel", "MRT", "T", "Current Rating", "Voltage Rating", "Interrupting Rating", "Appropriate Safety Logos" and "  ", "  " (China RoHS compliant).

Electrical Characteristics (IEC-127-3 STANDARD SHEET 4) Safety Agency Approvals

Rated Current	1.5In		2.1In		2.75In		4In		10In	
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
80mA to 6.3A inclusive	1	2	400	10	150	3	20	150	20	150
Above 6.3A	1	5	1000	20	150	3	20	150	20	150
	hour	min.	ms	sec	ms	sec	ms	ms	ms	ms

In clause 9.2, the test voltage for MRT ratings from 80mA to 6.3A is 64VDC.

Safety Agency	Safety Agency Certificate	Ampere Rating/ Voltage Rating	Ampere Range / Volt @ I.R. ability*
	139937	80mA-10A/ 250V ac	80mA-800mA/250V ac@35A 1A-4A/250V ac@100A
	40001000		5A-10A/250V ac@100A
	LR39772		80mA-6.3A/250V ac@50A
	E506667		80mA-10A/277V ac@100A
	Self-declaration No: 2020970207000131		80mA-10A/250V ac@35A or 10 In whichever is greater
*I.R.= Interrupting Rating = Short Circuit Rating(Amps)			

Type MRT

Environmental Specifications

Shock Resistance	MIL-STD-202G, Method 213B, Test Condition 1 (100 G's peak for 6 milliseconds; Sawtooth waveform)
Vibration Resistance	MIL-STD-202G, Method 201A (10-55 Hz X 3 axis / no load).
Salt Spray Resistance	MIL-STD-202G, Method 101E, Test Condition B (48 hrs.).
Solderability	MIL-STD-202G, Method 208H
Resistance to solder Heat	MIL-STD-202G, Method 210F, Test Condition C. Top Side. (260°C, 20 sec)
Moisture Resistance	MIL-STD-202G, Method 202G, Method 106G
Operating Temperature	-55°C to +125°C

High temperature storage	MIL-STD-202 Method 108
Temperature cycling	JESD22 Method JA-104, Test Condition B
Biased humidity	MIL-STD-202 Method 103, 85C/85% RH with 10% operating power for 1000 hrs.
Operational life	MIL-STD-202 Method 108, Test Condition D
Resistance to solvents	MIL-STD-202 Method 215
Mechanical shock	MIL-STD-202 Method 213, Test Condition C
Vibration	MIL-STD-202 Method 204
Resistance to soldering heat	MIL-STD-202 Method 210, Test condition B
Thermal shock	MIL-STD-202 Method 107
Solderability	J-STD-002
Board flex(SMD)	AEC-Q200-005
Terminal strength	AEC-Q200-006
Electrical characterization	3 temperature electrical

Electrical Specifications

Catalog Number	Ampere Rating	Typical Cold Resistance (ohms)	Volt-drop @100% In (Volt) max.	Voltage and Interrupting Ratings	Melting I²T <10 mSec (A² Sec)	Melting I²T @10 In (A² Sec)	Maximum Power Dissipation (W)	Agency Approvals				
								UL	CS	UL	VDE	CCC
MRT 80	80mA	3.5	0.398	See Table of Safety Approvals on Page 1 for Voltage and associated Interrupting Ratings	0.01	0.01	0.10	Y	Y	Y		Y
MRT 100	100mA	2.3	0.329		0.02	0.02	0.11	Y	Y	Y		Y
MRT 125	125mA	1.6	0.295		0.04	0.04	0.13	Y	Y	Y		Y
MRT 160	160mA	1.1	0.252		0.07	0.06	0.15	Y	Y	Y		Y
MRT 200	200mA	0.73	0.200		0.12	0.11	0.17	Y	Y	Y		Y
MRT 250	250mA	0.55	0.188		0.38	0.41	0.19	Y	Y	Y		Y
MRT 315	315mA	0.36	0.152		0.60	0.66	0.22	Y	Y	Y		Y
MRT 400	400mA	0.25	0.129		0.90	1.0	0.25	Y	Y	Y		Y
MRT 500	500mA	0.18	0.114	See Table of Safety Approvals on Page 1 for Voltage and associated Interrupting Ratings	1.5	1.7	0.29	Y	Y	Y		Y
MRT 630	630mA	0.13	0.109		2.4	2.6	0.33	Y	Y	Y		Y
MRT 800	800mA	0.095	0.103		3.7	4.2	0.38	Y	Y	Y		Y
MRT 1	1A	0.070	0.090		6	7	0.44	Y	Y	Y		Y
MRT 1.25	1.25A	0.053	0.087		9	11	0.51	Y	Y	Y		Y
MRT 1.6	1.6A	0.038	0.085		15	17	0.58	Y	Y	Y		Y
MRT 2	2A	0.029	0.084		23	27	0.67	Y	Y	Y		Y
MRT 2.5	2.5A	0.022	0.084		37	43	0.77	Y	Y	Y		Y
MRT 3.15	3.15A	0.017	0.074		58	69	0.88	Y	Y	Y		Y
MRT 4	4A	0.013	0.073		92	110	1.02	Y	Y	Y		Y
MRT 5	5A	0.010	0.073		145	175	1.17	Y	Y		Y	Y
MRT 6.3	6.3A	0.008	0.072		230	281	1.34	Y	Y		Y	Y
MRT 8	8A	0.006	0.073		280	350	2.40	Y			Y	Y
MRT 10	10A	0.0042	0.070		300	400	1.60	Y			Y	Y

Consult manufacturer for other ratings

EOL – Last Buy Date is July 31, 2024




Specifications subject to change without notice

Bel Fuse Inc.
 300 Executive Drive, Suite 300,
 West Orange, NJ 07052 USA


+1 201.432.0463
 Bel.US.CS@belf.com
belfuse.com/circuit-protection

Type MRT

Temperature Derating Curve

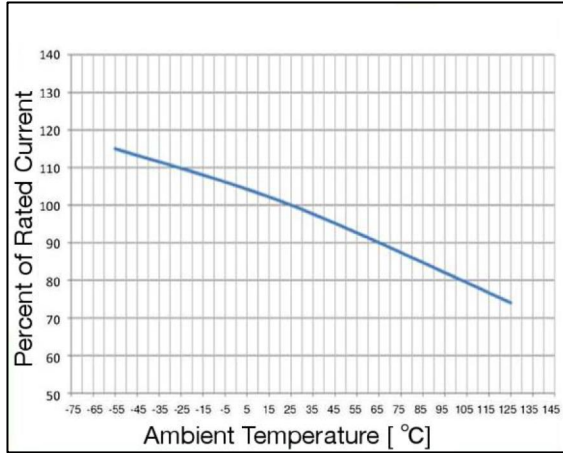


Average Time Current Curve

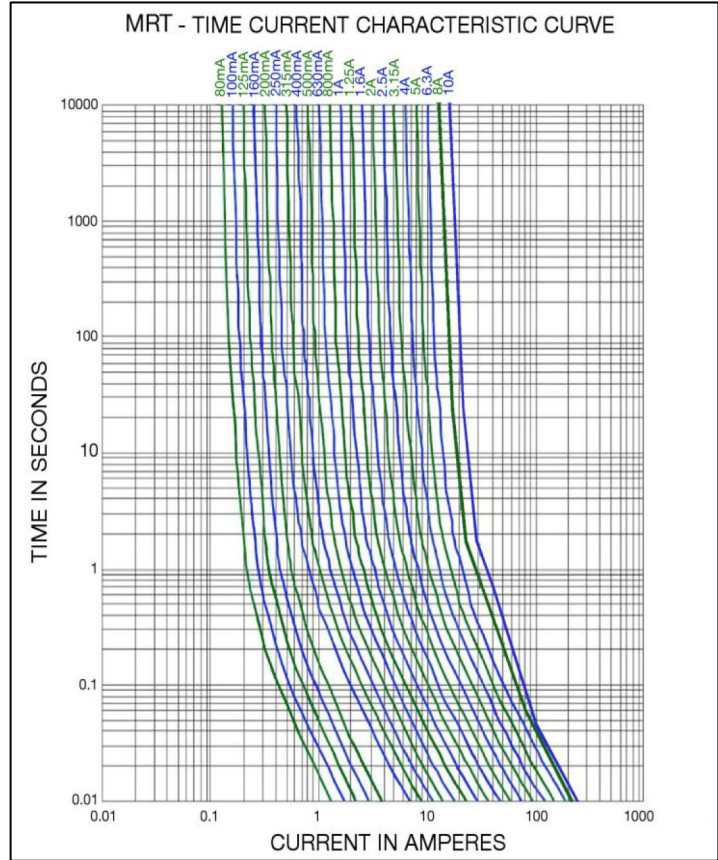

Soldering Parameters

Lead-free Wave Soldering Profile	
Wave Soldering Parameter	
Average ramp-up rate	200°C / second
Heating rate during preheat	typical 1 - 2°C / second Max 4°C / second
Final preheat temperature	within 125°C of soldering temperature
Peak temperature T _p	260°C
Time within +0°C / -5°C of actual peak temperature	10 seconds
Ramp-down rate	5°C / second max.

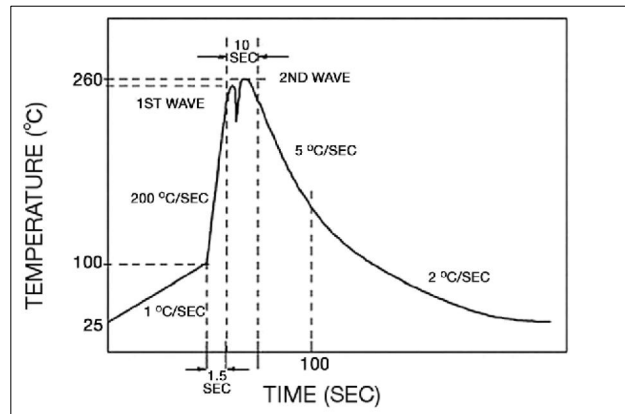

Specifications subject to change without notice

Bel Fuse Inc.
 300 Executive Drive, Suite 300,
 West Orange, NJ 07052 USA

+1 201.432.0463
 Bel.US.CS@belf.com
belfuse.com/circuit-protection

Type MRT

Fuse FGNO Explanation


0692 - [XXXX] X XX

0692=MRT; [XXXX]=Ampere Rating; XX=See Ordering Information as below


Fraction	Decimal	Milliamps	Bel FGNO[XXXX]
8/100	0.080	80	0080
1/10	.100	100	0100
1/8	.125	125	0125
	.160	160	0160
2/10	.200	200	0200
1/4	.250	250	0250
	.315	315	0315
4/10	.400	400	0400
1/2	.500	500	0500
	.630	630	0630
8/10	.800	800	0800

Fraction	Decimal	Amps	Bel FGNO[XXXX]
	1.0	1	1000
1-1/4	1.25	1.25	1250
	1.60	1.6	1600
	2.0	2	2000
2-1/2	2.5	2.5	2500
	3.15	3.15	3150
	4.0	4	4000
	5.0	5	5000
	6.3	6.3	6300
	8.0	8.0	8000
	10.0	10.0	9100

Mechanical Dimensions

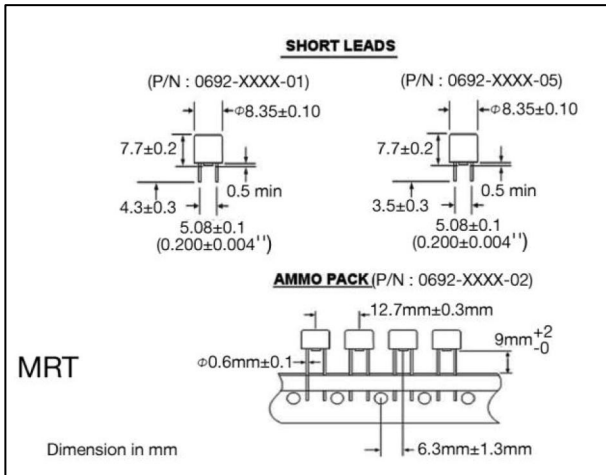

Ordering Information

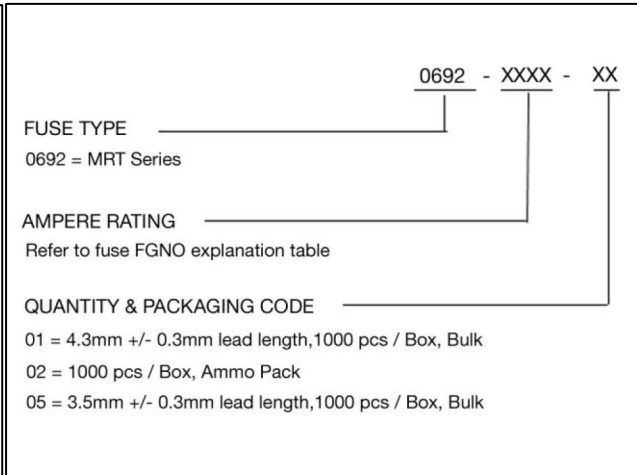

Packaging

Packaging Option	Packaging Specification	Quantity	Packaging Code
Bulk / bag, 1000 / box	N/A	1000	01 , 05
12.7 mm pitch, On Tape / box	IEC-286-2	1000	02





Specifications subject to change without notice

Bel Fuse Inc.
 300 Executive Drive, Suite 300,
 West Orange, NJ 07052 USA

+1 201.432.0463
 Bel.US.CS@belf.com
belfuse.com/circuit-protection

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View MRT 80-BULK on WIN SOURCE](#)
-  [Bel Fuse Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management