



**THE DATASHEET OF
DF3A6.8FUT1G**



DF3A6.8FUT1

Preferred Device

Zener ESD Protection Diode

Dual Common Anode Zeners for ESD Protection

These dual monolithic silicon zener diodes are designed for applications requiring transient overvoltage protection capability. They are intended for use in voltage and ESD sensitive equipment such as computers, printers, business machines, communication systems, medical equipment and other applications. Their dual junction common anode design protects two separate lines using only one package. These devices are ideal for situations where board space is at a premium.

Features

- Pb-Free Package is Available
- SC-70 Package Allows Two Separate Unidirectional Configurations
- Low Leakage < 1.0 μ A @ 5.0 V
- Breakdown Voltage: 6.4–7.2 V @ 5.0 mA
- ESD Protection Meeting: 16 kV Human Body Model
30 kV Contact = IEC61000-4-2
- Peak Power: 24 W @ 1.0 ms (Unidirectional), per Figure 1
- Peak Power: 150 W @ 20 μ s (Unidirectional), per Figure 2

Mechanical Characteristics

- Void Free, Transfer-Molded, Thermosetting Plastic Case
- Corrosion Resistant Finish, Easily Solderable
- Package Designed for Optimal Automated Board Assembly
- Small Package Size for High Density Applications

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Steady State Power Dissipation Derate above 25°C (Note 1)	P _D	200 1.6	mW mW/°C
Thermal Resistance Junction-to-Ambient	R _{θJA}	618	°C/W
Operating Junction and Storage Temperature Range	T _J , T _{stg}	- 55 to +150	°C
Peak Power Dissipation @ 1.0 ms (Note 2) @ T _A = 25°C	P _{PK}	20	W
Peak Power Dissipation @ 20 μ s (Note 3) @ T _A = 25°C	P _{PK}	150	W
ESD Discharge MIL STD 883C – Method 3015-6 IEC61000-4-2, Air Discharge IEC61000-4-2, Contact Discharge	V _{PP}	16 30 30	kV



Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Mounted on FR-5 Board = 1.0 X 0.75 X 0.062 in.
2. Non-repetitive pulse per Figure 1.
3. Non-repetitive pulse per Figure 2.




ON Semiconductor®

www.onsemi.com



SC-70/SOT-323
CASE 419
STYLE 4

MARKING DIAGRAM



68 = Specific Device Code
M = Date Code

ORDERING INFORMATION

Device	Package	Shipping†
DF3A6.8FUT1	SC-70	3000/Tape & Reel
DF3A6.8FUT1G	SC-70 (Pb-Free)	3000/Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

Preferred devices are recommended choices for future use and best overall value.


DF3A6.8FUT1

ELECTRICAL CHARACTERISTICS

($T_A = 25^\circ\text{C}$ unless otherwise noted)

UNIDIRECTIONAL (Circuit tied to Pins 1 and 3 or 2 and 3)

Symbol	Parameter
V_{RWM}	Working Peak Reverse Voltage
I_R	Maximum Reverse Leakage Current @ V_{RWM}
V_{BR}	Breakdown Voltage @ I_T
I_T	Test Current
I_F	Forward Current
V_F	Forward Voltage @ I_F
Z_{ZT}	Maximum Zener Impedance @ I_{ZT}
Z_{ZK}	Maximum Zener Impedance @ I_{ZK}

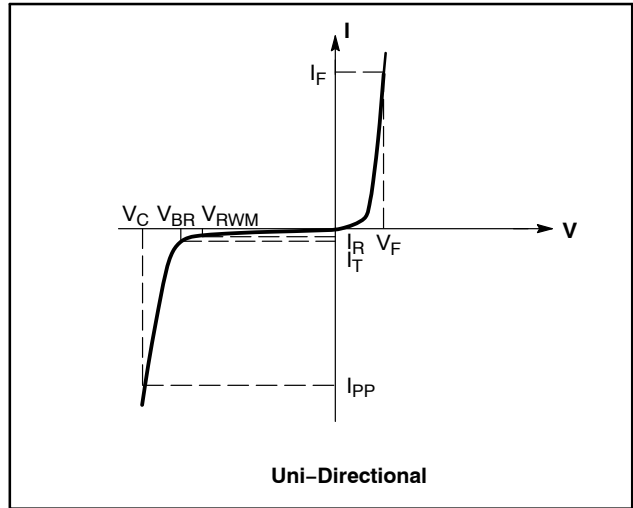

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

UNIDIRECTIONAL (Circuit tied to Pins 1 and 3 or 2 and 3)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Forward Voltage	V_F	$I_F = 10 \text{ mA}$		0.8	0.9	V
Zener Voltage (Note 4)	V_Z	$I_{ZT} = 5 \text{ mA}$	6.4	6.8	7.2	V
Operating Resistance (Note 5)	Z_{ZK}	$I_{ZK} = 0.5 \text{ mA}$			200	Ω
	Z_{ZT}	$I_{ZT} = 5 \text{ mA}$			50	Ω
Reverse Current	I_{R1}	$V_{RWM} = 5 \text{ V}$			0.5	μA
Clamping Voltage	V_C	$I_{PP} = 2.0 \text{ A}$ (Figure 1)			9.6	V
		$I_{PP} = 9.37 \text{ A}$ (Figure 2)			16	V
ESD Protection	Human Body Model (HBM) Contact – IEC61000-4-2 Air Discharge				16	kV
					30	
					30	

4. V_Z measured at pulse test current I_{ZT} at an ambient temperature of 25°C .

5. Z_{ZT} and Z_{ZK} is measured by dividing the AC voltage drop across the device by the AC current supplied. AC frequency = 1.0 kHz.

TYPICAL CHARACTERISTICS

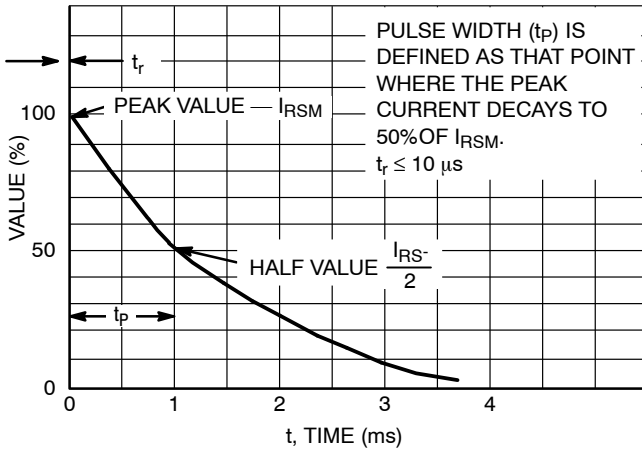


Figure 1. 10 × 1000 μs Pulse Waveform

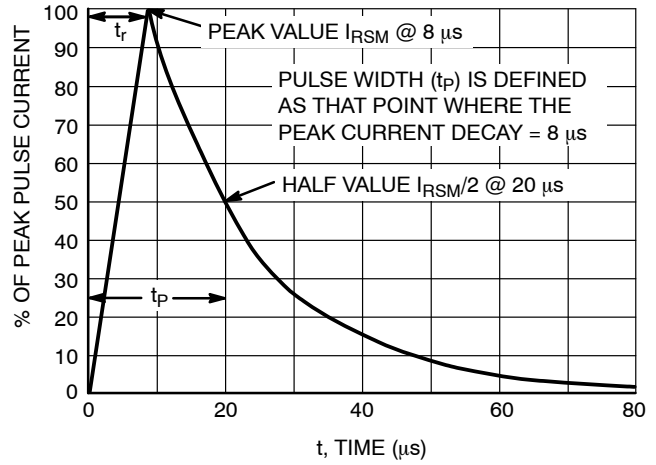


Figure 2. 8 × 20 μs Pulse Waveform

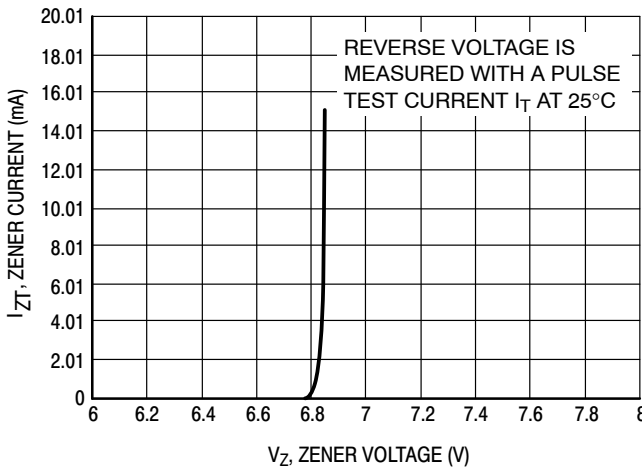


Figure 3. Zener Voltage vs. Zener Current

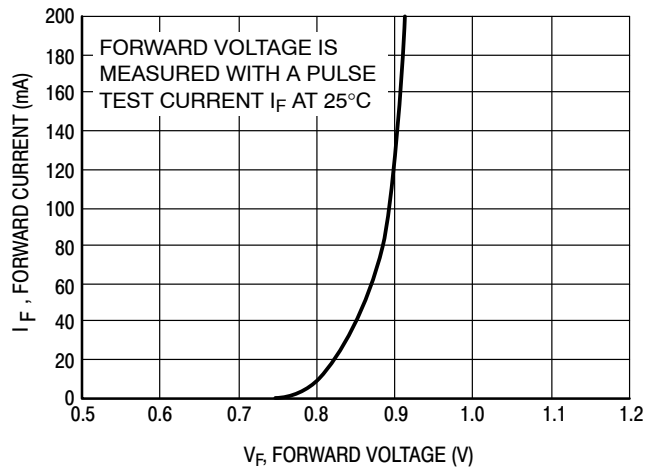


Figure 4. Forward Voltage vs. Forward Current

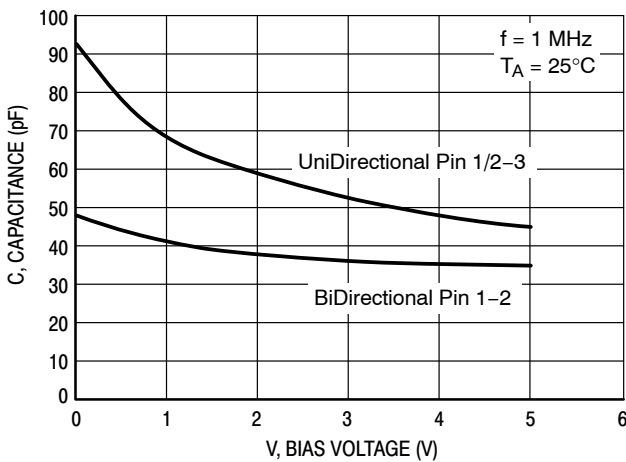


Figure 5. Capacitance vs. Bias Voltage


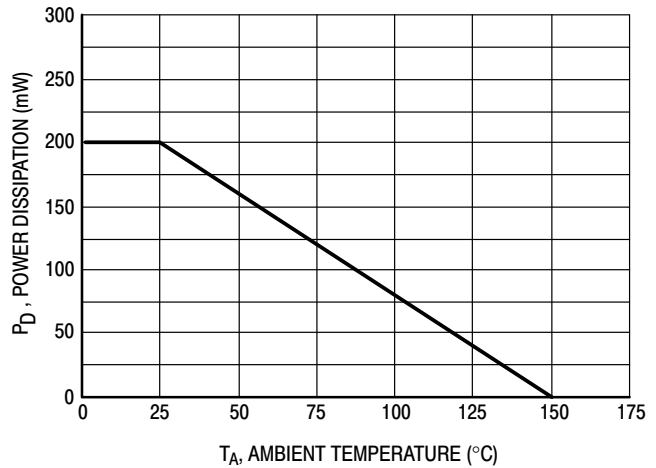


Figure 6. Steady State Power Derating Curve

DF3A6.8FUT1

PACKAGE DIMENSIONS

SC-70 (SOT-323)
CASE 419-04
ISSUE L

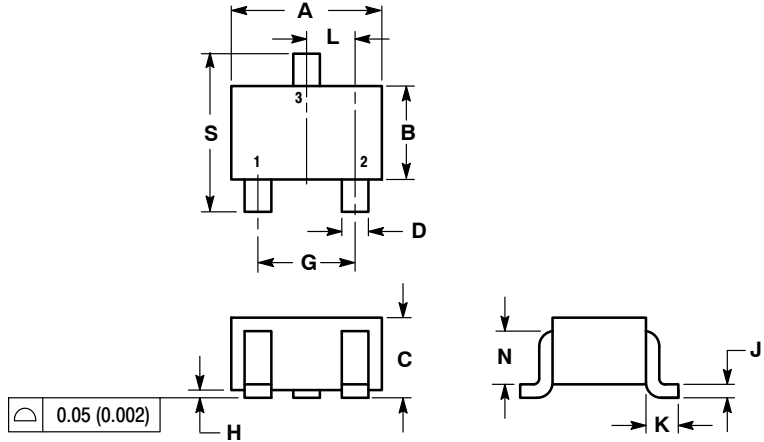

NOTES:


1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.071	0.087	1.80	2.20
B	0.045	0.053	1.15	1.35
C	0.032	0.040	0.80	1.00
D	0.012	0.016	0.30	0.40
G	0.047	0.055	1.20	1.40
H	0.000	0.004	0.00	0.10
J	0.004	0.010	0.10	0.25
K	0.017 REF		0.425 REF	
L	0.026 BSC		0.650 BSC	
N	0.028 REF		0.700 REF	
S	0.079	0.095	2.00	2.40

STYLE 4:

- PIN 1: CATHODE
- CATHODE
- ANODE

SOLDERING FOOTPRINT*

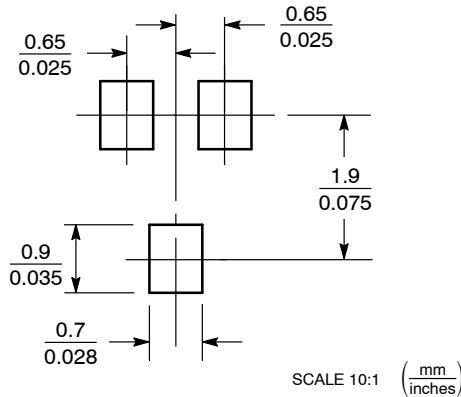

*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor
19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free
USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View DF3A6.8FUT1G on WIN SOURCE](#)

 [ON Semiconductor](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management