




**THE DATASHEET OF  
FC0402E50R0BTBST1**



## High Frequency (Up to 40 GHz) Resistor, Thin Film Surface Mount Chip

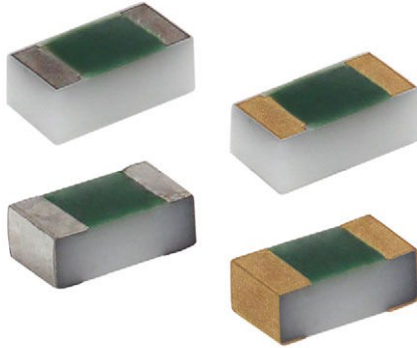

### LINKS TO ADDITIONAL RESOURCES



FC series chip resistors are designed with low internal reactance. They function as almost pure resistors on a very high range of frequencies. The specialized laser edge trimming allows for precision tolerances to 0.1 %.

### FEATURES

- Small standard size 0402 case size
- Edge trimmed block resistors
- High purity alumina substrate
- Ohmic range (10  $\Omega$  to 1000  $\Omega$ )
- Small internal reactance (< 10 m $\Omega$ )
- Low TCR (down to  $\pm 25$  ppm/ $^{\circ}$ C)
- Epoxy bondable termination available
- Material categorization: for definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)



**RoHS\***  
Available

**HALOGEN  
FREE**  
Available

**GREEN  
(5-2008)**  
Available

### Note

\* This datasheet provides information about parts that are RoHS-compliant and / or parts that are non RoHS-compliant. For example, parts with lead (Pb) terminations are not RoHS-compliant. Please see the information / tables in this datasheet for details

### APPLICATIONS

- Low noise amplifiers
- Attenuation
- Line termination

| STANDARD ELECTRICAL SPECIFICATIONS |                                                           |                                       |
|------------------------------------|-----------------------------------------------------------|---------------------------------------|
| TEST                               | SPECIFICATIONS                                            | CONDITIONS                            |
| Material                           | Passivated nichrome                                       | -                                     |
| Resistance Range                   | 10 $\Omega$ to 1000 $\Omega$                              | Case size dependent                   |
| TCR: Absolute                      | $\pm 25$ ppm/ $^{\circ}$ C to $\pm 100$ ppm/ $^{\circ}$ C | -55 $^{\circ}$ C to +125 $^{\circ}$ C |
| Tolerance: Absolute                | $\pm 0.1$ % to $\pm 5.0$ %                                | +25 $^{\circ}$ C                      |
| Stability: Absolute                | $\Delta R \pm 0.02$ %                                     | 2000 h at 70 $^{\circ}$ C             |
| Stability: Ratio                   | -                                                         | -                                     |
| Voltage Coefficient                | 0.1 ppm/V                                                 | -                                     |
| Working Voltage                    | 30 V to 75 V                                              | -                                     |
| Operating Temperature Range        | -55 $^{\circ}$ C to +155 $^{\circ}$ C                     | -                                     |
| Storage Temperature Range          | -55 $^{\circ}$ C to +155 $^{\circ}$ C                     | -                                     |
| Noise                              | < -35 dB                                                  | -                                     |
| Shelf Life Stability: Absolute     | $\Delta R \pm 0.01$ %                                     | 1 year at +25 $^{\circ}$ C            |

| COMPONENT RATINGS |                   |                     |                               |
|-------------------|-------------------|---------------------|-------------------------------|
| CASE SIZE         | POWER RATING (mW) | WORKING VOLTAGE (V) | RESISTANCE RANGE ( $\Omega$ ) |
| 0402              | 50                | 30                  | 10 to 1000                    |
| 0505              | 125               | 37                  | 20 to 1000                    |
| 0603              | 125               | 50                  | 10 to 1000                    |
| 0805              | 200               | 50                  | 10 to 1000                    |
| 1005              | 250               | 75                  | 10 to 1000                    |
| 1206              | 330               | 75                  | 10 to 1000                    |




| DIMENSIONS in inches (millimeters) |                                  |                   |                        |                                                  |                        |  |
|------------------------------------|----------------------------------|-------------------|------------------------|--------------------------------------------------|------------------------|--|
| CASE SIZE                          | LENGTH                           | WIDTH W (± 0.005) | THICKNESS T (± 0.0015) | TOP PAD D (± 0.005)                              | BOTTOM PAD E (± 0.005) |  |
| 0402                               | 0.042 ± 0.008<br>(1.067 ± 0.203) | 0.022<br>(0.559)  | 0.015<br>(0.381)       | 0.010<br>(0.254)                                 | 0.010<br>(0.254)       |  |
| 0505                               | 0.055 ± 0.006<br>(1.397 ± 0.152) | 0.050<br>(1.270)  | 0.015<br>(0.381)       | 0.010<br>(0.254)                                 | 0.015<br>(0.381)       |  |
| 0603                               | 0.064 ± 0.006<br>(1.626 ± 0.152) | 0.032<br>(0.813)  | 0.015<br>(0.381)       | 0.012<br>(0.305)                                 | 0.015<br>(0.381)       |  |
| 0805                               | 0.080 ± 0.006<br>(2.032 ± 0.152) | 0.050<br>(1.270)  | 0.015<br>(0.381)       | 0.016 ± 0.008<br>(0.406 ± 0.203)                 | 0.015<br>(0.381)       |  |
| 1005                               | 0.105 ± 0.008<br>(2.667 ± 0.203) | 0.050<br>(1.270)  | 0.015<br>(0.381)       | 0.015<br>(0.381)                                 | 0.015<br>(0.381)       |  |
| 1206                               | 0.126 ± 0.008<br>(3.200 ± 0.203) | 0.063<br>(1.600)  | 0.015<br>(0.381)       | 0.020 + 0.005/- 0.010<br>(0.508 + 0.127/- 0.254) |                        |  |

| MECHANICAL SPECIFICATIONS            |                               |
|--------------------------------------|-------------------------------|
| Resistive Element                    | Passivated nichrome           |
| Substrate Material                   | Alumina                       |
| Terminations                         | Pre-soldered or gold          |
| Lead (Pb)-free Option                | 96.5 % Sn, 3.0 % Ag, 0.5 % Cu |
| Tin/Lead Option                      | Sn63                          |
| Lead (Pb)-free Finish and Tin / Lead | Hot solder dip                |


| GLOBAL PART NUMBER INFORMATION                                               |                                              |                                                  |   |                                                                                                                                                                                                        |                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |           |   |                                                                                                                                                                                                                                                                                                                    |   |   |   |   |   |
|------------------------------------------------------------------------------|----------------------------------------------|--------------------------------------------------|---|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|---|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|---|---|---|---|
| New Global Part Numbering: FC1206E1001BBS                                    |                                              |                                                  |   |                                                                                                                                                                                                        |                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |           |   |                                                                                                                                                                                                                                                                                                                    |   |   |   |   |   |
| F                                                                            | C                                            | 1                                                | 2 | 0                                                                                                                                                                                                      | 6                                                       | E                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 1         | 0 | 0                                                                                                                                                                                                                                                                                                                  | 1 | B | B | T | S |
| F                                                                            | C                                            | 1                                                | 2 | 0                                                                                                                                                                                                      | 6                                                       | K                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 1         | 0 | 0                                                                                                                                                                                                                                                                                                                  | 0 | B | T | B | S |
| GLOBAL MODEL                                                                 | CASE SIZE                                    | TCR CHARACTERISTIC                               |   | RESISTANCE                                                                                                                                                                                             | TOLERANCE                                               | TERMINATION (1, 2 or 3 digits)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |           |   | PACKAGING                                                                                                                                                                                                                                                                                                          |   |   |   |   |   |
| FC                                                                           | 0402<br>0505<br>0603<br>0805<br>1005<br>1206 | E = 25 ppm/°C<br>H = 50 ppm/°C<br>K = 100 ppm/°C |   | The first 3 digits are significant figures and the last digit specifies the number of zeros to follow. "R" designates the decimal point.<br><br>Example:<br>10R0 = 10 Ω<br>1000 = 100 Ω<br>1001 = 1 kΩ | B = 0.1 %<br>D = 0.5 %<br>F = 1 %<br>G = 2 %<br>J = 5 % | <b>T</b> = top sided Au (gold) term Au over Ni epoxy bondable RoHS-compliant - e4<br><b>B</b> = wraparound Sn/Pb solder 63 % Sn/37 % Pb with nickel barrier<br><b>G</b> = wraparound Au over Ni (gold) termination epoxy bondable RoHS-compliant - e4<br><b>TB</b> = top sided Sn/Pb solder 63 % Sn/37 % Pb with nickel barrier<br><b>TBS</b> = top sided lead (Pb)-free solder with nickel barrier RoHS-compliant - e1<br><b>S</b> = wraparound lead (Pb)-free solder 96.5 % Sn/3.0 % Ag/0.5 % Cu RoHS-compliant - e1 |           |   | <b>BS</b> = BULK 100 min., 1 mult.<br><b>WS</b> = WAFFLE 100 min., 1 mult.<br><br><b>TAPE AND REEL</b><br><b>T0</b> = 100 min., 100 mult.<br><b>T1</b> = 1000 min., 1000 mult. (1)<br><b>T3</b> = 300 min., 300 mult.<br><b>T5</b> = 500 min., 500 mult.<br><b>TF</b> = full reel<br><b>TS</b> = 100 min., 1 mult. |   |   |   |   |   |
| Historical Part Number Example: FC1206E1001BBT (for reference purposes only) |                                              |                                                  |   |                                                                                                                                                                                                        |                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |           |   |                                                                                                                                                                                                                                                                                                                    |   |   |   |   |   |
| FC                                                                           | 1206                                         | E                                                |   | 1001                                                                                                                                                                                                   | B                                                       | B                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | T         |   |                                                                                                                                                                                                                                                                                                                    |   |   |   |   |   |
| SERIES                                                                       | CASE SIZE                                    | TCR CHARACTERISTIC                               |   | RESISTANCE                                                                                                                                                                                             | TOLERANCE                                               | TERMINATION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | PACKAGING |   |                                                                                                                                                                                                                                                                                                                    |   |   |   |   |   |

Note  
(1) Preferred packaging code

**TYPICAL HIGH FREQUENCY PERFORMANCE ELECTRICAL MODEL AND TESTING**

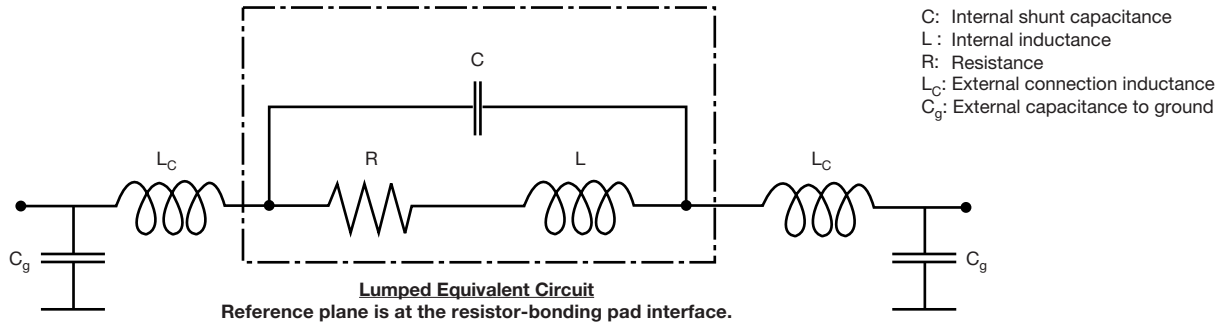


The lumped circuit above was used to model the data at the bonding pad-resistor reference plane. High frequency testing was performed by Modelithics, Inc. on parts mounted to quartz test boards. Quartz test boards were chosen to minimize the contribution of the board effects at high frequencies.

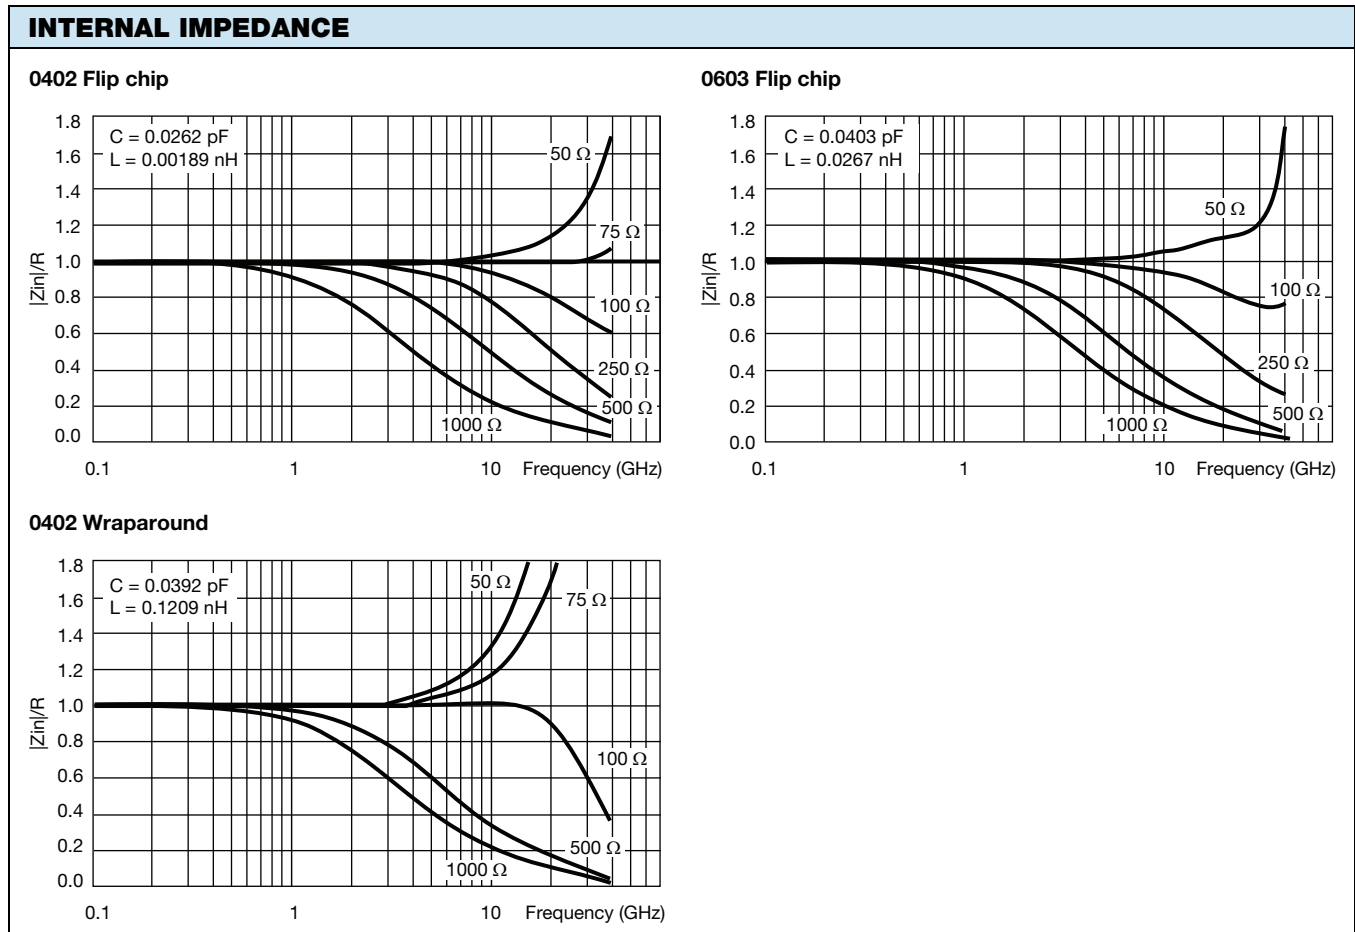





**DERATING CURVE**

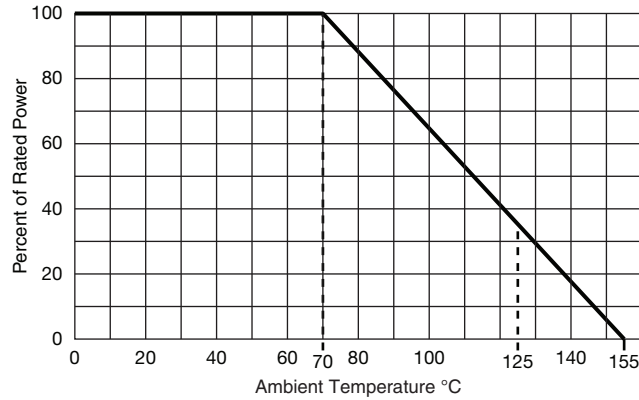

**VSWR FC Series 0402 size 50 Ω**

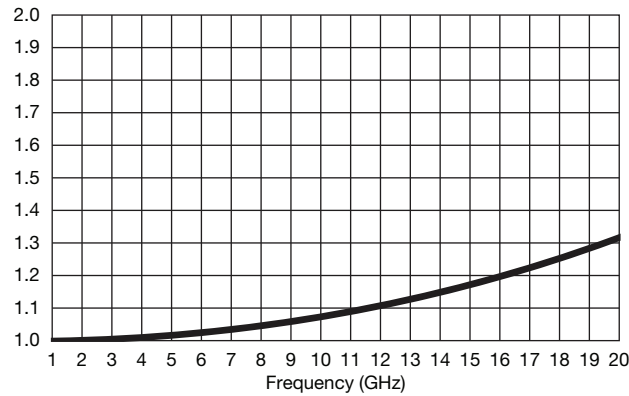

**VSWR FC Series 0402 size 100 Ω**

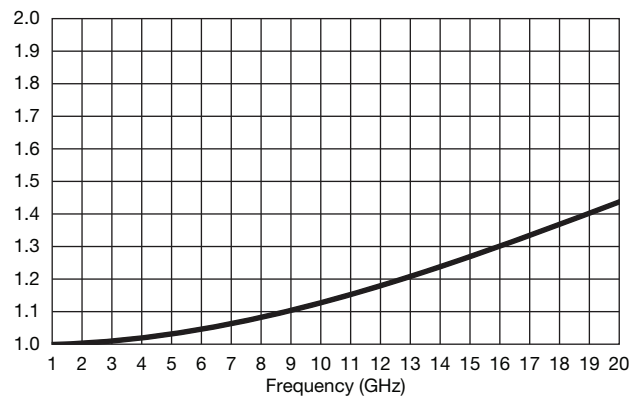



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View FC0402E50R0BTBST1 on WIN SOURCE](#)

 [Vishay Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management