











**THE DATASHEET OF
OPTF0078P**



Project: PTF Series
 Status: Production
 Date: August 9th 2013
 Rev 1

PTF Series			
Characteristic	OPTF0075P / OPTF0075PXBL	OPTF0077P	OPTF0078P
Fuse Link	5X20	5X20	5X20
Mounting	PCB	PCB	PCB
Rated Current	6.3 Amp.	6.3 Amp.	6.3 Amp.
Rated Voltage	250 VAC	250 VAC	250 VAC
Rated Power Acceptance	1.6 W	1.6 W	1.6 W
Housing	PA UL-94 V0	PA UL-94 V0	PA UL-94 V0
Admissible Air Temperature	-30° C to 85°C	-30° C to 85°C	-30° C to 85°C
Schoksafe Category	PC1	PC1	PC1
Degree of Protection	IP00	IP00	IP00
Contact Resistance	<5.0 mΩ	<5.0 mΩ	<5.0 mΩ
VDE Rated Current	6.3 Amp.	6.3 Amp.	6.3 Amp.
VDE Rated Voltage	250 VAC	250 VAC	250 VAC
VDE Rated Power Acceptance	1.6 W	1.6 W	1.6 W
UR Rated Current	10 Amp.	10 Amp.	10 Amp.
UR Rated Voltage	250 VDC	250 VDC	250 VDC
UR Rated Power Acceptance	-	-	-

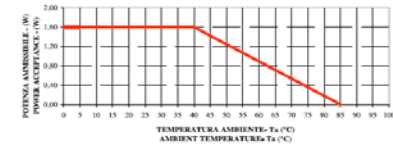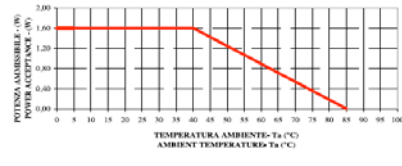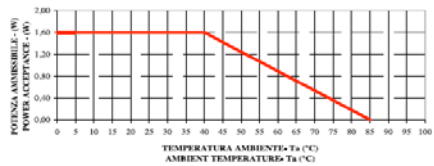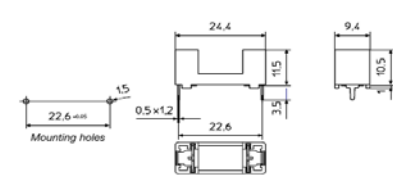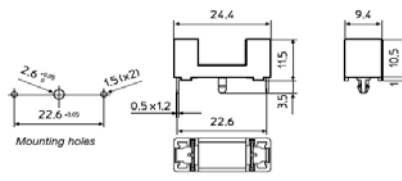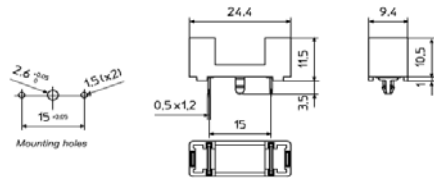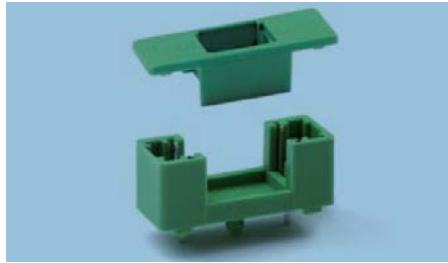

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View OPTF0078P on WIN SOURCE](#)

 [Littelfuse Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management