




**THE DATASHEET OF
1.85-LA-PJ**



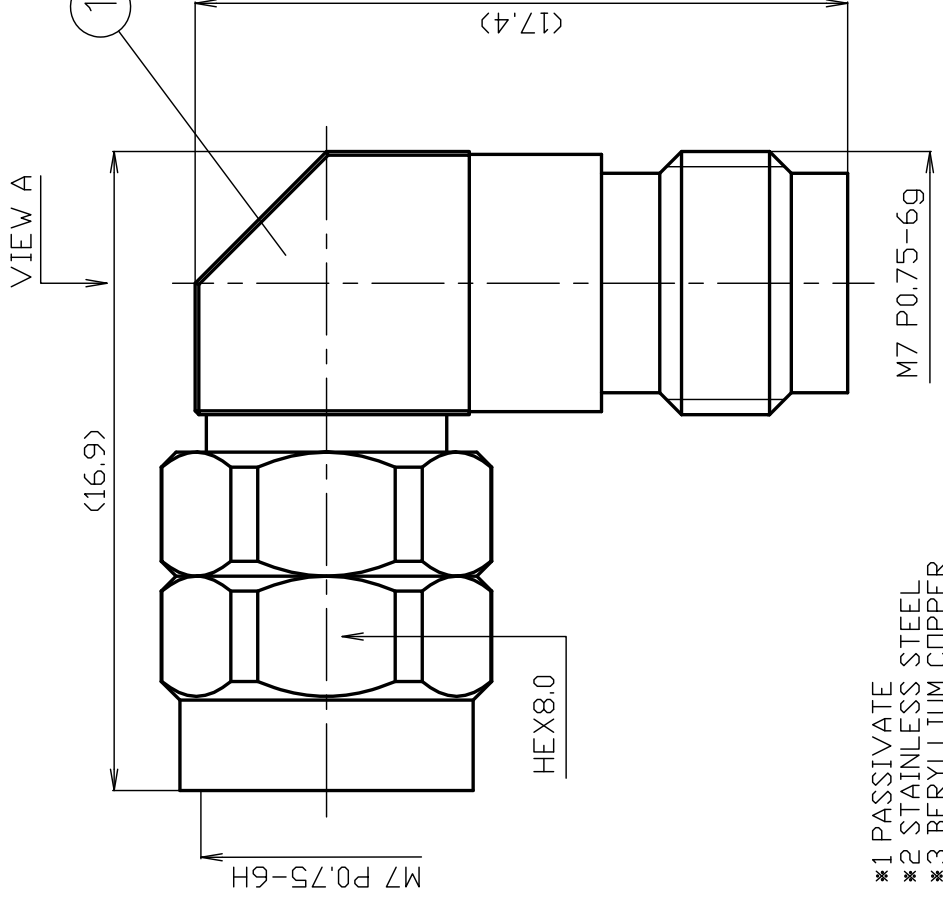

- *1 PASSIVATE STEEL
- *2 STAINLESS STEEL
- *3 BERYLLIUM COPPER

NO.	DESCRIPTION	MATERIAL	Q'TY	FINISH	REMARK
11	CENTER PIN C	*3	1	Au	
10	CENTER PIN B	*3	1	Au	
9	CENTER PIN A	*3	1	Au	
8	INSULATOR	PEI	2	--	
7	BUSHING D	*2	1	*1	
6	BUSHING C	*2	2	*1	
5	BUSHING B	*2	1	*1	
4	BUSHING A	*2	1	*1	
3	COUPLING NUT	*2	1	*1	
2	HOLDING RING	*3	1	Ni	
1	BODY	*2	1	*1	

SCALE 5/1

UNIT mm

DATE 2024.05.31

DRAWN	井出	'24.05.31
INSPECTED	樽澤	'24.05.31
APPR		'24.05.31

PROJECTION

株式会社 70-

PRODUCT SPECIFICATIONS

Part number: 1.85-LA-PJ

No. 1042570

Drawing number: V-1046387





Nominal 1 Standard	IEC 61169-32
2 Voltage rating	AC 160V
3 Rated frequency	67GHz
4 Impedance	50Ω
5 Operating tempture range	-55°C~+105°C



	Test Items	Test Method/Value	Remarks
1	E L E C T R I C A L	Insulation resistance 5000MΩ(Min.) at DC 500V	
2		Withstanding voltage 1 minute at AC 500V	
3		Contact resistance Inner conductor : 4.0mΩ(Max.) Outer conductor : 2.5mΩ(Max.)	
4		VSWR DC~67GHz : 1.4(Max.)	
5		Compatibility No defects or abnormalities	Connecting with a standard-compliant connector
6	M E C H A N I C A L	Tensile strength of coupling mechanism 447N	At axial tensile force
7		Center contact retaining force 0.25N(Min.)	With a standard pin gauge
8		Coupling torque 0.8~1.1N·m	
	O T H E R S		

※The structural shape is shown in the attached drawing (Drawing number:V-1046387)

	REVISIONS	DATE
1		
2		
3		

Checked	Approved	Inspected	Prepared
			

GKQM-24

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 1.85-LA-PJ on WIN SOURCE](#)

 [TYCLON Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management