




**Mechanical Specifications (mm)**

D:	31.0	± max
T:	5.0	± max
Lead Diameter	1.0	± nom
S:	7.8	± nom
L:	38.0	± nom
Coating Lead Run Down (straight Leads)	5.0	± max
B:	7.80	± nom
C:	3.82	± nom

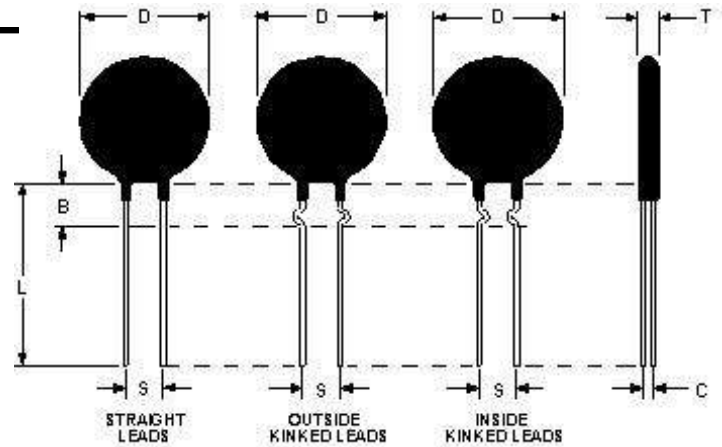

**Electrical Specifications**

Resistance:	1.0	Ω	± 20 %
Max Steady State Current upto 65°C:	30.00	A	
Max Rec. Energy Rating:	160	J	
Maximum Capacitance @ 120 VAC:	11,114	µf	
Maximum Capacitance @ 240 VAC:	2,778	µf	
Resistance @ 100% Max Current:	0.00	Ω	
Resistance @ 50% Max Current:	0.05	Ω	
Body Temperature at 100% Max Current:	214.00	°C	
Dissipation Constant:	45.4	mw/°C	
Thermal Time Constant:	245	Sec.	
Material Type (for Beta and Curve):	C		

<b>SL32 1R030</b>	
Date: 01/08/2016	Drawn by: Erin Landis
Ametherm, Inc. 961 Fairview Drive Carson City, Nevada USA 89701 www.ametherm.com	Approved By: Chad Terry
	Revision: B

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View SL321R030B on WIN SOURCE](#)

 [Ametherm Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management