




**THE DATASHEET OF**  
**009155002401006**



# TWO-PIECE 4.0MM PITCH BATTERY: 9155-400

## General Information

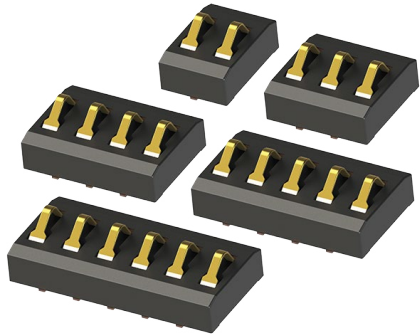

This unique battery or removable module-style connector differs from most others in that it allows the pluggable device to be connected from either direction. The spring contact offers an enhanced contact deflection range compared to existing connectors on the market, with a full 1.4 mm of travel after engagement. This contact design enables the connector to absorb more plastic or housing tolerances, making it more functional and reliable in real-life applications.

The fixed pad connector is unique in that it replaces the plating of gold directly onto PCB pads. The main benefit of this connector is that it elevates the pad surface well above the PCB, allowing the gold contacts to be close to flush with the outside packaging. This minimizes the distance that a spring contact would need to absorb within the mating tolerance band. Another unique feature of this connector is the angled contact lead-in on both sides, which facilitates smooth engagement of the spring contact from either direction.

### APPLICATIONS

- Portable electronics requiring a removable battery
- Interface for removable/pluggable modules or cartridges
- Docking cradle for charging and data transfer
- Product Specification: 201-01-207

### FEATURES AND BENEFITS

- Proven contact reliability in harsh industrial or medical applications
- Increased contact deflection range above existing connectors on the market
- Gold plated Beryllium contact spring contact assures maximum contact reliability and functionality up to 5000 cycles
- Beveled lead in on pad connector facilitates smooth module engagement from either direction

### ELECTRICAL

- Current Rating: 5 Amps / Contact
- Voltage Rating: 125 VAC (RMS) or DC equivalent

### ENVIRONMENTAL

- Operating Temperature: -40°C to +125°C
- Storage Temperature: -40°C to +70°C

### MECHANICAL

- Contact Material: Spring contact is Be Cu, Fixed contact is Phosphor Bronze
- Contact Plating: Gold over nickel mating area, pure Tin SMT tails
- Durability 5000 Cycles

### HOW TO ORDER

<b>00</b>	<b>9155</b>	<b>00X</b>
Prefix	Series	No. of Ways
		2 = 002
		3 = 003
		4 = 004
		5 = 005
		6 = 006

<b>40X</b>
Standard Battery Connector
401 = Battery Connector, Sprung Half, 550 Per Reel
402 = Battery Connector, Fixed Half, 1100 Per Reel

<b>00X</b>
Plating Option
006 = 0.4µm Selective Gold, Standard
008 = 0.8µm Selective Gold, Special Order



## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 009155002401006](#) on WIN SOURCE

 [AVX Corp/Kyocera Corp](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management