THE DATASHEET OF

ORWH-SH-124DM1F

3 | 2 | 1

ON – , – .
RVED.

LOC	DIST
HB	—

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	D	PN. OBSOLETE ECO-12-004810	24-APR-12	BL,L	BH,Y

E

PART B

CIRCUIT DIAGRAM (BOTTOM VIEW)



DRILLING DIAGRAM (BOTTOM VIEW)

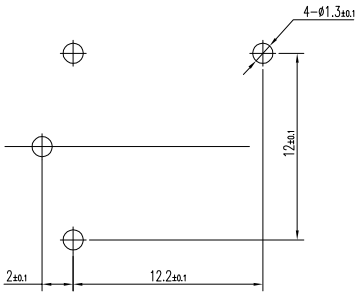

Ⓓ

STATUS	TE PART NO	DESCRIPTION	PART B	PART A	ITEM
OBSOLETE	1721153-1	ORWH-SS-103DM1F, 000	3V	ORWH-SS-103DM1F	A
OBSOLETE	1721153-2	ORWH-SS-105DM1F, 000	5V	ORWH-SS-105DM1F	B
ACTIVE	1721153-3	ORWH-SS-106DM1F, 000	6V	ORWH-SS-106DM1F	C
OBSOLETE	1721153-4	ORWH-SS-109DM1F, 000	9V	ORWH-SS-109DM1F	D
ACTIVE	1721153-5	ORWH-SS-112DM1F, 000	12V	ORWH-SS-112DM1F	E
OBSOLETE	1721153-6	ORWH-SS-118DM1F, 000	18V	ORWH-SS-118DM1F	F
ACTIVE	1721153-7	ORWH-SS-124DM1F, 000	24V	ORWH-SS-124DM1F	G
OBSOLETE	1721153-8	ORWH-SS-148DM1F, 000	48V	ORWH-SS-148DM1F	H
OBSOLETE	1721153-9	ORWH-SH-103DM1F, 000	3V	ORWH-SH-103DM1F	I
OBSOLETE	1-1721153-0	ORWH-SH-105DM1F, 000	5V	ORWH-SH-105DM1F	J
OBSOLETE	1-1721153-1	ORWH-SH-106DM1F, 000	6V	ORWH-SH-106DM1F	K
ACTIVE	1-1721153-2	ORWH-SH-109DM1F, 000	9V	ORWH-SH-109DM1F	L
ACTIVE	1-1721153-3	ORWH-SH-112DM1F, 000	12V	ORWH-SH-112DM1F	M
OBSOLETE	1-1721153-4	ORWH-SH-118DM1F, 000	18V	ORWH-SH-118DM1F	N
ACTIVE	1-1721153-5	ORWH-SH-124DM1F, 000	24V	ORWH-SH-124DM1F	O
ACTIVE	1-1721153-6	ORWH-SH-148DM1F, 000	48V	ORWH-SH-148DM1F	P

NOTE

Ⓒ 1.LOT NO. SYSTEM AS FOLLOWING:



INCOMBUSTIBILITY	TREATMENT	MATERIAL	DESCRIPTION	ITEM
		UV RESIN	UV SEAL(FOR SH)	13
		EPOXY RESIN	SEAL	12
CLASS 155 F		MW79	MAGNETIC WIRE	11
		HCP	COIL TERMINAL	10
UL94 V-0		PBT	BOBBIN	9
UL94 V-0		PBT	CASE	8
		Ag ALLOY	STATIONARY CONTACT	7
		Ag ALLOY	MOVABLE CONTACT	6
		Cu ALLOY	MOVABLE SPRING	5
		Cu ALLOY	NO TERMINAL	4
	Cu PLATED	STEEL	CORE	3
	Cu PLATED	STEEL	ARMATURE FORM A	2
	Ni PLATED	STEEL	YOKE	1

GENERAL TOLERANCE

Diagram dimension	Tolerance
0.99mm max.	±0.1mm
1 – 2.99mm	±0.2mm
3mm min.	±0.3mm

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL –

FINISH –

DWN XN.ZHANG
CHK WAYNE.PENG
APVD MJ.HO
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT —

TE Connectivity

NAME ORWH-1M CD FREE CUSTOMER DRAWING

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	Ⓒ-1721153	—

CUSTOMER DRAWING | SCALE 3:1 | SHEET 1 OF 1 | REV D

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- View ORWH-SH-124DM1F on WIN SOURCE
- TE Connectivity Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- Global Sourcing Solution
- Obsolete Management
- Cost Control Management
- Shortage Management
- Alternative Solution
- Excess Inventory Management