




**THE DATASHEET OF
PME295RB4220MR30**



KEMET Part Number: PME295RB4220MR30
(P295BJ222M440A)

PME295/P295, Film, Metallized Paper, Safety, 2200 pF, 20%, 440 VAC (Y1) (ENEC), 480 VAC (UL, cUL), 1500 VDC, 115°C, Lead Spacing = 15mm

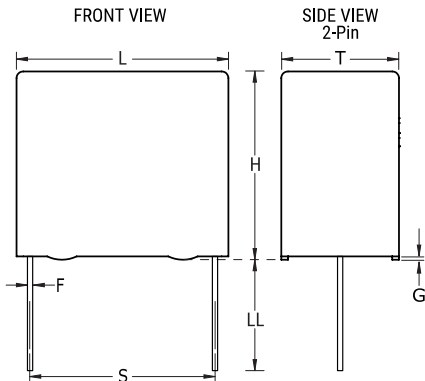

Dimensions

Dimension	Value
L	18mm MAX
H	12.5mm MAX
T	6.5mm MAX
S	15mm +/-0.4mm
LL	30mm +5mm
F	0.8mm +/-0.05mm
G	0.5mm NOM

Packaging Specifications

Packaging:	Bulk, Bag
Packaging Quantity:	400

General Information

Series:	PME295/P295
Dielectric:	Metallized Paper
Style:	Radial
Features:	EMI Safety
RoHS:	Yes
Lead:	Wire Leads
Qualifications:	ENEC, UL, cUL, CQC
Miscellaneous:	SRF= 33 MHz

Specifications

Capacitance:	2200 pF
Capacitance Tolerance:	20%
Voltage AC:	440 VAC (Y1) (ENEC), 480 VAC (UL, cUL)
Voltage DC:	1500 VDC
Temperature Range:	-40/+115C
Rated Temperature:	115°C
Dissipation Factor:	1.30% 1kHz
Insulation Resistance:	12 GOhms
Max dV/dt:	2000 V/us
Safety Class:	Y1

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View PME295RB4220MR30 on WIN SOURCE](#)

 [Kemet Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management