




**THE DATASHEET OF
QED122**



PACKAGE DIMENSIONS

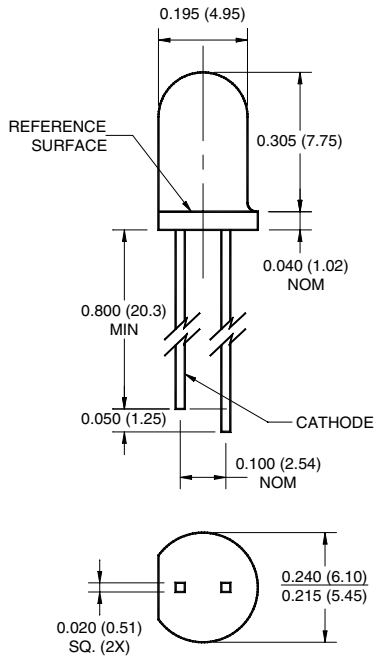


NOTES:

1. Dimensions for all drawings are in inches (mm).
2. Tolerance of $\pm .010$ (.25) on all non-nominal dimensions unless otherwise specified.


FEATURES

- $\lambda = 880$ nm
- Chip material = AlGaAs
- Package type: T-1 3/4 (5mm lens diameter)
- Matched Photosensor: QSD122/123/124
- Narrow Emission Angle, 18°
- High Output Power
- Package material and color: Clear, peach tinted, plastic



1. Derate power dissipation linearly 2.67 mW/°C above 25°C.
2. RMA flux is recommended.
3. Methanol or isopropyl alcohols are recommended as cleaning agents.
4. Soldering iron 1/16" (1.6mm) minimum from housing.

SCHEMATIC



ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Rating	Unit
Operating Temperature	T_{OPR}	-40 to +100	°C
Storage Temperature	T_{STG}	-40 to +100	°C
Soldering Temperature (Iron) ^(2,3,4)	T_{SOL-I}	240 for 5 sec	°C
Soldering Temperature (Flow) ^(2,3)	T_{SOL-F}	260 for 10 sec	°C
Continuous Forward Current	I_F	100	mA
Reverse Voltage	V_R	5	V
Power Dissipation ⁽¹⁾	P_D	200	mW

ELECTRICAL / OPTICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$)

PARAMETER	TEST CONDITIONS	SYMBOL	MIN	TYP	MAX	UNITS
Peak Emission Wavelength	$I_F = 20$ mA	λ_{PE}	—	880	—	nm
Emission Angle	$I_F = 100$ mA	Θ	—	± 9	—	Deg.
Forward Voltage	$I_F = 100$ mA, $t_p = 20$ ms	V_F	—	—	1.7	V
Reverse Current	$V_R = 5$ V	I_R	—	—	10	μA
Radiant Intensity QED121	$I_F = 100$ mA, $t_p = 20$ ms	I_E	16	—	40	mW/sr
Radiant Intensity QED122	$I_F = 100$ mA, $t_p = 20$ ms	I_E	32	—	100	mW/sr
Radiant Intensity QED123	$I_F = 100$ mA, $t_p = 20$ ms	I_E	50	—	—	mW/sr
Rise Time	$I_F = 100$ mA	t_r	—	800	—	ns
Fall Time		t_f	—	800	—	ns

TYPICAL PERFORMANCE CURVES

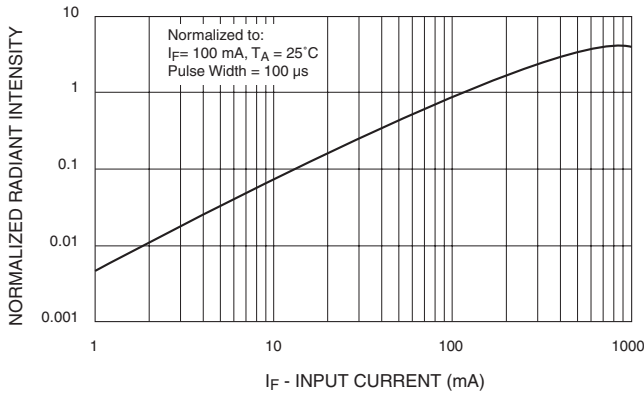


Fig. 1 Normalized Radiant Intensity vs. Input Current

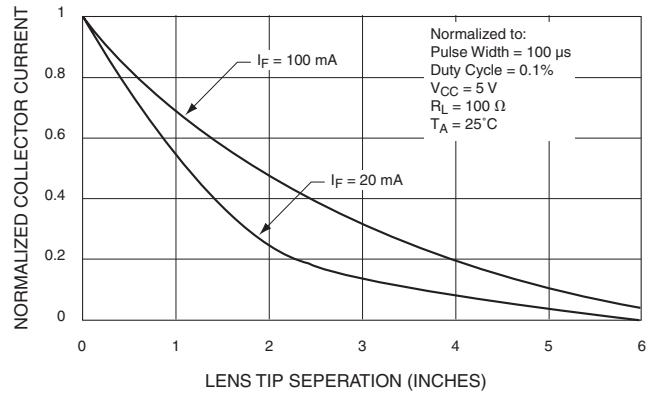


Fig. 2 Coupling Characteristics of QED12X and QSD12X

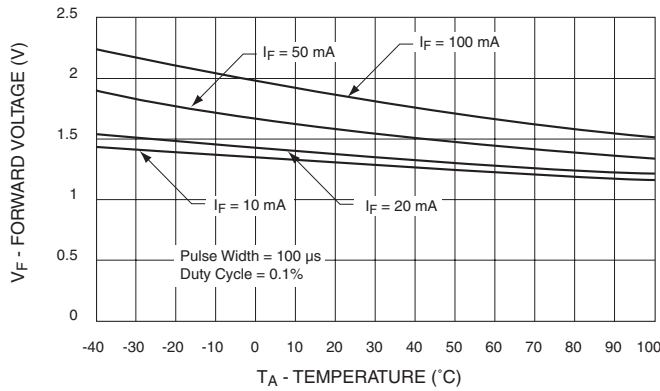


Fig. 3 Forward Voltage vs. Temperature

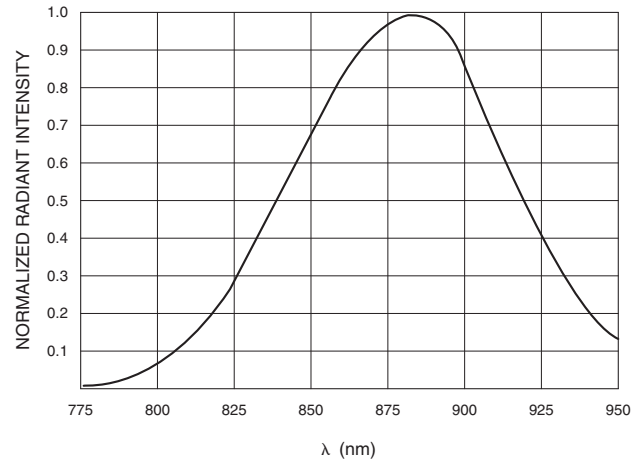


Fig. 4 Normalized Radiant Intensity vs. Wavelength

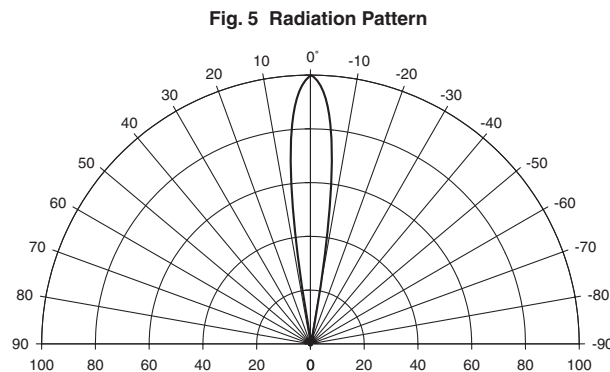


Fig. 5 Radiation Pattern

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View QED122 on WIN SOURCE](#)
- ⊖ [Fairchild/ON Semiconductor Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management