



**THE DATASHEET OF  
CA62808S07990**




**NOTES:**


1. FINISHED CABLE ASSEMBLY TO BE COILED
2. OVERMOLD BOOT MATERIAL: PVC, BLACK
3. ELECTRICAL TEST: 100% CONTINUITY

ASS'Y P/N	NO. OF POS.	"X" DIM.
CA62802S07990	2	6 FT 7 IN. ± 2 IN. [2M]
CA62803S07990	3	
CA62804S07990	4	
CA62805S07990	5	
CA62806S07990	6	
CA62807S07990	7	
CA62808S07990	8	
CA6280XSXXX90		


CABLE LENGTH IN "INCHES"  
NO OF POSITIONS




**FACE VIEW**  
P/N: CA62802SXXX90




**FACE VIEW**  
P/N: CA62803SXXX90




**FACE VIEW**  
P/N: CA62804SXXX90




**FACE VIEW**  
P/N: CA62805SXXX90




**FACE VIEW**  
P/N: CA62806SXXX90




**FACE VIEW**  
P/N: CA62807SXXX90



**FACE VIEW**  
CA62808SXXX90

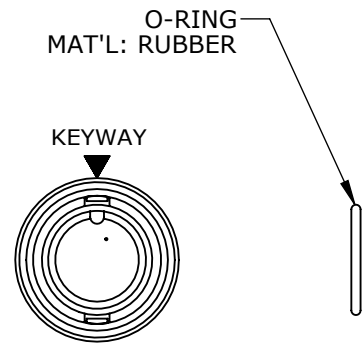

**END "A" FACE VIEW**

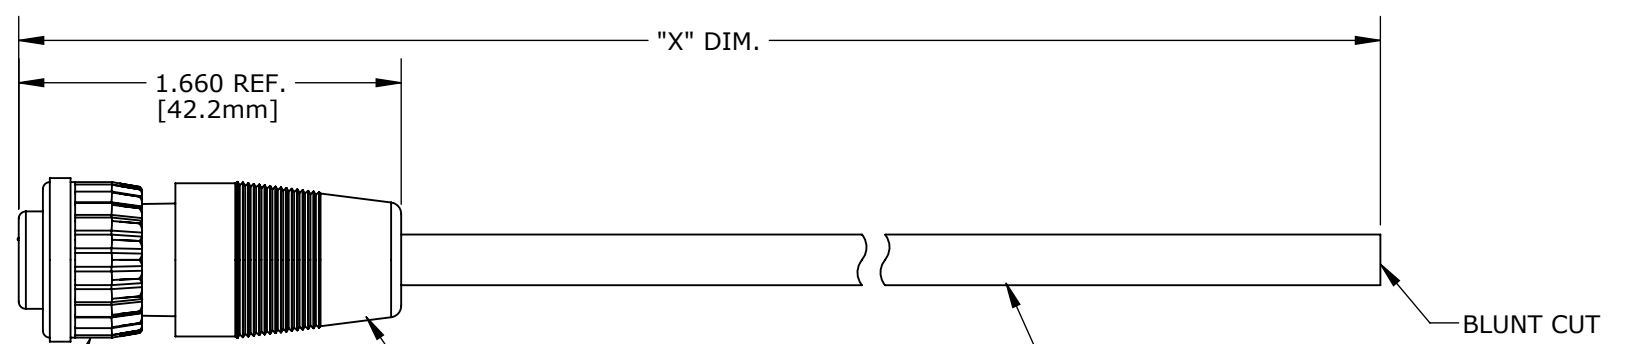

ASSY P/N	CABLE	COLOR CODE END "A"							
CA62802SXXX90	2/20 AWG O.D. 0.215 REF	COLOR CODE							
		POS. 1	POS. 2						
CA62803SXXX90	3/20 AWG O.D. 0.220 REF	WIRE COLOR CODE							
		POS. 1	POS. 2	POS. 3					
		BLK	WHT	GRN					
CA62804SXXX90	4/20 AWG O.D. 0.235 REF	WIRE COLOR CODE							
		POS. 1	POS. 2	POS. 3	POS. 4				
		BLK	WHT	GRN	RED				
		WIRE COLOR CODE							
CA62805SXXX90	5/20 AWG O.D. 0.255 REF	POS. 1	POS. 2	POS. 3	POS. 4	POS. 5			
		BLK	WHT	GRN	RED	BLU			
		WIRE COLOR CODE							
		POS. 1	POS. 2	POS. 3	POS. 4	POS. 5	POS. 6		
		BLK	WHT	GRN	RED	BLU	VIO		
CA62807SXXX90	8/20 AWG O.D. 0.300 REF	WIRE COLOR CODE							
		POS. 1	POS. 2	POS. 3	POS. 4	POS. 5	POS. 6	POS. 7	
		BLK	WHT	GRN	RED	BLU	VIO	GRY	
		WIRE COLOR CODE							
		POS. 1	POS. 2	POS. 3	POS. 4	POS. 5	POS. 6	POS. 7	POS. 8
		BLK	WHT	GRN	RED	BLU	VIO	GRY	BRN
		WIRE COLOR CODE							
CA62808SXXX90	8/20 AWG O.D. 0.300 REF	POS. 1	POS. 2	POS. 3	POS. 4	POS. 5	POS. 6	POS. 7	POS. 8
		BLK	WHT	GRN	RED	BLU	VIO	GRY	BRN

DIMENSIONS IN BRACKET [ ] ARE METRIC.

**RoHS COMPLIANT**

**CUSTOMER APPROVAL**

THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.

APPROVED BY: \_\_\_\_\_

DATE: \_\_\_\_\_

REV.	INIT.	DATE	DESCRIPTION
A	AN	06-07-16	DRAWING CREATED PER DOR 16-7414JP
<small>ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF CONXALL CORPORATION. UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.</small>			<small>ORIG. DRAWN BY: AN</small> <small>DATE: 05-25-16</small> <small>CHECKED BY:</small>
<small>ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.</small>			<small>APPROVED BY:</small> <small>TITLE: CABLE ASSEMBLY (2-8) #20 SOCKET CONTACTS MINI-CON-X STANDARD PRODUCT</small>
<small>SCALE: NTS</small> <small>SIZE: B</small> <small>SHEET: 1 OF 1</small>		<small>FILE: CA6280XSXXX90</small> <small>DIRECTORY: SLW</small>	<small>PART NUMBER: CA6280XSXXX90</small> <small>REV: A</small>

CUSTOMER PRINT

PART NUMBER: CA6280XSXXX90

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View CA62808S07990 on WIN SOURCE](#)

 [Conxall/Switchcraft Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management