



THE DATASHEET OF RB751S-40DP-TP





RB751S-40DP

40 Volts Schottky Barrier Diode

Features


- Halogen free available upon request by adding suffix "-HF"
- Small surface mounting type
- Low reverse current and low forward voltage
- High reliability
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL Rating 1
- Lead Free Finish/RoHS Compliant ("P" Suffix designates RoHS Compliant. See ordering information)
- Marking: 5

Maximum Ratings


Symbol	Rating	Rating	Unit
V_{RM}	Peak Reverse Voltage	40	V
$V_{R(RMS)}$	RMS Reverse Voltage	28	V
I_O	Mean Rectifying Current	30	mA
I_{FSM}	Non-Repetitive Peak forward Surge Current @ $t=8.3ms$, half sine wave	200	mA
P_d	Power Dissipation	100	mW
R_{thJA}	Thermal Resistance from Junction to Ambient	1000	$^{\circ}C/W$
T_J	Junction Temperature	125	$^{\circ}C$
T_{STG}	Storage Temperature	-55 to +125	$^{\circ}C$

Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Typ	Max	Units
OFF CHARACTERISTICS					
V_F	Forward Voltage ($I_F=1mA$)	---	---	0.37	Vdc
$V_{(BR)}$	Reverse Breakdown Voltage ($I_R=1mA$)	40	---	---	Vdc
I_R	Reverse Current ($V_R=30Vdc$)	---	---	0.5	μA
C_T	Capacitance between Terminals ($V_R=1V, f=1MHz$)	---	2	---	pF




0201




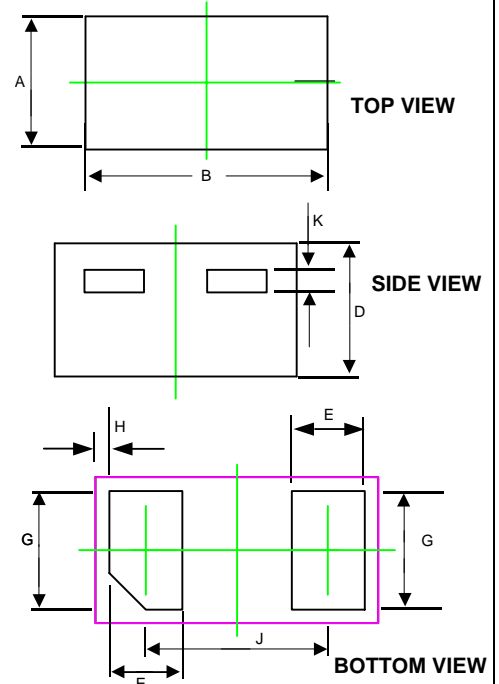


DIM	DIMENSIONS				NOTE
	INCHES		MM		
A	0.011	0.015	0.27	0.37	
B	0.022	0.026	0.57	0.67	
D	0.011	0.013	0.275	0.34	
E	0.005	0.008	0.125	0.195	
G	0.009	0.012	0.225	0.295	
H	0.001	REF.	0.030	REF.	
J	0.014	0.017	0.365	0.435	
K	0.002	REF.	0.050	REF.	

SUGGESTED SOLDER PAD LAYOUT



RB751S-40DP

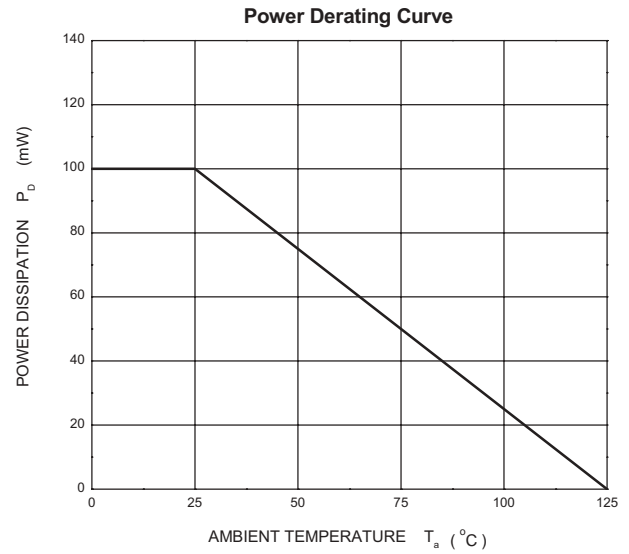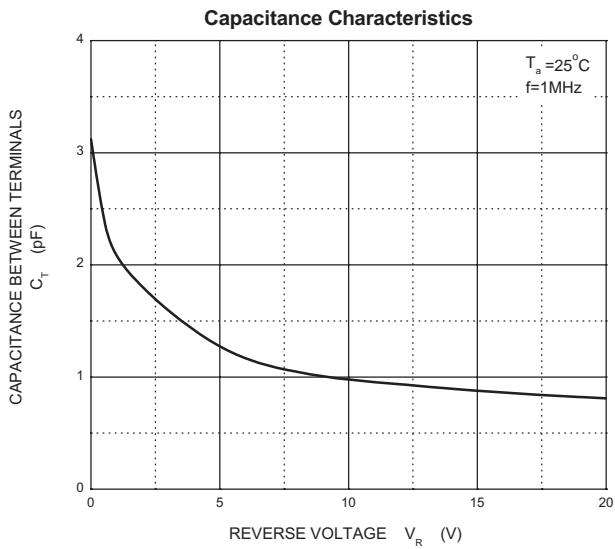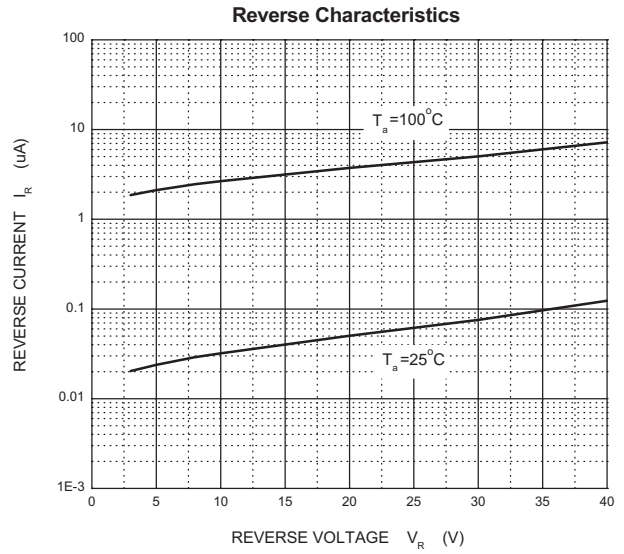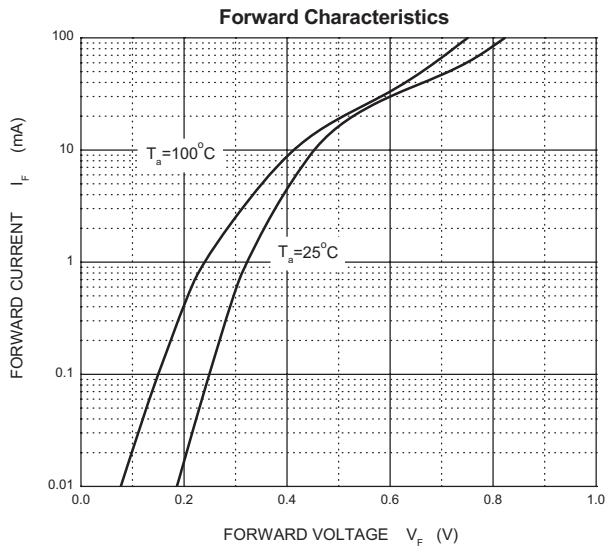



Micro Commercial Components

Ordering Information

Device	Packing
(Part Number)-TP	Tape&Reel;10Kpcs/Reel

Note : Adding "-HF" suffix for halogen free, eg. Part Number-TP-HF

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . **Micro Commercial Components Corp .** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp .** and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

www.mccsemi.com

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View RB751S-40DP-TP on WIN SOURCE](#)
-  [Micro Commercial Co](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management