




**THE DATASHEET OF
EDSTLZ965/4**



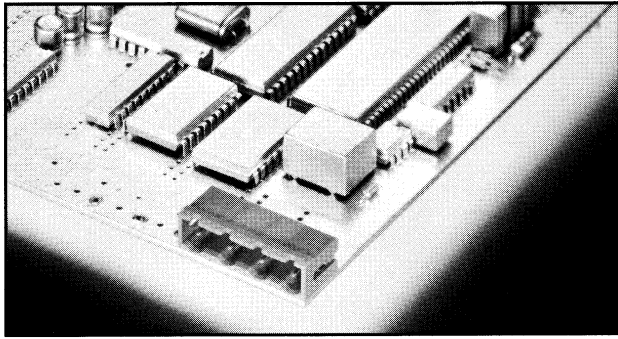


EDSTLZ 960



2-16 poles, Spacing 7.62 mm
insert required no. of poles **
How to order see page 6

Ratings:


	 UL1059	 CSA 22.2 No. 158	 DIN VDE 0627
Rated Voltage	250 VB	300 VB	400 V
Rated Current	15 A	16 A	12 A (T60)
Test Voltage			3.31 kV

Dimensions


Spacing	7.62 mm
PCB Hole Diameter	1.4 mm

Materials

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Contact Pin	Cu
Color	Green

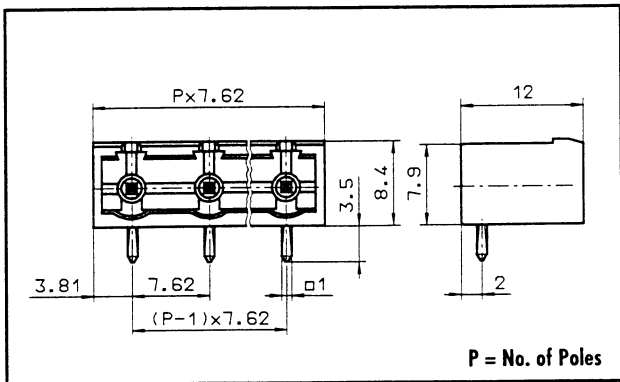

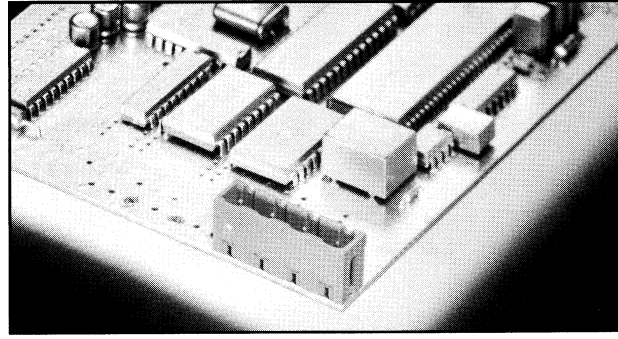


EDSTLZ 965



2-16 poles, Spacing 7.62 mm
insert required no. of poles **
How to order see page 6

Ratings:


	 UL1059	 CSA 22.2 No. 158	 DIN VDE 0627
Rated Voltage	250 VB	300 VB	400 V
Rated Current	15 A	16 A	12 A (T60)
Test Voltage			3.31 kV

Dimensions

Spacing	7.62 mm
PCB Hole Diameter	1.4 mm

Materials

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Contact Pin	Cu
Color	Green

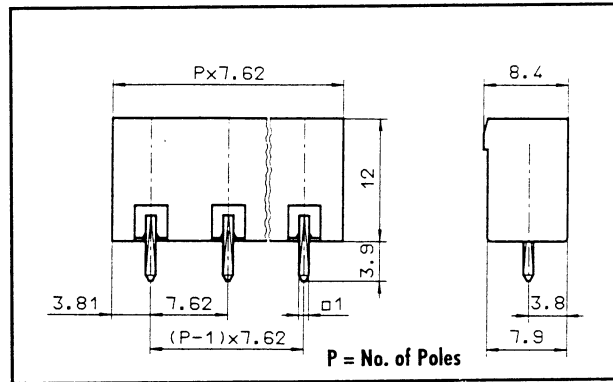

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- [View EDSTLZ965/4 on WIN SOURCE](#)
- [On Shore Technology Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management