



**THE DATASHEET OF
SL22 0R712**






ISO9001:2008 Certified

Mechanical Specifications (mm)

D:	22.0	± max
T:	6.0	± max
Lead Diameter	1.0	± nom
S:	7.8	± nom
L:	38.0	± nom
Coating Lead Run Down (straight Leads)	5.0	± max
B:	9.22	± nom
C:	3.00	± nom

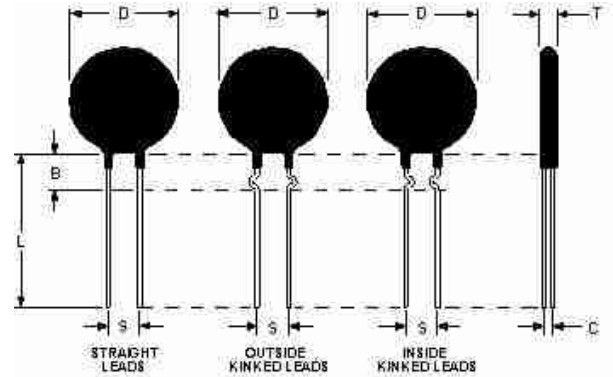


Electrical Specifications

Resistance:	0.7	Ω	± 25 %
Max Steady State Current upto 65°C:	12.00	A	
Max Rec. Energy Rating:	120	J	
Actual Failure Instantaneous Energy:	250	J	
Maximum Capacitance @ 120 VAC:	8,335	µf	
Maximum Capacitance @ 240 VAC:	2,083	µf	
Resistance @ 100% Max Current:	0.03	Ω	
Resistance @ 50% Max Current:	0.06	Ω	
Body Temperature at 100% Max Current:	165.00	°c	
Dissipation Constant:	32.4	mw/°c	
Thermal Time Constant:	94	Sec.	
Material Type (for Beta and Curve):	A		

SL22 0R712	
Date: 11/11/2008	Drawn by: Erin Landis
Ametherm, Inc. 3111 N. Deer Run Road Carson City, Nevada USA 89701 www.ametherm.com	Approved By: Mehdi Samii
	Revision: a

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View SL22 0R712 on WIN SOURCE](#)

 [Ametherm Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management