




**THE DATASHEET OF  
PME264NC5330MR30**



**KEMET Part Number: PME264NC5330MR30**  
(P264CP333M660A)

PME264/P264, Film, Metallized Paper, Safety, 0.033 uF, 20%, 660 VAC (X2), 1500 VDC, 85°C, Lead Spacing = 20.3mm

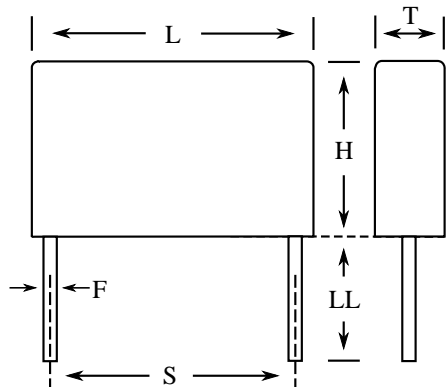

General Information	
Series:	PME264/P264
Dielectric:	Metallized Paper
Style:	Radial
Features:	EMI Safety
RoHS:	Yes
Lead:	Wire Leads
Qualifications:	ENEC, UL, cUL
AEC-Q200:	No
Construction:	Molded

Dimensions	
L	24mm MAX
H	16.5mm MAX
T	11.3mm MAX
S	20.3mm +/-0.4mm
LL	30mm +5mm
F	0.8mm NOM

Specifications	
Capacitance:	0.033 uF
Capacitance Tolerance:	20%
Voltage AC:	660 VAC (X2)
Voltage DC:	1500 VDC
Temperature Range:	-40/+85°C
Rated Temperature:	85°C
Dissipation Factor:	1.30% 1kHz
Insulation Resistance:	12 GOhms
Max dV/dt:	1000 V/us
Safety Class:	X2

Packaging Specifications	
Packaging:	Bulk, Bag
Packaging Quantity:	150

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View PME264NC5330MR30 on WIN SOURCE](#)

 [Kemet Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management