



# THE DATASHEET OF SMAT70A-13




### Features

- 400, 600W Peak Pulse Power Dissipation
- 70V Standoff Voltage
- 100V Maximum Clamping Voltage - A requirement of many -48V Backplane Telecom Applications
- Glass Passivated Die Construction
- Fast Response Time: Typically less than 1 ps
- Plastic Material - UL Flammability Classification Rating 94V-0

### Mechanical Data

- Case: SMA, SMB Transfer Molded Epoxy
- Case Material - UL Flammability Rating 94V-0
- Moisture sensitivity: Level 1 per J-STD-020A
- Terminals: Solderable per MIL-STD-202, Method 208
- Polarity Indicator: Cathode Band
- Marking: Date Code (See Page 3) and Marking Code (See Page 1)
- Weight: SMA 0.064 grams  
SMB 0.093 grams
- Ordering Information: See Page 3

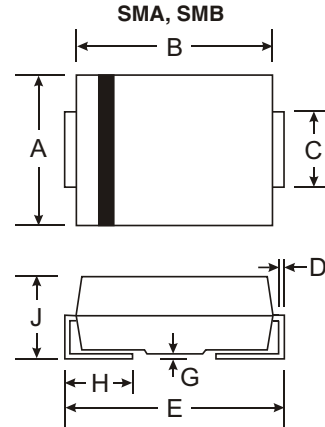

Package	SMAT70A		SMBT70A	
	Min	Max	Min	Max
Dim				
A	2.29	2.92	3.30	3.94
B	4.00	4.60	4.06	4.57
C	1.27	1.63	1.96	2.21
D	0.15	0.31	0.15	0.31
E	4.80	5.59	5.00	5.59
G	0.10	0.20	0.10	0.20
H	0.76	1.52	0.76	1.52
J	2.01	2.62	2.00	2.62




### Maximum Ratings @ T<sub>A</sub> = 25°C unless otherwise specified

Characteristic	Symbol	SMAT70A	SMBT70A	Unit
Peak Pulse Power Dissipation (Non repetitive current pulse derated above T <sub>A</sub> = 25°C)	P <sub>PK</sub>	400	600	W
Peak Forward Surge Current, 8.3ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method) (Note 2)	I <sub>FSM</sub>	40	100	A
Instantaneous Forward Voltage @ I <sub>PP</sub> = 35A (Note 2)	V <sub>F</sub>	3.5		V
Operating and Storage Temperature Range	T <sub>j</sub> , T <sub>STG</sub>	-55 to +150		°C

### Electrical Characteristics @ T<sub>A</sub> = 25°C unless otherwise specified

Part Number	Reverse Standoff Voltage	Breakdown Voltage V <sub>BR</sub> @ I <sub>T</sub> (Note 3)		Test Current	Max. Reverse Leakage @ V <sub>RWM</sub>	Max. Clamping Voltage @ I <sub>pp</sub>	Max. Peak Pulse Current I <sub>pp</sub>	Typical Junction Capacitance (Note 3)	Typical Voltage Temp. Variation of V <sub>BR</sub>	Marking Code
	V <sub>RWM</sub> (V)	Min (V)	Max (V)	I <sub>T</sub> (mA)	I <sub>R</sub> (μA)	V <sub>C</sub> (V)	(A)	(pF)	mV/°C	
SMAT70A	70	77.8	89.5	1.0	5.0	100	3.5	55	80	KEX
SMBT70A	70	77.8	89.5	1.0	5.0	100	5.3	80	80	NPX

- Notes: 1. Measured with 8.3ms single half sine-wave. Duty cycle = 4 pulses per minute maximum.  
2. V<sub>BR</sub> measured with I<sub>T</sub> current pulse = 300μs.  
3. f = 1MHz, V<sub>R</sub> = 0VDC.

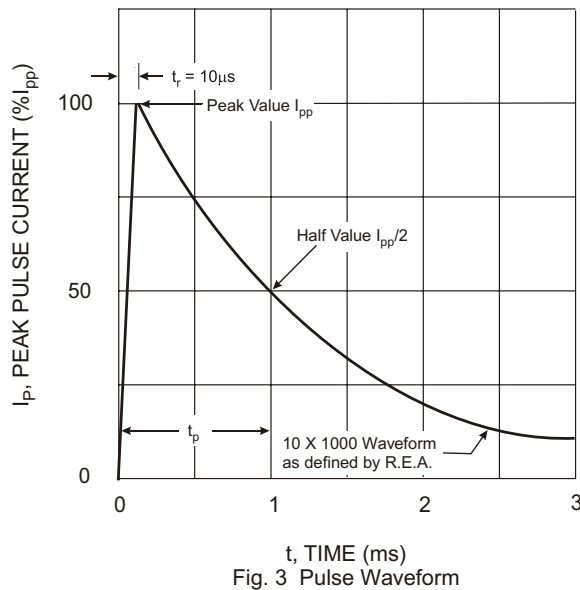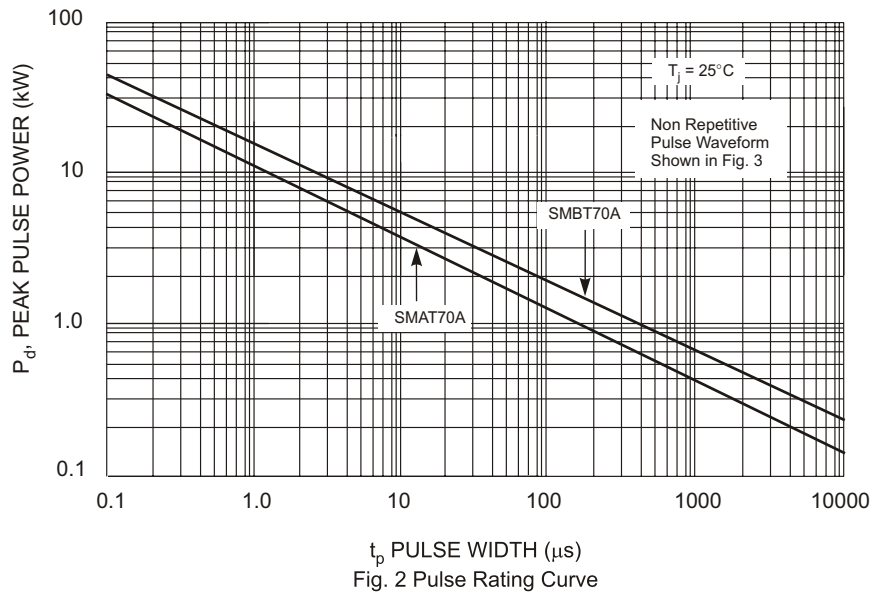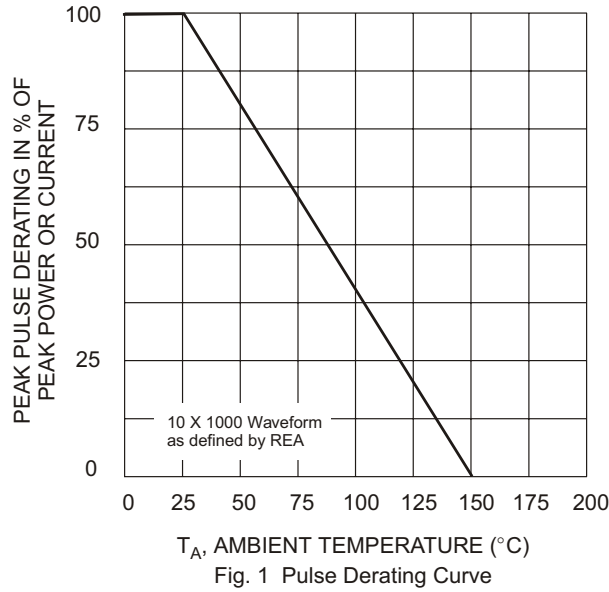

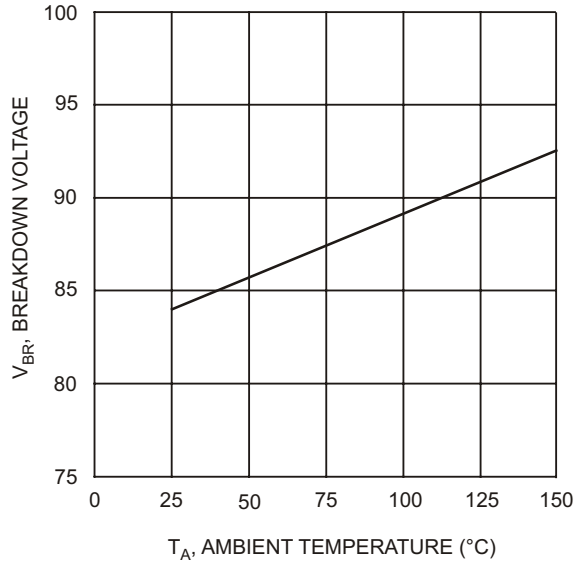



Fig. 4 Average Breakdown Voltage vs. Ambient Temperature

**Ordering Information** (Note 4)

Device	Packaging	Shipping
SMAT70A-13 SMBT70A-13	SMA SMB	5000/Tape & Reel

Notes: 4. For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.



**Marking Information**



XXX = Product type marking code (See Sheet 1)  
 D11 = Manufacturers' code marking  
 YWW = Date code marking  
 Y = Last digit of year ex: 2 for 2002  
 WW = Week code 01 to 52

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View SMAT70A-13 on WIN SOURCE](#)
-  [Diodes Incorporated Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management