



THE DATASHEET OF SIM-14H+



Frequency Mixer WIDE BAND

SIM-14H+

Level 17 (LO Power +17 dBm) 3700 to 10000 MHz



Generic photo used for illustration purposes only

CASE STYLE: HV1195

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	100mW

For extended temperature range, consult factory.
Permanent damage may occur if any of these limits are exceeded.

Pin Connections

LO	8
RF	4
IF	2
GROUND	1,3,5,6,7

Features

- wide bandwidth, 3700 to 10000 MHz
- low conversion loss, 7.0 dB typ.
- high L-R isolation, 38 dB typ.
- excellent IF BW, DC to 4000 MHz
- LTCC double balanced mixer
- tiny size, low profile, 0.08"
- useable as up and down converter
- aqueous washable
- protected by US patent 7,027,795

Applications

- satellite up and down converters
- defense radar and communications
- line of sight links
- federal fixed service
- WIFI
- blue tooth
- VSAT
- ISM


+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost

Reel Size	Devices/Reel
7"	10, 20, 50, 100, 200, 500

Outline Drawing

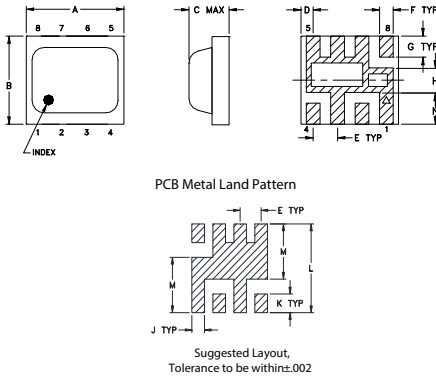

Electrical Specifications

FREQUENCY (MHz)	CONVERSION LOSS* (dB)			LO-RF ISOLATION (dB)		LO-IF ISOLATION (dB)		IP3 (dBm)
	LO/RF $f_c - f_u$	IF	DC-4000	Typ.	Min.	Typ.	Min.	
3700-10000	7.0	0.3	9.3	38	29	16	9	25
3700-6200	7.0	0.3	10.5	35	24	17	8	25

1 dB Compression: +14 dBm typ.
* Conversion loss at 30 MHz IF. σ is a measure of repeatability from unit to unit.


Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm
3560.00	3590.00	7.51	37.51	16.92	2.55	7.97
3720.00	3750.00	8.17	42.81	18.98	3.05	3.95
3880.00	3910.00	7.17	40.82	17.17	3.17	6.58
4040.00	4070.00	7.62	43.86	18.91	3.51	7.34
4200.00	4230.00	7.48	38.33	16.97	3.29	4.29
4520.00	4550.00	7.00	37.71	16.17	3.56	1.94
4840.00	4870.00	6.57	37.94	16.15	3.28	2.16
5100.00	5130.00	7.10	39.65	16.32	3.40	1.59
5880.00	5910.00	7.55	39.57	13.91	5.48	1.36
6270.00	6300.00	7.79	35.34	13.12	4.81	2.46
6660.00	6690.00	7.56	29.49	12.32	3.01	2.34
7050.00	7080.00	6.71	31.34	12.85	2.24	3.16
7830.00	7860.00	6.80	33.03	14.74	1.54	3.97
8220.00	8250.00	6.99	32.05	15.28	1.90	3.32
8610.00	8640.00	7.19	39.29	15.05	2.77	2.30
9000.00	9030.00	7.96	37.33	15.47	3.79	1.54
9100.00	9130.00	7.93	37.82	16.00	3.99	1.45
9450.00	9480.00	8.29	41.23	18.02	4.17	1.54
9800.00	9830.00	8.39	42.86	19.43	4.83	2.02
10150.00	10180.00	8.92	42.41	21.36	5.20	2.60

Outline Dimensions (inch/mm)


A	B	C	D	E	F	G
.200	.180	.087	.025	.050	.028	.043
5.08	4.57	2.2098	0.64	1.27	0.71	1.09
H	J	K	L	M	N	wt
.050	.030	.043	.204	.127	0.065	grams
1.27	0.76	1.09	5.18	3.23	1.65	0.08

Demo Board MCL P/N: TB-382 Suggested PCB Layout (PL-239)

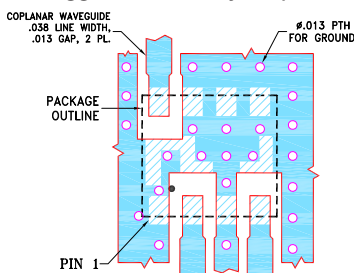

- NOTES:
1. TRACE WIDTH AND GAP ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020"±.0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.









Electrical Schematic

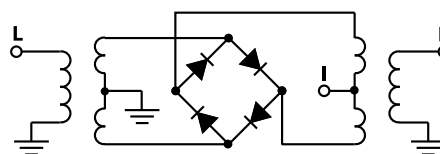

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/WCLStore/terms.jsp



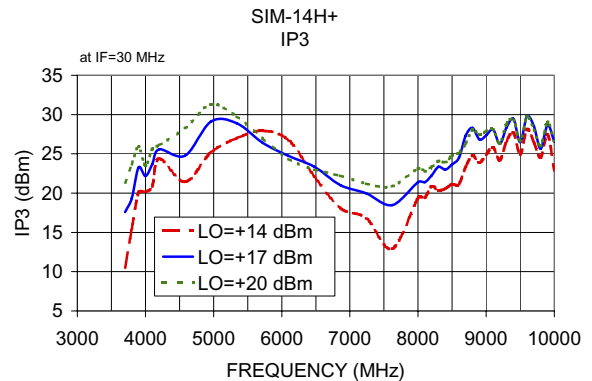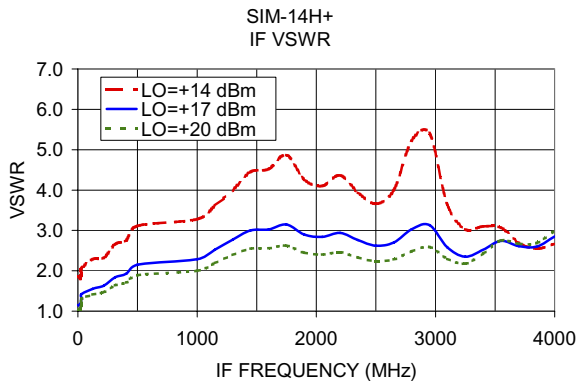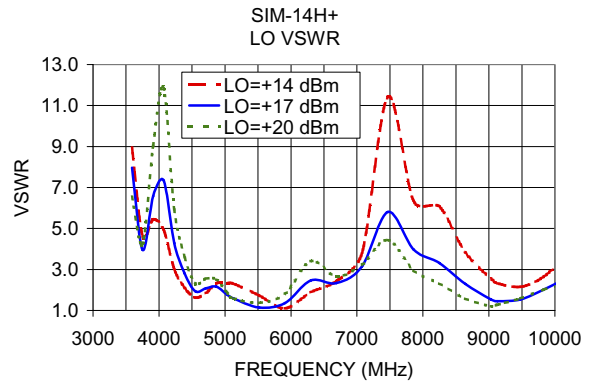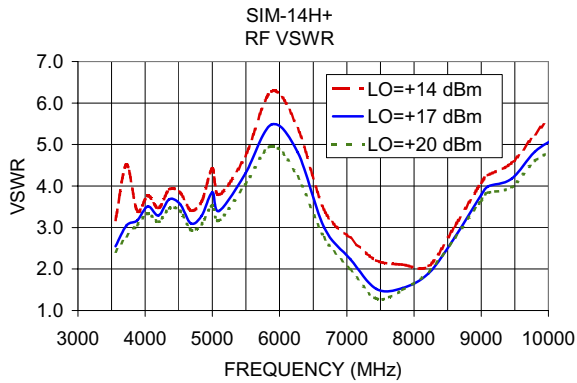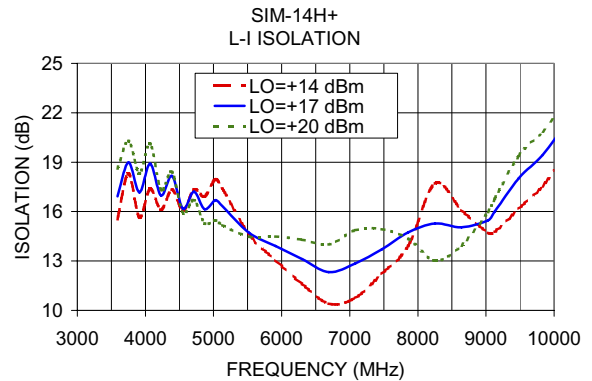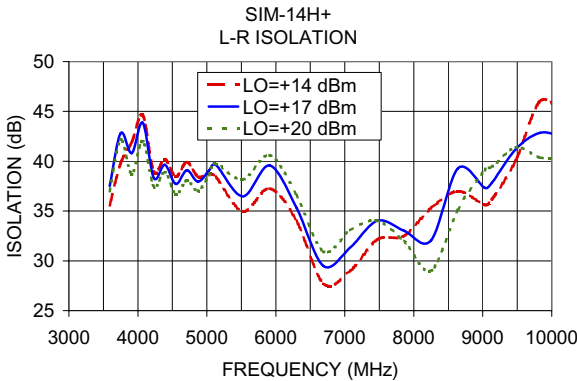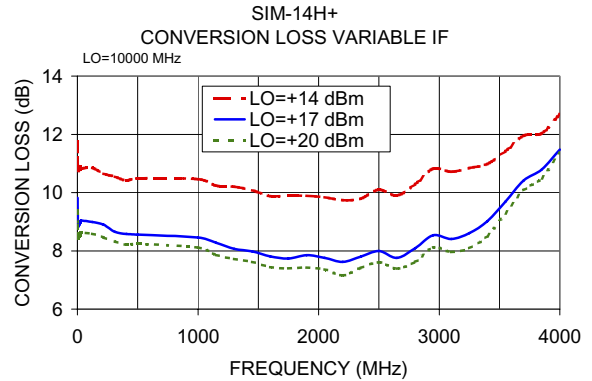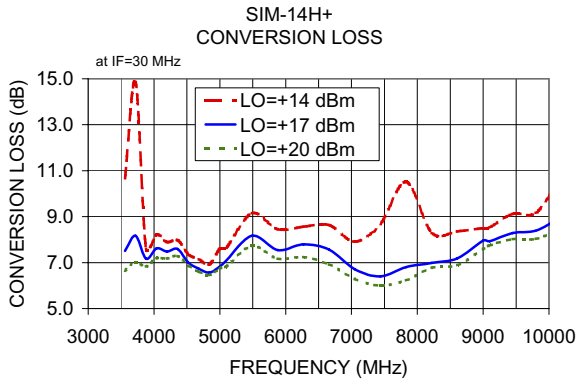



Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View SIM-14H+](#) on WIN SOURCE
-  [Mini-Circuits](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management