

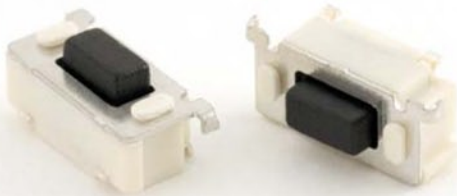


**THE DATASHEET OF
TL3330AF260QG**



SERIES TL 3330 SWITCHES

TACT SWITCHES SMT - RIGHT ANGLE



SPECIFICATIONS

Contact Rating:	50mA @ 12 VDC
Life Expectancy:	50,000 cycles-F130 30,000 cycles-F260
Contact Resistance:	100mΩ
Insulation Resistance:	100MΩ
Dielectric Strength:	250 VAC
Actuation Force:	130± 40 gf, 260± 50 gf
Operating Temperature:	-30°C to 70°C
Travel:	0.25mm ± 0.15mm

FEATURES & BENEFITS

- ▶ Multiple gram force options
- ▶ Small profile works great for many consumer electronic applications

APPLICATIONS/MARKETS

- ▶ Telecommunications
- ▶ Consumer Electronics
- ▶ Audio/visual
- ▶ Medical
- ▶ Testing/instrumentation
- ▶ Computer/servers/peripherals

MATERIALS

Actuator:	Nylon
Base:	Nylon
Cover:	Tin Plate
Terminals:	Copper alloy, plated


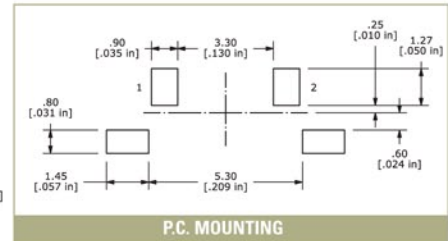
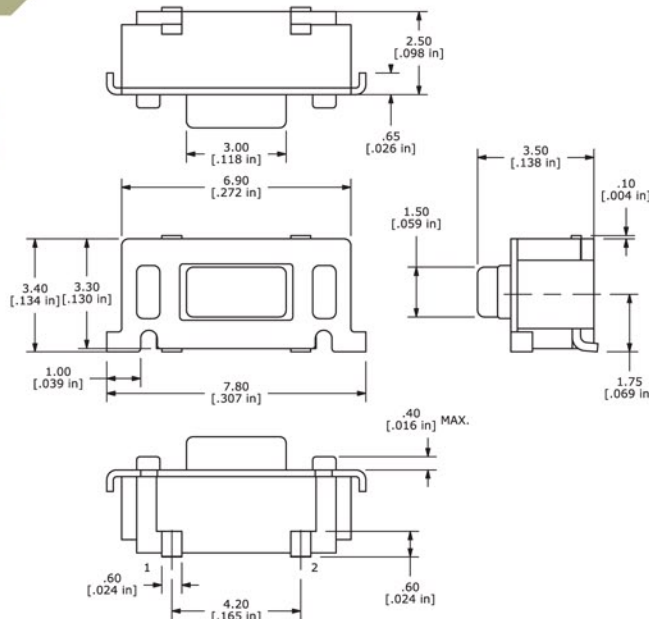
HOW TO ORDER

SERIES	MODEL NO.	ACTUATOR ("L" Dimension)	OPERATING FORCE	CONTACT MATERIAL	TERMINATION
TL	3330	A = 3.50mm	F130 F260	Q = Silver	G = Gull Wing

▶ ▶ ▶ Example Ordering Number
TL-3330-A-F260-Q-G



Specifications subject to change without notice.

TL 3330









Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View TL3330AF260QG on WIN SOURCE](#)
-  [E-Switch Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management