



**THE DATASHEET OF  
CL32B475KCVZW6E**





# MULTILAYER CERAMIC CAPACITORS

# MULTILAYER CERAMIC CAPACITORS



## Interactive User Guide

Samsung Electro-Mechanics' MLCC Catalog was produced as an INTERACTIVE PDF that allows transferring to related webpages for better understanding of the content. Click 'HOME,' 'CONTENTS,' OR 'GO BACK TO PAGE' as needed, and it is also possible to 'PRINT' the pages. If you click the icon at the top of the page, it is possible to view a specific page of choice.



By clicking this icon, you can jump directly to the cover page of this catalog.



By clicking this icon, you can jump directly to the Table of Contents.



By clicking this icon, you can jump directly to the previous page.



By clicking this icon, you can set and print pages of your choice.

# C O N T E N T S

**04** Explanation of Ceramic Capacitors

**06** Part Numbering

**09** Reliability Level Description

**10** Normal Capacitors\_Standard

**80** Normal Capacitors\_High Level I

**102** Normal Capacitors\_High Level II

**107** Molded Frame Capacitors (MFC)

**108** Land Side Capacitors (LSC)

**110** High Bending Strength Capacitors

**116** Low Acoustic Noise Capacitors

**120** Low ESL Capacitors

**125** Application Guide

**129** Reliability Test Conditions

**135** Packaging Specifications

**141** Caution/Notice

**162** Disclaimer & Limitation of Use and Applications

**163** Component Sales Offices/Manufacturing Sites



► **Explanation of Ceramic Capacitors**

Part Numbering  
Reliability Level Description  
Normal Capacitors\_Standard  
Normal Capacitors\_High Level I  
Normal Capacitors\_High Level II

Molded Frame Capacitors (MFC)  
Land Side Capacitors (LSC)  
High Bending Strength Capacitors  
Low Acoustic Noise Capacitors  
Low ESL Capacitors  
Application Guide

Reliability Test Conditions  
Packaging Specifications  
Caution/Notice  
Disclaimer & Limitation of Use and Applications  
Component Sales Offices/  
Manufacturing Sites

# Explanation of Ceramic Capacitors

## Nomal Capacitors

Normal Capacitors

Standard

High Level I

High Level II

Improved Reliability  
(65°C, 90%RH, 1Vr, 500H)

Reinforced Reliability  
(85°C, 85%RH, 1Vr, 1000H)

## Molded Frame Capacitors

Solution for mechanical and thermal stress

## Land Side Capacitors

Lower thickness and space saving

LSC



► **Explanation of Ceramic Capacitors**

Part Numbering  
Reliability Level Description  
Normal Capacitors\_Standard  
Normal Capacitors\_High Level I  
Normal Capacitors\_High Level II

Molded Frame Capacitors (MFC)  
Land Side Capacitors (LSC)  
High Bending Strength Capacitors  
Low Acoustic Noise Capacitors  
Low ESL Capacitors  
Application Guide

Reliability Test Conditions  
Packaging Specifications  
Caution/Notice  
Disclaimer & Limitation of Use and Applications  
Component Sales Offices/  
Manufacturing Sites

# Explanation of Ceramic Capacitors

## High Bending Strength Capacitors

More Resistant to stress caused by board bending

High-bending  
Strength

## Low Acoustic Noise Capacitors

A solution that effectively reduces audible noise

Low Acoustic  
Noise

## Low ESL Capacitors

Space Saving & High Speed Energy Transfer

Low ESL

# Part Numbering



## 1 SERIES CODE

CL = Multilayer Ceramic Capacitors

## 2 SIZE CODE

| Code | inch/mm     | Code | inch/mm   | Code | inch/mm   | Code | inch/mm   |
|------|-------------|------|-----------|------|-----------|------|-----------|
| R1   | 008004/0201 | 10   | 0603/1608 | 42   | 1808/4520 | L6   | 0304/0610 |
| 02   | 01005/0402  | 21   | 0805/2012 | 43   | 1812/4532 | 01   | 0306/0816 |
| 03   | 0201/0603   | 31   | 1206/3216 | 55   | 2220/5750 | 19   | 0503/1209 |
| 05   | 0402/1005   | 32   | 1210/3225 | L5   | 0204/0510 |      |           |

## 3 DIELECTRIC CODE

Class I (Temperature Compensation)

| Symbol | EIA Code | Operation Temperature Range (°C) | Temperature Coefficient Range (ppm/°C) |
|--------|----------|----------------------------------|----------------------------------------|
| C      | C0G      | -55 ~ +125                       | 0 ± 30                                 |
| G      | X8G      | -55 ~ +150                       | 0 ± 30                                 |

Class II (High Dielectric Constant)

| Symbol | EIA Code | Operation Temperature Range (°C) | Capacitance Change (ΔC %) |
|--------|----------|----------------------------------|---------------------------|
| A      | X5R      | -55 ~ +85                        | ±15                       |
| X      | X6S      | -55 ~ +105                       | ±22                       |
| W      | X6T      | -55 ~ +105                       | -33 ~ +22                 |
| B      | X7R      | -55 ~ +125                       | ±15                       |
| K      | *X7R(S)  | -55 ~ +125                       | ±15                       |
| Y      | X7S      | -55 ~ +125                       | ±22                       |
| Z      | X7T      | -55 ~ +125                       | -33 ~ +22                 |
| F      | Y5V      | -30 ~ +85                        | -82 ~ +22                 |
| M      | X8M      | -55 ~ +150                       | -50 ~ +50                 |
| E      | X8L      | -55 ~ +150                       | -40 ~ +15                 |
| J      | JIS-B    | -25 ~ +85                        | ±10                       |

\* X7R(S) = X7R (DC Bias 0.5Vr TCC)

## 4 CAPACITANCE CODE

Capacitance expressed in pF. 2 significant digits plus number of zeros.  
example) 106=10×10<sup>6</sup>=10,000,000pF

For Values < 10pF, Letter R denotes decimal point  
example) 1R5 = 1.5pF

## 5 CAPACITANCE TOLERANCE CODE

| Code | Tolerance | Code | Tolerance | Code | Tolerance | Code | Tolerance |
|------|-----------|------|-----------|------|-----------|------|-----------|
| N    | ±0.03pF   | H    | + 0.25pF  | F    | ±1%       | V    | - 5%      |
| A    | ±0.05pF   | L    | - 0.25pF  | G    | ±2%       | K    | ±10%      |
| B    | ±0.1pF    | D    | ±0.5pF    | J    | ±5%       | M    | ±20%      |
| C    | ±0.25pF   | F*   | ±1pF      | U    | + 5%      | Z    | -20, +80% |

\* For Values < 10pF, F=±1pF / Values≥10pF, F=±1%



# Part Numbering

| Series | Nominal Capacitance |     |     |     |     |     |     |     |     |     |     |     |
|--------|---------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| E-3    | 1.0                 |     |     |     | 2.2 |     |     |     | 4.7 |     |     |     |
| E-6    | 1.0                 |     | 1.5 |     | 2.2 |     | 3.3 |     | 4.7 |     | 6.8 |     |
| E-12   | 1.0                 | 1.2 | 1.5 | 1.8 | 2.2 | 2.7 | 3.3 | 3.9 | 4.7 | 5.6 | 6.8 | 8.2 |
| E-24   | 1.0                 | 1.2 | 1.5 | 1.8 | 2.2 | 2.7 | 3.3 | 3.9 | 4.7 | 5.6 | 6.8 | 8.2 |
|        | 1.1                 | 1.3 | 1.6 | 2.0 | 2.4 | 3.0 | 3.6 | 4.3 | 5.1 | 6.2 | 7.5 | 9.1 |

## 6 RATED VOLTAGE CODE

| Code | Voltage | Code | Voltage | Code | Voltage | Code | Voltage |
|------|---------|------|---------|------|---------|------|---------|
| S    | 2.5Vdc  | O    | 16Vdc   | C    | 100Vdc  | G    | 500Vdc  |
| R    | 4.0Vdc  | A    | 25Vdc   | D    | 200Vdc  | H    | 630Vdc  |
| Q    | 6.3Vdc  | L    | 35Vdc   | E    | 250Vdc  | I    | 1kVdc   |
| P    | 10Vdc   | B    | 50Vdc   | F    | 350Vdc  | J    | 2kVdc   |
|      |         |      |         |      |         | K    | 3kVdc   |

## 7 THICKNESS CODE

| Size Code (inch/mm) | Code | Thickness | Tolerance  | Size Code (inch/mm) | Code      | Thickness | Tolerance |
|---------------------|------|-----------|------------|---------------------|-----------|-----------|-----------|
| 01005/0402          | 2    | 0.20      | ±0.02      | 1210/3225           | C         | 0.85      | ±0.10*    |
| 0201/0603           | 3    | 0.30      | ±0.03      |                     | 9         | 0.90      | ±0.10*    |
| 0402/1005           | 3    | 0.30      | ±0.03*     |                     | F         | 1.25      | ±0.20     |
|                     | 5    | 0.50      | ±0.05      |                     | S         | 1.35      | ±0.15*    |
| 0603/1608           | 5    | 0.50      | +0.0/-0.1* |                     | H         | 1.60      | ±0.20     |
|                     | 8    | 0.80      | ±0.10      |                     | U         | 1.80      | ±0.20*    |
| 0805/2012           | A    | 0.65      | ±0.10      |                     | I         | 2.00      | ±0.20     |
|                     | C    | 0.85      | ±0.10*     |                     | J         | 2.50      | ±0.20     |
|                     | C    | 0.85      | ±0.10      |                     | V         | 2.50      | ±0.30     |
|                     | M    | 1.15      | ±0.10      |                     | 1808/4520 | F         | 1.25      |
|                     | F    | 1.25      | ±0.10      | G                   |           | 1.40      | ±0.20     |
|                     | Q    | 1.25      | ±0.15      | I                   |           | 2.00      | ±0.20     |
| 1206/3216           | Y    | 1.25      | ±0.20      | 1812/4532           | F         | 1.25      | ±0.20     |
|                     | C    | 0.85      | ±0.15      |                     | H         | 1.60      | ±0.20     |
|                     | C    | 0.85      | ±0.10*     |                     | I         | 2.00      | ±0.20     |
|                     | E    | 1.10      | ±0.15      |                     | J         | 2.50      | ±0.20     |
|                     | E    | 1.10      | ±0.10*     | L                   | 3.20      | ±0.30     |           |
|                     | P    | 1.15      | ±0.10*     | 2220/5750           | H         | 1.60      | ±0.20     |
|                     | M    | 1.15      | ±0.15      |                     | I         | 2.00      | ±0.20     |
|                     | F    | 1.25      | ±0.15      |                     | J         | 2.50      | ±0.20     |
| H                   | 1.6  | ±0.20     | L          |                     | 3.20      | ±0.30     |           |

\* Mark is only applicable to "L","Y","F", 12th code in part number.

# Part Numbering

## 8 INNER ELECTRODE/TERMINATION/PLATING CODE

| Code | Thickness division | Inner electrode | Termination  | Plating material |
|------|--------------------|-----------------|--------------|------------------|
| N    | Normal             | Ni              | Cu           | Ni / Sn _100%    |
| G    | Normal             | Cu              | Cu           | Ni / Sn _100%    |
| S    | Normal             | Ni              | Metal Epoxy  | Ni / Sn _100%    |
| C    | Normal             | Ni              | Control Code | Ni / Sn _100%    |
| L    | Low profile        | Ni              | Cu           | Ni / Sn _100%    |
| Y    | Low profile        | Ni              | Metal Epoxy  | Ni / Sn _100%    |
| Z    | Normal             | Ni              | Metal Epoxy  | Ni / Sn _100%    |
| F    | Low profile        | Ni              | Metal Epoxy  | Ni / Sn _100%    |

## 9 PRODUCT CODE OR SIZE CONTROL CODE

N=Normal

A=Array (2-element)

B=Array (4-element)

L=LICC (Low Inductance Ceramic Capacitor)

J=SLIC (Super Low Inductance Capacitor)

(Unit : inch/mm)

| Code | Size | 01005/0402 | 0201/0603 | 0402/1005 | 0603/1608 | 0805/2012 | 1206/3216 |
|------|------|------------|-----------|-----------|-----------|-----------|-----------|
| S    |      | ±0.03      | ±0.05     | ±0.07     | ±0.07     |           | ±0.30     |
| Q    |      | ±0.05      | ±0.07     | ±0.10     | ±0.15     | ±0.15     |           |
| R    |      | ±0.07      | ±0.09     | ±0.15     | ±0.20     | ±0.20     |           |
| U    |      | ±0.09      |           | ±0.20     | ±0.25     | ±0.25     |           |
| Z    |      |            |           | ±0.40     | ±0.30     | ±0.30     |           |
| 9    |      |            |           | ±0.30     |           |           |           |

## 10 CONTROL CODE

N= Reserved for future use

## 11 PACKAGING CODE

### Cardboard Tape (paper)

| Code  | Taping Type                         |
|-------|-------------------------------------|
| 8/C/H | Normal, 7"reel (Quantity option)    |
| J     | 1mm Pitch, 7"reel                   |
| Z     | Chip aligned for horizontal, 7"reel |
| Y     | Chip aligned for vertical, 7"reel   |
| O     | Normal, 10"reel                     |
| 3/D/L | Normal, 13"reel (Quantity option)   |
| 2     | 1mm Pitch, 13"reel                  |
| 7     | Chip aligned for vertical, 13"reel  |

### Embossed Tape (plastic)

| Code | Taping Type                         |
|------|-------------------------------------|
| E/G  | Normal, 7"reel (Quantity option)    |
| R    | Chip aligned for horizontal, 7"reel |
| W    | Chip aligned for vertical, 7"reel   |
| S    | Normal, 10"reel                     |
| F    | Normal, 13"reel (Quantity option)   |



# Reliability Level Description

| Reliability Level      | Standard                   | High Level I               | High Level II              | AEC-Q200                         |
|------------------------|----------------------------|----------------------------|----------------------------|----------------------------------|
| AEC-Q200               | N/A                        | N/A                        | N/A                        | Guarantee                        |
| Humidity Test          | 40°C, 95%RH,<br>1Vr, 500h  | 65°C, 90%RH,<br>1Vr, 500h  | 85°C, 85%RH,<br>1Vr, 1000h | 85°C, 85%RH,<br>1.3~1.5Vr, 1000h |
| High Temp Load<br>Test | Max. Temp,<br>1.0Vr, 1000h | Max. Temp,<br>1.5Vr, 1000h | Max. Temp,<br>1.5Vr, 1000h | Max. Temp,<br>2Vr, 1000h         |
| Board Flex             | 1mm                        | 1mm                        | 2mm                        | 2mm                              |
| Temp. Cycling          | 5cycle                     | 5cycle                     | 1000cycle                  | 1000cycle                        |

- \* 1. The part marked 'derating' is less than 150% of rated voltage in the durability and operational life test.
- \* 2. perform 2mm bending outgoing test.
- \* 3. Some of the parts are applicable in rated voltage × 150% or × 120%. Please refer to individual specifications.
- \* 4. Some of parts are 3mm bending guaranteed. Please refer to individual specifications.

# Normal Capacitors\_Standard

Normal  
Standard

## Features

- A Normal MLCC temporarily charges and reduces noise in electronic circuits, and is the most broadly available chip-type capacitor.
- The product line allows realization of various sizes and a wide range of capacitance.
- It also has the structural capacity to mount chips on a PCB at a high speed.



- ① Ceramic Body
- ② Electrode (Ni/Cu\*)
- ③ Plating (Ni)
- ④ Termination (Cu or Cu+Metal Epoxy)
- ⑤ Plating (Sn)

\* Internal Cu electrode is only applied to limited products.

### Wide Selection of Size & Wide Capacitance Range

Products offered with various sizes and a wide range of capacities

### Excellent DC Bias Characteristics

Capacitor with Excellent DC Bias Characteristics

### High Speed Automatic Chip Placement on PCBs

Chip Mountable on PCB at High Speed

## Application

- Smart Phone, PC, HDD/SSD Board, Tablet, Display, Game Machine, DC-DC Converter

## Structure and Dimensions



| Size Code | Dimension (mm) |            |            |           | EIA (inch) |
|-----------|----------------|------------|------------|-----------|------------|
|           | L              | W          | T          | BW        |            |
| 02        | 0.40±0.02      | 0.20±0.02  | 0.20±0.02  | 0.1±0.03  | 01005      |
| 05025     | 0.50±0.025     | 0.25±0.025 | 0.25±0.025 | 0.13±0.04 | 015008     |
| 03        | 0.60±0.03      | 0.30±0.03  | 0.30±0.03  | 0.15±0.05 | 0201       |
|           | 0.60±0.05      | 0.30±0.05  | 0.30±0.05  |           |            |
|           | 0.60±0.09      | 0.30±0.09  | 0.50±0.05  |           |            |
|           | 0.60±0.09      | 0.30±0.09  | 0.30±0.09  |           |            |
| 05        | 1.00±0.05      | 0.50±0.05  | 0.50±0.05  | 0.25±0.10 | 0402       |
|           | 1.00±0.05      | 0.50±0.05  | 0.30±0.03  |           |            |
|           | 1.00±0.05      | 0.50±0.05  | 0.20±0.02  |           |            |
|           | 1.00±0.07      | 0.50±0.07  | 0.50±0.07  |           |            |
|           | 1.00±0.10      | 0.50±0.10  | 0.50±0.10  |           |            |
|           | 1.00±0.10      | 0.50±0.10  | 0.30±0.03  |           |            |
|           | 1.00±0.15      | 0.50±0.15  | 0.50±0.15  |           |            |
|           | 1.00±0.15      | 0.50±0.15  | 0.30±0.03  |           |            |
|           | 1.00±0.20      | 0.50±0.20  | 0.50±0.20  |           |            |
|           | 1.00±0.20      | 0.50±0.25  | 0.70±0.10  |           |            |
|           | 1.00±0.20      | 0.50±0.20  | 0.60±0.20  |           |            |
|           | 1.00±0.20      | 0.50±0.20  | 0.50±0.05  |           |            |
|           | 1.15±0.05      | 0.70±0.05  | 0.70±0.05  |           |            |



# Normal Capacitors\_Standard

| Size Code | Dimension (mm) |           |                 | BW           | EIA (inch) |
|-----------|----------------|-----------|-----------------|--------------|------------|
|           | L              | W         | T               |              |            |
| 10        | 1.60±0.10      | 0.80±0.10 | 0.80±0.10       | 0.30±0.20    | 0603       |
|           | 1.60±0.10      | 0.80±0.10 | 0.50+0.00/-0.10 |              |            |
|           | 1.60±0.15      | 0.80±0.15 | 0.80±0.15       |              |            |
|           | 1.60±0.20      | 0.80±0.20 | 0.80±0.20       |              |            |
|           | 1.60±0.20      | 0.80±0.20 | 0.80±0.20       |              |            |
|           | 1.60±0.20      | 0.80±0.20 | 0.70±0.20       |              |            |
|           | 1.60±0.25      | 0.80±0.25 | 0.70±0.10       |              |            |
|           | 1.60±0.25      | 0.80±0.25 | 0.80±0.25       |              |            |
|           | 1.60±0.30      | 0.80±0.30 | 0.70±0.10       |              |            |
|           | 1.60±0.30      | 0.80±0.30 | 0.80±0.30       |              |            |
|           | 1.60±0.30      | 0.80±0.30 | 0.50±0.30       |              |            |
| 21        | 1.80±0.10      | 1.00±0.10 | 0.70±0.10       | 0.5+0.2/-0.3 | 0805       |
|           | 2.00±0.10      | 1.25±0.10 | 0.65±0.10       |              |            |
|           | 2.00±0.10      | 1.25±0.10 | 0.85±0.10       |              |            |
|           | 2.00±0.10      | 1.25±0.10 | 0.90±0.10       |              |            |
|           | 2.00±0.10      | 1.25±0.10 | 1.25±0.10       |              |            |
|           | 2.00±0.15      | 1.25±0.15 | 0.85±0.10       |              |            |
|           | 2.00±0.15      | 1.25±0.15 | 1.25±0.15       |              |            |
|           | 2.00±0.20      | 1.25±0.20 | 0.70±0.10       |              |            |
|           | 2.00±0.20      | 1.25±0.20 | 0.80±0.10       |              |            |
|           | 2.00±0.20      | 1.25±0.20 | 0.85±0.10       |              |            |
|           | 2.00±0.20      | 1.25±0.20 | 0.90±0.10       |              |            |
| 31        | 2.00±0.20      | 1.25±0.20 | 1.10±0.10       | 0.50±0.30    | 1206       |
|           | 2.00±0.20      | 1.25±0.20 | 1.25±0.20       |              |            |
|           | 3.20±0.15      | 1.60±0.15 | 0.85±0.15       |              |            |
|           | 3.20±0.15      | 1.60±0.15 | 1.25±0.15       |              |            |
|           | 3.20±0.20      | 1.60±0.20 | 0.85±0.10       |              |            |
|           | 3.20±0.20      | 1.60±0.20 | 0.90±0.10       |              |            |
| 32        | 3.20±0.20      | 1.60±0.20 | 1.15±0.10       | 0.60±0.30    | 1210       |
|           | 3.20±0.20      | 1.60±0.20 | 1.15±0.15       |              |            |
|           | 3.20±0.20      | 1.60±0.20 | 1.60±0.20       |              |            |
|           | 3.20±0.30      | 2.50±0.20 | 0.85±0.10       |              |            |
|           | 3.20±0.30      | 2.50±0.20 | 1.25±0.20       |              |            |
|           | 3.20±0.30      | 2.50±0.20 | 1.35±0.15       |              |            |
|           | 3.20±0.30      | 2.50±0.20 | 1.40±0.20       |              |            |
|           | 3.20±0.30      | 2.50±0.20 | 1.60±0.10       |              |            |
|           | 3.20±0.30      | 2.50±0.20 | 1.60±0.20       |              |            |
|           | 3.20±0.30      | 2.50±0.20 | 1.80±0.20       |              |            |
| 43        | 3.20±0.30      | 2.50±0.20 | 2.50±0.20       | 0.80±0.30    | 1812       |
|           | 3.20±0.30      | 2.50±0.20 | 2.00±0.20       |              |            |
|           | 3.20±0.40      | 2.50±0.30 | 2.50±0.20       |              |            |
|           | 3.20±0.40      | 2.50±0.30 | 2.50±0.30       |              |            |
|           | 4.50±0.40      | 3.20±0.30 | 1.60±0.20       |              |            |



# Normal Capacitors\_Standard

## Capacitance Table (COG)

| Category | TCC         | Size Code (inch/mm) | Rated Voltage (Vdc) | Capacitance |   |    |     |   |    |     |   |    | Capacitance Range |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |              |               |               |               |             |
|----------|-------------|---------------------|---------------------|-------------|---|----|-----|---|----|-----|---|----|-------------------|-----|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--------------|---------------|---------------|---------------|-------------|
|          |             |                     |                     | pF          |   |    | nF  |   |    | uF  |   |    |                   |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |              |               |               |               |             |
|          |             |                     |                     | 0.1         | 1 | 10 | 100 | 1 | 10 | 100 | 1 | 10 |                   | 100 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |              |               |               |               |             |
| Normal   | COG (125°C) | 008004/0201         | 16                  | █           |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  | 0.2pF - 56pF |               |               |               |             |
|          |             |                     | 25                  | █           |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |              | 0.2pF - 56pF  |               |               |             |
|          |             | 01005/0402          | 6.3                 |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |              |               | 100pF - 100pF |               |             |
|          |             |                     | 10                  |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |              |               | 150pF - 150pF |               |             |
|          |             |                     | 16                  |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |              |               | 8.2pF - 150pF |               |             |
|          |             |                     | 25                  |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |              |               | 1pF - 220pF   |               |             |
|          |             | 0201/0603           | 50                  |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |              |               |               | 100pF - 100pF |             |
|          |             |                     | 25                  |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |              |               |               | 0.2pF - 100pF |             |
|          |             |                     | 100                 |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |              |               | 100pF - 100pF |               |             |
|          |             | 0402/1005           | 16                  |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |              |               |               | 100pF - 1nF   |             |
|          |             |                     | 25                  |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |              |               |               | 20pF - 1nF    |             |
|          |             |                     | 50                  |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |              |               |               | 1pF - 4.7nF   |             |
|          |             |                     | 100                 |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |              |               |               | 12pF - 1nF    |             |
|          |             | 0603/1608           | 16                  |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |              |               |               | 1nF - 2.2nF   |             |
|          |             |                     | 25                  |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |              |               |               | 560pF - 4.7nF |             |
|          |             |                     | 50                  |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |              |               |               | 4.7pF - 5.6nF |             |
|          |             |                     | 100                 |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |              |               |               | 10pF - 3.9nF  |             |
|          |             |                     | 200                 |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |              |               |               | 220pF - 220pF |             |
|          |             | 0805/2012           | 250                 |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |              |               |               | 470pF - 470pF |             |
|          |             |                     | 25                  |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |              |               |               | 3.3nF - 10nF  |             |
|          |             |                     | 50                  |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |              |               |               | 10pF - 15nF   |             |
|          |             |                     | 100                 |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |              |               |               | 12pF - 3.9nF  |             |
|          |             |                     | 200                 |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |              |               |               | 18pF - 1nF    |             |
|          |             | 1206/3216           | 250                 |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |              |               |               | 1nF - 10nF    |             |
|          |             |                     | 16                  |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |              |               |               | 15nF - 120nF  |             |
|          |             |                     | 25                  |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |              |               |               | 10nF - 100nF  |             |
|          |             |                     | 50                  |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |              |               |               |               | 10pF - 47nF |
|          |             |                     | 100                 |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |              |               |               | 20pF - 22nF   |             |
|          |             |                     | 200                 |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |              |               |               | 220pF - 1nF   |             |
|          |             |                     | 250                 |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |              |               |               | 2.2nF - 22nF  |             |
|          |             |                     | 500                 |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |              |               |               | 10pF - 2.2nF  |             |
|          |             |                     | 630                 |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |              |               |               |               | 10pF - 10nF |
|          |             |                     | 1000                |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |              |               |               |               | 10pF - 1nF  |
|          |             | 2000                |                     |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |              |               |               | 15pF - 100pF  |             |
|          |             | 1210/3225           | 25                  |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |              |               |               | 10nF - 10nF   |             |
|          |             |                     | 50                  |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |              |               |               | 1.8nF - 22nF  |             |
| 100      |             |                     |                     |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |              | 33nF - 47nF   |               |               |             |
| 500      |             |                     |                     |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |              | 680pF - 1.8nF |               |               |             |
| 630      |             |                     |                     |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |              | 1.8nF - 33nF  |               |               |             |
| 2000     |             |                     |                     |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |              | 100pF - 100pF |               |               |             |






# Normal Capacitors\_Standard

## Capacitance Table (X7R)

| Category | TCC         | Size Code (inch/mm) | Rated Voltage (Vdc) | Capacitance |     |    |     |   |    |     |   |    | Capacitance Range |     |             |               |               |               |
|----------|-------------|---------------------|---------------------|-------------|-----|----|-----|---|----|-----|---|----|-------------------|-----|-------------|---------------|---------------|---------------|
|          |             |                     |                     | pF          |     |    | nF  |   |    | uF  |   |    |                   |     |             |               |               |               |
|          |             |                     |                     | 0.1         | 1   | 10 | 100 | 1 | 10 | 100 | 1 | 10 |                   | 100 |             |               |               |               |
| Normal   | X7R (125°C) | 01005/0402          | 10                  |             |     |    |     |   |    |     |   |    |                   |     | 100pF - 1nF |               |               |               |
|          |             |                     | 16                  |             |     |    |     |   |    |     |   |    |                   |     |             | 330pF - 330pF |               |               |
|          |             | 0201/0603           | 6.3                 |             |     |    |     |   |    |     |   |    |                   |     |             |               | 2.2nF - 10nF  |               |
|          |             |                     | 10                  |             |     |    |     |   |    |     |   |    |                   |     |             |               | 1nF - 100nF   |               |
|          |             |                     | 16                  |             |     |    |     |   |    |     |   |    |                   |     |             |               | 150pF - 10nF  |               |
|          |             | 0402/1005           | 25                  |             |     |    |     |   |    |     |   |    |                   |     |             |               | 120pF - 1.8nF |               |
|          |             |                     | 6.3                 |             |     |    |     |   |    |     |   |    |                   |     |             |               | 100nF - 1uF   |               |
|          |             |                     | 10                  |             |     |    |     |   |    |     |   |    |                   |     |             |               | 22nF - 470nF  |               |
|          |             |                     | 16                  |             |     |    |     |   |    |     |   |    |                   |     |             |               | 820pF - 220nF |               |
|          |             |                     | 25                  |             |     |    |     |   |    |     |   |    |                   |     |             |               | 560pF - 220nF |               |
|          |             | 0603/1608           | 50                  |             |     |    |     |   |    |     |   |    |                   |     |             |               | 150pF - 100nF |               |
|          |             |                     | 100                 |             |     |    |     |   |    |     |   |    |                   |     |             |               | 220pF - 220pF |               |
|          |             |                     | 6.3                 |             |     |    |     |   |    |     |   |    |                   |     |             |               | 470nF - 10uF  |               |
|          |             |                     | 10                  |             |     |    |     |   |    |     |   |    |                   |     |             |               | 220nF - 2.2uF |               |
|          |             |                     | 16                  |             |     |    |     |   |    |     |   |    |                   |     |             |               | 10nF - 1uF    |               |
|          |             | 0805/2012           | 25                  |             |     |    |     |   |    |     |   |    |                   |     |             |               | 4.7nF - 1uF   |               |
|          |             |                     | 50                  |             |     |    |     |   |    |     |   |    |                   |     |             |               | 100pF - 1uF   |               |
|          |             |                     | 100                 |             |     |    |     |   |    |     |   |    |                   |     |             |               | 1nF - 100nF   |               |
|          |             |                     | 6.3                 |             |     |    |     |   |    |     |   |    |                   |     |             |               | 10uF - 10uF   |               |
|          |             |                     | 10                  |             |     |    |     |   |    |     |   |    |                   |     |             |               | 680nF - 10uF  |               |
|          |             | 1206/3216           | 16                  |             |     |    |     |   |    |     |   |    |                   |     |             |               | 100nF - 10uF  |               |
|          |             |                     | 25                  |             |     |    |     |   |    |     |   |    |                   |     |             |               | 1nF - 4.7uF   |               |
|          |             |                     | 50                  |             |     |    |     |   |    |     |   |    |                   |     |             |               | 100pF - 1uF   |               |
|          |             |                     | 100                 |             |     |    |     |   |    |     |   |    |                   |     |             |               | 220pF - 220nF |               |
|          |             |                     | 200                 |             |     |    |     |   |    |     |   |    |                   |     |             |               | 220pF - 10nF  |               |
|          |             | 1210/3225           | 250                 |             |     |    |     |   |    |     |   |    |                   |     |             |               | 1nF - 10nF    |               |
|          |             |                     | 6.3                 |             |     |    |     |   |    |     |   |    |                   |     |             |               | 10uF - 22uF   |               |
|          |             |                     | 10                  |             |     |    |     |   |    |     |   |    |                   |     |             |               | 1.2uF - 22uF  |               |
|          |             |                     | 16                  |             |     |    |     |   |    |     |   |    |                   |     |             |               | 330nF - 10uF  |               |
|          |             |                     | 25                  |             |     |    |     |   |    |     |   |    |                   |     |             |               | 220nF - 10uF  |               |
|          |             |                     | 35                  |             |     |    |     |   |    |     |   |    |                   |     |             |               | 10uF - 10uF   |               |
|          |             |                     | 50                  |             |     |    |     |   |    |     |   |    |                   |     |             |               | 220pF - 10uF  |               |
|          |             |                     | 100                 |             |     |    |     |   |    |     |   |    |                   |     |             |               | 2.2nF - 2.2uF |               |
|          |             |                     | 200                 |             |     |    |     |   |    |     |   |    |                   |     |             |               | 470pF - 100nF |               |
|          |             |                     | 250                 |             |     |    |     |   |    |     |   |    |                   |     |             |               | 33nF - 100nF  |               |
|          |             |                     | 350                 |             |     |    |     |   |    |     |   |    |                   |     |             |               | 33nF - 33nF   |               |
|          |             | 1210/3225           | 500                 |             |     |    |     |   |    |     |   |    |                   |     |             |               | 220pF - 33nF  |               |
|          |             |                     | 630                 |             |     |    |     |   |    |     |   |    |                   |     |             |               | 330pF - 33nF  |               |
|          |             |                     | 1000                |             |     |    |     |   |    |     |   |    |                   |     |             |               | 680pF - 2.2nF |               |
|          |             |                     | 2000                |             |     |    |     |   |    |     |   |    |                   |     |             |               | 1nF - 1nF     |               |
|          |             |                     | 6.3                 |             |     |    |     |   |    |     |   |    |                   |     |             |               | 47uF - 47uF   |               |
|          |             |                     | 10                  |             |     |    |     |   |    |     |   |    |                   |     |             |               | 10uF - 47uF   |               |
|          |             |                     | 16                  |             |     |    |     |   |    |     |   |    |                   |     |             |               | 10uF - 22uF   |               |
|          |             |                     | 25                  |             |     |    |     |   |    |     |   |    |                   |     |             |               | 1uF - 22uF    |               |
|          |             | *X7R(S)<br>(125°C)  | 0603/1608           | 16          | 35  |    |     |   |    |     |   |    |                   |     |             |               | 10uF - 10uF   |               |
|          |             |                     |                     |             | 50  |    |     |   |    |     |   |    |                   |     |             |               | 150nF - 10uF  |               |
|          |             |                     |                     |             | 100 |    |     |   |    |     |   |    |                   |     |             |               | 1uF - 2.2uF   |               |
|          |             |                     |                     |             | 250 |    |     |   |    |     |   |    |                   |     |             |               |               | 100nF - 100nF |
|          |             |                     |                     |             | 500 |    |     |   |    |     |   |    |                   |     |             |               |               | 10nF - 10nF   |
|          |             |                     |                     |             | 500 |    |     |   |    |     |   |    |                   |     |             |               |               | 10uF - 10uF   |

\* X7R(S) = X7R (DC Bias 0.5Vr TCC)



# Normal Capacitors\_Standard

## Capacitance Table (X7S)

| Category | TCC         | Size Code (inch/mm) | Rated Voltage (Vdc) | Capacitance |   |    |     |   |    |     |   |    | Capacitance Range |     |  |               |               |
|----------|-------------|---------------------|---------------------|-------------|---|----|-----|---|----|-----|---|----|-------------------|-----|--|---------------|---------------|
|          |             |                     |                     | pF          |   |    | nF  |   |    | uF  |   |    |                   |     |  |               |               |
|          |             |                     |                     | 0.1         | 1 | 10 | 100 | 1 | 10 | 100 | 1 | 10 |                   | 100 |  |               |               |
| Normal   | X7S (125°C) | 0201/0603           | 10                  |             |   |    |     |   |    |     |   |    |                   |     |  | 100nF - 100nF |               |
|          |             |                     | 16                  |             |   |    |     |   |    |     |   |    |                   |     |  |               | 100nF - 100nF |
|          |             | 0603/1608           | 6.3                 |             |   |    |     |   |    |     |   |    |                   |     |  |               | 10uF - 10uF   |
|          |             | 0805/2012           | 25                  |             |   |    |     |   |    |     |   |    |                   |     |  |               | 4.7uF - 4.7uF |

## Capacitance Table (X7T)

| Category | TCC         | Size Code (inch/mm) | Rated Voltage (Vdc) | Capacitance |   |    |     |   |    |     |   |    | Capacitance Range |     |  |               |             |             |
|----------|-------------|---------------------|---------------------|-------------|---|----|-----|---|----|-----|---|----|-------------------|-----|--|---------------|-------------|-------------|
|          |             |                     |                     | pF          |   |    | nF  |   |    | uF  |   |    |                   |     |  |               |             |             |
|          |             |                     |                     | 0.1         | 1 | 10 | 100 | 1 | 10 | 100 | 1 | 10 |                   | 100 |  |               |             |             |
| Normal   | X7T (125°C) | 0201/0603           | 6.3                 |             |   |    |     |   |    |     |   |    |                   |     |  | 220nF - 220nF |             |             |
|          |             |                     | 4                   |             |   |    |     |   |    |     |   |    |                   |     |  |               | 10uF - 10uF |             |
|          |             | 0805/2012           | 6.3                 |             |   |    |     |   |    |     |   |    |                   |     |  |               |             | 22uF - 22uF |
|          |             |                     | 25                  |             |   |    |     |   |    |     |   |    |                   |     |  |               |             | 10uF - 10uF |
|          |             |                     | 35                  |             |   |    |     |   |    |     |   |    |                   |     |  |               |             | 10uF - 10uF |
|          |             |                     | 50                  |             |   |    |     |   |    |     |   |    |                   |     |  |               |             | 10uF - 10uF |

## Capacitance Table (Y5V)

| Category | TCC        | Size Code (inch/mm) | Rated Voltage (Vdc) | Capacitance |   |    |     |   |    |     |   |    | Capacitance Range |     |  |             |               |               |
|----------|------------|---------------------|---------------------|-------------|---|----|-----|---|----|-----|---|----|-------------------|-----|--|-------------|---------------|---------------|
|          |            |                     |                     | pF          |   |    | nF  |   |    | uF  |   |    |                   |     |  |             |               |               |
|          |            |                     |                     | 0.1         | 1 | 10 | 100 | 1 | 10 | 100 | 1 | 10 |                   | 100 |  |             |               |               |
| Normal   | Y5V (85°C) | 0402/1005           | 6.3                 |             |   |    |     |   |    |     |   |    |                   |     |  | 1uF - 1uF   |               |               |
|          |            |                     | 10                  |             |   |    |     |   |    |     |   |    |                   |     |  |             | 330nF - 470nF |               |
|          |            |                     | 16                  |             |   |    |     |   |    |     |   |    |                   |     |  |             |               | 22nF - 100nF  |
|          |            |                     | 25                  |             |   |    |     |   |    |     |   |    |                   |     |  |             |               | 22nF - 33nF   |
|          |            |                     | 50                  |             |   |    |     |   |    |     |   |    |                   |     |  |             |               | 15nF - 15nF   |
|          |            | 0603/1608           | 6.3                 |             |   |    |     |   |    |     |   |    |                   |     |  |             |               | 2.2uF - 2.2uF |
|          |            |                     | 10                  |             |   |    |     |   |    |     |   |    |                   |     |  |             |               | 2.2uF - 2.2uF |
|          |            |                     | 16                  |             |   |    |     |   |    |     |   |    |                   |     |  |             |               | 100nF - 330nF |
|          |            |                     | 25                  |             |   |    |     |   |    |     |   |    |                   |     |  |             |               | 100nF - 470nF |
|          |            |                     | 50                  |             |   |    |     |   |    |     |   |    |                   |     |  |             |               | 10nF - 100nF  |
|          |            | 0805/2012           | 6.3                 |             |   |    |     |   |    |     |   |    |                   |     |  |             |               | 10uF - 10uF   |
|          |            |                     | 10                  |             |   |    |     |   |    |     |   |    |                   |     |  |             |               | 2.2uF - 4.7uF |
|          |            |                     | 16                  |             |   |    |     |   |    |     |   |    |                   |     |  |             |               | 680nF - 2.2uF |
|          |            |                     | 25                  |             |   |    |     |   |    |     |   |    |                   |     |  |             |               | 100nF - 470nF |
|          |            |                     | 50                  |             |   |    |     |   |    |     |   |    |                   |     |  |             |               | 10nF - 1uF    |
|          |            | 1206/3216           | 10                  |             |   |    |     |   |    |     |   |    |                   |     |  |             |               | 10uF - 10uF   |
|          |            |                     | 16                  |             |   |    |     |   |    |     |   |    |                   |     |  |             |               | 1uF - 4.7uF   |
|          |            |                     | 25                  |             |   |    |     |   |    |     |   |    |                   |     |  |             |               | 1uF - 2.2uF   |
|          |            |                     | 50                  |             |   |    |     |   |    |     |   |    |                   |     |  |             |               | 100nF - 1uF   |
|          |            |                     | 16                  |             |   |    |     |   |    |     |   |    |                   |     |  |             |               | 10uF - 10uF   |
|          |            | 1210/3225           | 25                  |             |   |    |     |   |    |     |   |    |                   |     |  |             |               | 10uF - 10uF   |
| 35       |            |                     |                     |             |   |    |     |   |    |     |   |    |                   |     |  | 10uF - 10uF |               |               |
| 50       |            |                     |                     |             |   |    |     |   |    |     |   |    |                   |     |  | 1uF - 1uF   |               |               |
| 16       |            |                     |                     |             |   |    |     |   |    |     |   |    |                   |     |  | 10uF - 10uF |               |               |





# Normal Capacitors\_Standard

Size Code (inch/mm) : 008004/0201

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 26  | 0.138               | 16                  | COG | 1.8pF       | ±0.25pF               | CLR1C1R8CO1INN# |
| 27  | 0.138               | 16                  | COG | 1.9pF       | ±0.1pF                | CLR1C1R9BO1INN# |
| 28  | 0.138               | 16                  | COG | 1.9pF       | ±0.25pF               | CLR1C1R9CO1INN# |
| 29  | 0.138               | 16                  | COG | 2pF         | ±0.1pF                | CLR1C020BO1INN# |
| 30  | 0.138               | 16                  | COG | 2pF         | ±0.25pF               | CLR1C020CO1INN# |
| 31  | 0.138               | 16                  | COG | 2.1pF       | ±0.1pF                | CLR1C2R1BO1INN# |
| 32  | 0.138               | 16                  | COG | 2.1pF       | ±0.25pF               | CLR1C2R1CO1INN# |
| 33  | 0.138               | 16                  | COG | 2.2pF       | ±0.1pF                | CLR1C2R2BO1INN# |
| 34  | 0.138               | 16                  | COG | 2.2pF       | ±0.25pF               | CLR1C2R2CO1INN# |
| 35  | 0.138               | 16                  | COG | 2.3pF       | ±0.1pF                | CLR1C2R3BO1INN# |
| 36  | 0.138               | 16                  | COG | 2.3pF       | ±0.25pF               | CLR1C2R3CO1INN# |
| 37  | 0.138               | 16                  | COG | 2.4pF       | ±0.1pF                | CLR1C2R4BO1INN# |
| 38  | 0.138               | 16                  | COG | 2.4pF       | ±0.25pF               | CLR1C2R4CO1INN# |
| 39  | 0.138               | 16                  | COG | 2.5pF       | ±0.1pF                | CLR1C2R5BO1INN# |
| 40  | 0.138               | 16                  | COG | 2.5pF       | ±0.25pF               | CLR1C2R5CO1INN# |
| 41  | 0.138               | 16                  | COG | 2.6pF       | ±0.1pF                | CLR1C2R6BO1INN# |
| 42  | 0.138               | 16                  | COG | 2.6pF       | ±0.25pF               | CLR1C2R6CO1INN# |
| 43  | 0.138               | 16                  | COG | 2.7pF       | ±0.1pF                | CLR1C2R7BO1INN# |
| 44  | 0.138               | 16                  | COG | 2.7pF       | ±0.25pF               | CLR1C2R7CO1INN# |
| 45  | 0.138               | 16                  | COG | 2.8pF       | ±0.1pF                | CLR1C2R8BO1INN# |
| 46  | 0.138               | 16                  | COG | 2.8pF       | ±0.25pF               | CLR1C2R8CO1INN# |
| 47  | 0.138               | 16                  | COG | 2.9pF       | ±0.1pF                | CLR1C2R9BO1INN# |
| 48  | 0.138               | 16                  | COG | 2.9pF       | ±0.25pF               | CLR1C2R9CO1INN# |
| 49  | 0.138               | 16                  | COG | 3pF         | ±0.1pF                | CLR1C030BO1INN# |
| 50  | 0.138               | 16                  | COG | 3pF         | ±0.25pF               | CLR1C030CO1INN# |
| 51  | 0.138               | 16                  | COG | 3.1pF       | ±0.1pF                | CLR1C3R1BO1INN# |
| 52  | 0.138               | 16                  | COG | 3.1pF       | ±0.25pF               | CLR1C3R1CO1INN# |
| 53  | 0.138               | 16                  | COG | 3.2pF       | ±0.1pF                | CLR1C3R2BO1INN# |
| 54  | 0.138               | 16                  | COG | 3.2pF       | ±0.25pF               | CLR1C3R2CO1INN# |
| 55  | 0.138               | 16                  | COG | 3.3pF       | ±0.1pF                | CLR1C3R3BO1INN# |
| 56  | 0.138               | 16                  | COG | 3.3pF       | ±0.25pF               | CLR1C3R3CO1INN# |
| 57  | 0.138               | 16                  | COG | 3.4pF       | ±0.1pF                | CLR1C3R4BO1INN# |
| 58  | 0.138               | 16                  | COG | 3.4pF       | ±0.25pF               | CLR1C3R4CO1INN# |
| 59  | 0.138               | 16                  | COG | 3.5pF       | ±0.1pF                | CLR1C3R5BO1INN# |
| 60  | 0.138               | 16                  | COG | 3.5pF       | ±0.25pF               | CLR1C3R5CO1INN# |
| 61  | 0.138               | 16                  | COG | 3.6pF       | ±0.1pF                | CLR1C3R6BO1INN# |
| 62  | 0.138               | 16                  | COG | 3.6pF       | ±0.25pF               | CLR1C3R6CO1INN# |
| 63  | 0.138               | 16                  | COG | 3.7pF       | ±0.1pF                | CLR1C3R7BO1INN# |
| 64  | 0.138               | 16                  | COG | 3.7pF       | ±0.25pF               | CLR1C3R7CO1INN# |
| 65  | 0.138               | 16                  | COG | 3.8pF       | ±0.1pF                | CLR1C3R8BO1INN# |
| 66  | 0.138               | 16                  | COG | 3.8pF       | ±0.25pF               | CLR1C3R8CO1INN# |
| 67  | 0.138               | 16                  | COG | 3.9pF       | ±0.1pF                | CLR1C3R9BO1INN# |
| 68  | 0.138               | 16                  | COG | 3.9pF       | ±0.25pF               | CLR1C3R9CO1INN# |
| 69  | 0.138               | 16                  | COG | 4pF         | ±0.1pF                | CLR1C040BO1INN# |
| 70  | 0.138               | 16                  | COG | 4pF         | ±0.25pF               | CLR1C040CO1INN# |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 008004/0201

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 71  | 0.138               | 16                  | COG | 4.1pF       | ±0.1pF                | CLR1C4R1B01INN# |
| 72  | 0.138               | 16                  | COG | 4.1pF       | ±0.25pF               | CLR1C4R1C01INN# |
| 73  | 0.138               | 16                  | COG | 4.2pF       | ±0.1pF                | CLR1C4R2B01INN# |
| 74  | 0.138               | 16                  | COG | 4.2pF       | ±0.25pF               | CLR1C4R2C01INN# |
| 75  | 0.138               | 16                  | COG | 4.3pF       | ±0.1pF                | CLR1C4R3B01INN# |
| 76  | 0.138               | 16                  | COG | 4.3pF       | ±0.25pF               | CLR1C4R3C01INN# |
| 77  | 0.138               | 16                  | COG | 4.4pF       | ±0.1pF                | CLR1C4R4B01INN# |
| 78  | 0.138               | 16                  | COG | 4.4pF       | ±0.25pF               | CLR1C4R4C01INN# |
| 79  | 0.138               | 16                  | COG | 4.5pF       | ±0.1pF                | CLR1C4R5B01INN# |
| 80  | 0.138               | 16                  | COG | 4.5pF       | ±0.25pF               | CLR1C4R5C01INN# |
| 81  | 0.138               | 16                  | COG | 4.6pF       | ±0.1pF                | CLR1C4R6B01INN# |
| 82  | 0.138               | 16                  | COG | 4.6pF       | ±0.25pF               | CLR1C4R6C01INN# |
| 83  | 0.138               | 16                  | COG | 4.7pF       | ±0.1pF                | CLR1C4R7B01INN# |
| 84  | 0.138               | 16                  | COG | 4.7pF       | ±0.25pF               | CLR1C4R7C01INN# |
| 85  | 0.138               | 16                  | COG | 4.8pF       | ±0.1pF                | CLR1C4R8B01INN# |
| 86  | 0.138               | 16                  | COG | 4.8pF       | ±0.25pF               | CLR1C4R8C01INN# |
| 87  | 0.138               | 16                  | COG | 4.9pF       | ±0.1pF                | CLR1C4R9B01INN# |
| 88  | 0.138               | 16                  | COG | 4.9pF       | ±0.25pF               | CLR1C4R9C01INN# |
| 89  | 0.138               | 16                  | COG | 5pF         | ±0.1pF                | CLR1C050B01INN# |
| 90  | 0.138               | 16                  | COG | 5pF         | ±0.25pF               | CLR1C050C01INN# |
| 91  | 0.138               | 16                  | COG | 5.1pF       | ±0.1pF                | CLR1C5R1B01INN# |
| 92  | 0.138               | 16                  | COG | 5.1pF       | ±0.25pF               | CLR1C5R1C01INN# |
| 93  | 0.138               | 16                  | COG | 5.1pF       | ±0.5pF                | CLR1C5R1D01INN# |
| 94  | 0.138               | 16                  | COG | 5.2pF       | ±0.1pF                | CLR1C5R2B01INN# |
| 95  | 0.138               | 16                  | COG | 5.2pF       | ±0.25pF               | CLR1C5R2C01INN# |
| 96  | 0.138               | 16                  | COG | 5.2pF       | ±0.5pF                | CLR1C5R2D01INN# |
| 97  | 0.138               | 16                  | COG | 5.3pF       | ±0.1pF                | CLR1C5R3B01INN# |
| 98  | 0.138               | 16                  | COG | 5.3pF       | ±0.25pF               | CLR1C5R3C01INN# |
| 99  | 0.138               | 16                  | COG | 5.3pF       | ±0.5pF                | CLR1C5R3D01INN# |
| 100 | 0.138               | 16                  | COG | 5.4pF       | ±0.1pF                | CLR1C5R4B01INN# |
| 101 | 0.138               | 16                  | COG | 5.4pF       | ±0.25pF               | CLR1C5R4C01INN# |
| 102 | 0.138               | 16                  | COG | 5.4pF       | ±0.5pF                | CLR1C5R4D01INN# |
| 103 | 0.138               | 16                  | COG | 5.5pF       | ±0.1pF                | CLR1C5R5B01INN# |
| 104 | 0.138               | 16                  | COG | 5.5pF       | ±0.25pF               | CLR1C5R5C01INN# |
| 105 | 0.138               | 16                  | COG | 5.5pF       | ±0.5pF                | CLR1C5R5D01INN# |
| 106 | 0.138               | 16                  | COG | 5.6pF       | ±0.1pF                | CLR1C5R6B01INN# |
| 107 | 0.138               | 16                  | COG | 5.6pF       | ±0.25pF               | CLR1C5R6C01INN# |
| 108 | 0.138               | 16                  | COG | 5.6pF       | ±0.5pF                | CLR1C5R6D01INN# |
| 109 | 0.138               | 16                  | COG | 5.7pF       | ±0.1pF                | CLR1C5R7B01INN# |
| 110 | 0.138               | 16                  | COG | 5.7pF       | ±0.25pF               | CLR1C5R7C01INN# |
| 111 | 0.138               | 16                  | COG | 5.7pF       | ±0.5pF                | CLR1C5R7D01INN# |
| 112 | 0.138               | 16                  | COG | 5.8pF       | ±0.1pF                | CLR1C5R8B01INN# |
| 113 | 0.138               | 16                  | COG | 5.8pF       | ±0.25pF               | CLR1C5R8C01INN# |
| 114 | 0.138               | 16                  | COG | 5.8pF       | ±0.5pF                | CLR1C5R8D01INN# |
| 115 | 0.138               | 16                  | COG | 5.9pF       | ±0.1pF                | CLR1C5R9B01INN# |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 008004/0201

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 116 | 0.138               | 16                  | COG | 5.9pF       | ±0.25pF               | CLR1C5R9C01INN# |
| 117 | 0.138               | 16                  | COG | 5.9pF       | ±0.5pF                | CLR1C5R9D01INN# |
| 118 | 0.138               | 16                  | COG | 6pF         | ±0.1pF                | CLR1C060B01INN# |
| 119 | 0.138               | 16                  | COG | 6pF         | ±0.25pF               | CLR1C060C01INN# |
| 120 | 0.138               | 16                  | COG | 6pF         | ±0.5pF                | CLR1C060D01INN# |
| 121 | 0.138               | 16                  | COG | 6.1pF       | ±0.1pF                | CLR1C6R1B01INN# |
| 122 | 0.138               | 16                  | COG | 6.1pF       | ±0.25pF               | CLR1C6R1C01INN# |
| 123 | 0.138               | 16                  | COG | 6.1pF       | ±0.5pF                | CLR1C6R1D01INN# |
| 124 | 0.138               | 16                  | COG | 6.2pF       | ±0.1pF                | CLR1C6R2B01INN# |
| 125 | 0.138               | 16                  | COG | 6.2pF       | ±0.25pF               | CLR1C6R2C01INN# |
| 126 | 0.138               | 16                  | COG | 6.2pF       | ±0.5pF                | CLR1C6R2D01INN# |
| 127 | 0.138               | 16                  | COG | 6.3pF       | ±0.1pF                | CLR1C6R3B01INN# |
| 128 | 0.138               | 16                  | COG | 6.3pF       | ±0.25pF               | CLR1C6R3C01INN# |
| 129 | 0.138               | 16                  | COG | 6.3pF       | ±0.5pF                | CLR1C6R3D01INN# |
| 130 | 0.138               | 16                  | COG | 6.4pF       | ±0.1pF                | CLR1C6R4B01INN# |
| 131 | 0.138               | 16                  | COG | 6.4pF       | ±0.25pF               | CLR1C6R4C01INN# |
| 132 | 0.138               | 16                  | COG | 6.4pF       | ±0.5pF                | CLR1C6R4D01INN# |
| 133 | 0.138               | 16                  | COG | 6.5pF       | ±0.1pF                | CLR1C6R5B01INN# |
| 134 | 0.138               | 16                  | COG | 6.5pF       | ±0.25pF               | CLR1C6R5C01INN# |
| 135 | 0.138               | 16                  | COG | 6.5pF       | ±0.5pF                | CLR1C6R5D01INN# |
| 136 | 0.138               | 16                  | COG | 6.6pF       | ±0.1pF                | CLR1C6R6B01INN# |
| 137 | 0.138               | 16                  | COG | 6.6pF       | ±0.25pF               | CLR1C6R6C01INN# |
| 138 | 0.138               | 16                  | COG | 6.6pF       | ±0.5pF                | CLR1C6R6D01INN# |
| 139 | 0.138               | 16                  | COG | 6.7pF       | ±0.1pF                | CLR1C6R7B01INN# |
| 140 | 0.138               | 16                  | COG | 6.7pF       | ±0.25pF               | CLR1C6R7C01INN# |
| 141 | 0.138               | 16                  | COG | 6.7pF       | ±0.5pF                | CLR1C6R7D01INN# |
| 142 | 0.138               | 16                  | COG | 6.8pF       | ±0.1pF                | CLR1C6R8B01INN# |
| 143 | 0.138               | 16                  | COG | 6.8pF       | ±0.25pF               | CLR1C6R8C01INN# |
| 144 | 0.138               | 16                  | COG | 6.8pF       | ±0.5pF                | CLR1C6R8D01INN# |
| 145 | 0.138               | 16                  | COG | 6.9pF       | ±0.1pF                | CLR1C6R9B01INN# |
| 146 | 0.138               | 16                  | COG | 6.9pF       | ±0.25pF               | CLR1C6R9C01INN# |
| 147 | 0.138               | 16                  | COG | 6.9pF       | ±0.5pF                | CLR1C6R9D01INN# |
| 148 | 0.138               | 16                  | COG | 7pF         | ±0.1pF                | CLR1C070B01INN# |
| 149 | 0.138               | 16                  | COG | 7pF         | ±0.25pF               | CLR1C070C01INN# |
| 150 | 0.138               | 16                  | COG | 7pF         | ±0.5pF                | CLR1C070D01INN# |
| 151 | 0.138               | 16                  | COG | 7.1pF       | ±0.1pF                | CLR1C7R1B01INN# |
| 152 | 0.138               | 16                  | COG | 7.1pF       | ±0.25pF               | CLR1C7R1C01INN# |
| 153 | 0.138               | 16                  | COG | 7.1pF       | ±0.5pF                | CLR1C7R1D01INN# |
| 154 | 0.138               | 16                  | COG | 7.2pF       | ±0.1pF                | CLR1C7R2B01INN# |
| 155 | 0.138               | 16                  | COG | 7.2pF       | ±0.25pF               | CLR1C7R2C01INN# |
| 156 | 0.138               | 16                  | COG | 7.2pF       | ±0.5pF                | CLR1C7R2D01INN# |
| 157 | 0.138               | 16                  | COG | 7.3pF       | ±0.1pF                | CLR1C7R3B01INN# |
| 158 | 0.138               | 16                  | COG | 7.3pF       | ±0.25pF               | CLR1C7R3C01INN# |
| 159 | 0.138               | 16                  | COG | 7.3pF       | ±0.5pF                | CLR1C7R3D01INN# |
| 160 | 0.138               | 16                  | COG | 7.4pF       | ±0.1pF                | CLR1C7R4B01INN# |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 008004/0201

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 161 | 0.138               | 16                  | COG | 7.4pF       | ±0.25pF               | CLR1C7R4C01INN# |
| 162 | 0.138               | 16                  | COG | 7.4pF       | ±0.5pF                | CLR1C7R4D01INN# |
| 163 | 0.138               | 16                  | COG | 7.5pF       | ±0.1pF                | CLR1C7R5B01INN# |
| 164 | 0.138               | 16                  | COG | 7.5pF       | ±0.25pF               | CLR1C7R5C01INN# |
| 165 | 0.138               | 16                  | COG | 7.5pF       | ±0.5pF                | CLR1C7R5D01INN# |
| 166 | 0.138               | 16                  | COG | 7.6pF       | ±0.1pF                | CLR1C7R6B01INN# |
| 167 | 0.138               | 16                  | COG | 7.6pF       | ±0.25pF               | CLR1C7R6C01INN# |
| 168 | 0.138               | 16                  | COG | 7.6pF       | ±0.5pF                | CLR1C7R6D01INN# |
| 169 | 0.138               | 16                  | COG | 7.7pF       | ±0.1pF                | CLR1C7R7B01INN# |
| 170 | 0.138               | 16                  | COG | 7.7pF       | ±0.25pF               | CLR1C7R7C01INN# |
| 171 | 0.138               | 16                  | COG | 7.7pF       | ±0.5pF                | CLR1C7R7D01INN# |
| 172 | 0.138               | 16                  | COG | 7.8pF       | ±0.1pF                | CLR1C7R8B01INN# |
| 173 | 0.138               | 16                  | COG | 7.8pF       | ±0.25pF               | CLR1C7R8C01INN# |
| 174 | 0.138               | 16                  | COG | 7.8pF       | ±0.5pF                | CLR1C7R8D01INN# |
| 175 | 0.138               | 16                  | COG | 7.9pF       | ±0.1pF                | CLR1C7R9B01INN# |
| 176 | 0.138               | 16                  | COG | 7.9pF       | ±0.25pF               | CLR1C7R9C01INN# |
| 177 | 0.138               | 16                  | COG | 7.9pF       | ±0.5pF                | CLR1C7R9D01INN# |
| 178 | 0.138               | 16                  | COG | 8pF         | ±0.1pF                | CLR1C080B01INN# |
| 179 | 0.138               | 16                  | COG | 8pF         | ±0.25pF               | CLR1C080C01INN# |
| 180 | 0.138               | 16                  | COG | 8pF         | ±0.5pF                | CLR1C080D01INN# |
| 181 | 0.138               | 16                  | COG | 8.1pF       | ±0.1pF                | CLR1C8R1B01INN# |
| 182 | 0.138               | 16                  | COG | 8.1pF       | ±0.25pF               | CLR1C8R1C01INN# |
| 183 | 0.138               | 16                  | COG | 8.1pF       | ±0.5pF                | CLR1C8R1D01INN# |
| 184 | 0.138               | 16                  | COG | 8.2pF       | ±0.1pF                | CLR1C8R2B01INN# |
| 185 | 0.138               | 16                  | COG | 8.2pF       | ±0.25pF               | CLR1C8R2C01INN# |
| 186 | 0.138               | 16                  | COG | 8.2pF       | ±0.5pF                | CLR1C8R2D01INN# |
| 187 | 0.138               | 16                  | COG | 8.3pF       | ±0.1pF                | CLR1C8R3B01INN# |
| 188 | 0.138               | 16                  | COG | 8.3pF       | ±0.25pF               | CLR1C8R3C01INN# |
| 189 | 0.138               | 16                  | COG | 8.3pF       | ±0.5pF                | CLR1C8R3D01INN# |
| 190 | 0.138               | 16                  | COG | 8.4pF       | ±0.1pF                | CLR1C8R4B01INN# |
| 191 | 0.138               | 16                  | COG | 8.4pF       | ±0.25pF               | CLR1C8R4C01INN# |
| 192 | 0.138               | 16                  | COG | 8.4pF       | ±0.5pF                | CLR1C8R4D01INN# |
| 193 | 0.138               | 16                  | COG | 8.5pF       | ±0.1pF                | CLR1C8R5B01INN# |
| 194 | 0.138               | 16                  | COG | 8.5pF       | ±0.25pF               | CLR1C8R5C01INN# |
| 195 | 0.138               | 16                  | COG | 8.5pF       | ±0.5pF                | CLR1C8R5D01INN# |
| 196 | 0.138               | 16                  | COG | 8.6pF       | ±0.1pF                | CLR1C8R6B01INN# |
| 197 | 0.138               | 16                  | COG | 8.6pF       | ±0.25pF               | CLR1C8R6C01INN# |
| 198 | 0.138               | 16                  | COG | 8.6pF       | ±0.5pF                | CLR1C8R6D01INN# |
| 199 | 0.138               | 16                  | COG | 8.7pF       | ±0.1pF                | CLR1C8R7B01INN# |
| 200 | 0.138               | 16                  | COG | 8.7pF       | ±0.25pF               | CLR1C8R7C01INN# |
| 201 | 0.138               | 16                  | COG | 8.7pF       | ±0.5pF                | CLR1C8R7D01INN# |
| 202 | 0.138               | 16                  | COG | 8.8pF       | ±0.1pF                | CLR1C8R8B01INN# |
| 203 | 0.138               | 16                  | COG | 8.8pF       | ±0.25pF               | CLR1C8R8C01INN# |
| 204 | 0.138               | 16                  | COG | 8.8pF       | ±0.5pF                | CLR1C8R8D01INN# |
| 205 | 0.138               | 16                  | COG | 8.9pF       | ±0.1pF                | CLR1C8R9B01INN# |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 008004/0201

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 206 | 0.138               | 16                  | COG | 8.9pF       | ±0.25pF               | CLR1C8R9C01INN# |
| 207 | 0.138               | 16                  | COG | 8.9pF       | ±0.5pF                | CLR1C8R9D01INN# |
| 208 | 0.138               | 16                  | COG | 9pF         | ±0.1pF                | CLR1C090B01INN# |
| 209 | 0.138               | 16                  | COG | 9pF         | ±0.25pF               | CLR1C090C01INN# |
| 210 | 0.138               | 16                  | COG | 9pF         | ±0.5pF                | CLR1C090D01INN# |
| 211 | 0.138               | 16                  | COG | 9.1pF       | ±0.1pF                | CLR1C9R1B01INN# |
| 212 | 0.138               | 16                  | COG | 9.1pF       | ±0.25pF               | CLR1C9R1C01INN# |
| 213 | 0.138               | 16                  | COG | 9.1pF       | ±0.5pF                | CLR1C9R1D01INN# |
| 214 | 0.138               | 16                  | COG | 9.2pF       | ±0.1pF                | CLR1C9R2B01INN# |
| 215 | 0.138               | 16                  | COG | 9.2pF       | ±0.25pF               | CLR1C9R2C01INN# |
| 216 | 0.138               | 16                  | COG | 9.2pF       | ±0.5pF                | CLR1C9R2D01INN# |
| 217 | 0.138               | 16                  | COG | 9.3pF       | ±0.1pF                | CLR1C9R3B01INN# |
| 218 | 0.138               | 16                  | COG | 9.3pF       | ±0.25pF               | CLR1C9R3C01INN# |
| 219 | 0.138               | 16                  | COG | 9.3pF       | ±0.5pF                | CLR1C9R3D01INN# |
| 220 | 0.138               | 16                  | COG | 9.4pF       | ±0.1pF                | CLR1C9R4B01INN# |
| 221 | 0.138               | 16                  | COG | 9.4pF       | ±0.25pF               | CLR1C9R4C01INN# |
| 222 | 0.138               | 16                  | COG | 9.4pF       | ±0.5pF                | CLR1C9R4D01INN# |
| 223 | 0.138               | 16                  | COG | 9.5pF       | ±0.1pF                | CLR1C9R5B01INN# |
| 224 | 0.138               | 16                  | COG | 9.5pF       | ±0.25pF               | CLR1C9R5C01INN# |
| 225 | 0.138               | 16                  | COG | 9.5pF       | ±0.5pF                | CLR1C9R5D01INN# |
| 226 | 0.138               | 16                  | COG | 9.6pF       | ±0.1pF                | CLR1C9R6B01INN# |
| 227 | 0.138               | 16                  | COG | 9.6pF       | ±0.25pF               | CLR1C9R6C01INN# |
| 228 | 0.138               | 16                  | COG | 9.6pF       | ±0.5pF                | CLR1C9R6D01INN# |
| 229 | 0.138               | 16                  | COG | 9.7pF       | ±0.1pF                | CLR1C9R7B01INN# |
| 230 | 0.138               | 16                  | COG | 9.7pF       | ±0.25pF               | CLR1C9R7C01INN# |
| 231 | 0.138               | 16                  | COG | 9.7pF       | ±0.5pF                | CLR1C9R7D01INN# |
| 232 | 0.138               | 16                  | COG | 9.8pF       | ±0.1pF                | CLR1C9R8B01INN# |
| 233 | 0.138               | 16                  | COG | 9.8pF       | ±0.25pF               | CLR1C9R8C01INN# |
| 234 | 0.138               | 16                  | COG | 9.8pF       | ±0.5pF                | CLR1C9R8D01INN# |
| 235 | 0.138               | 16                  | COG | 9.9pF       | ±0.1pF                | CLR1C9R9B01INN# |
| 236 | 0.138               | 16                  | COG | 9.9pF       | ±0.25pF               | CLR1C9R9C01INN# |
| 237 | 0.138               | 16                  | COG | 9.9pF       | ±0.5pF                | CLR1C9R9D01INN# |
| 238 | 0.138               | 16                  | COG | 10pF        | ±0.05pF               | CLR1C100A01INN# |
| 239 | 0.138               | 16                  | COG | 10pF        | ±0.1pF                | CLR1C100B01INN# |
| 240 | 0.138               | 16                  | COG | 10pF        | ±0.25pF               | CLR1C100C01INN# |
| 241 | 0.138               | 16                  | COG | 10pF        | ±0.5pF                | CLR1C100D01INN# |
| 242 | 0.138               | 16                  | COG | 10pF        | ±5%                   | CLR1C100J01INN# |
| 243 | 0.138               | 16                  | COG | 12pF        | ±5%                   | CLR1C120J01INN# |
| 244 | 0.138               | 16                  | COG | 15pF        | ±5%                   | CLR1C150J01INN# |
| 245 | 0.138               | 16                  | COG | 18pF        | ±5%                   | CLR1C180J01INN# |
| 246 | 0.138               | 16                  | COG | 22pF        | ±5%                   | CLR1C220J01INN# |
| 247 | 0.138               | 16                  | COG | 27pF        | ±5%                   | CLR1C270J01INN# |
| 248 | 0.138               | 16                  | COG | 33pF        | ±5%                   | CLR1C330J01INN# |
| 249 | 0.138               | 16                  | COG | 36pF        | ±5%                   | CLR1C360J01INN# |
| 250 | 0.138               | 16                  | COG | 39pF        | ±5%                   | CLR1C390J01INN# |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 008004/0201

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 251 | 0.138               | 16                  | COG | 47pF        | ±5%                   | CLR1C470J01NNN# |
| 252 | 0.138               | 16                  | COG | 56pF        | ±5%                   | CLR1C560J01NNN# |
| 253 | 0.138               | 25                  | COG | 0.2pF       | ±0.05pF               | CLR1C0R2AA1INN# |
| 254 | 0.138               | 25                  | COG | 0.2pF       | ±0.1pF                | CLR1C0R2BA1INN# |
| 255 | 0.138               | 25                  | COG | 0.2pF       | ±0.1pF                | CLR1C0R2BA1NNN# |
| 256 | 0.138               | 25                  | COG | 0.3pF       | ±0.05pF               | CLR1C0R3AA1INN# |
| 257 | 0.138               | 25                  | COG | 0.3pF       | ±0.1pF                | CLR1C0R3BA1INN# |
| 258 | 0.138               | 25                  | COG | 0.3pF       | ±0.1pF                | CLR1C0R3BA1NNN# |
| 259 | 0.138               | 25                  | COG | 0.4pF       | ±0.05pF               | CLR1C0R4AA1INN# |
| 260 | 0.138               | 25                  | COG | 0.4pF       | ±0.1pF                | CLR1C0R4BA1INN# |
| 261 | 0.138               | 25                  | COG | 0.4pF       | ±0.1pF                | CLR1C0R4BA1NNN# |
| 262 | 0.138               | 25                  | COG | 0.5pF       | ±0.05pF               | CLR1C0R5AA1INN# |
| 263 | 0.138               | 25                  | COG | 0.5pF       | ±0.1pF                | CLR1C0R5BA1INN# |
| 264 | 0.138               | 25                  | COG | 0.5pF       | ±0.1pF                | CLR1C0R5BA1NNN# |
| 265 | 0.138               | 25                  | COG | 0.6pF       | ±0.05pF               | CLR1C0R6AA1INN# |
| 266 | 0.138               | 25                  | COG | 0.6pF       | ±0.1pF                | CLR1C0R6BA1INN# |
| 267 | 0.138               | 25                  | COG | 0.6pF       | ±0.1pF                | CLR1C0R6BA1NNN# |
| 268 | 0.138               | 25                  | COG | 0.7pF       | ±0.05pF               | CLR1C0R7AA1INN# |
| 269 | 0.138               | 25                  | COG | 0.7pF       | ±0.1pF                | CLR1C0R7BA1INN# |
| 270 | 0.138               | 25                  | COG | 0.7pF       | ±0.1pF                | CLR1C0R7BA1NNN# |
| 271 | 0.138               | 25                  | COG | 0.8pF       | ±0.05pF               | CLR1C0R8AA1INN# |
| 272 | 0.138               | 25                  | COG | 0.8pF       | ±0.1pF                | CLR1C0R8BA1INN# |
| 273 | 0.138               | 25                  | COG | 0.8pF       | ±0.1pF                | CLR1C0R8BA1NNN# |
| 274 | 0.138               | 25                  | COG | 0.9pF       | ±0.05pF               | CLR1C0R9AA1INN# |
| 275 | 0.138               | 25                  | COG | 0.9pF       | ±0.1pF                | CLR1C0R9BA1INN# |
| 276 | 0.138               | 25                  | COG | 1pF         | ±0.05pF               | CLR1C010AA1INN# |
| 277 | 0.138               | 25                  | COG | 1pF         | ±0.1pF                | CLR1C010BA1INN# |
| 278 | 0.138               | 25                  | COG | 1pF         | ±0.25pF               | CLR1C010CA1INN# |
| 279 | 0.138               | 25                  | COG | 1.1pF       | ±0.05pF               | CLR1C1R1AA1INN# |
| 280 | 0.138               | 25                  | COG | 1.1pF       | ±0.1pF                | CLR1C1R1BA1INN# |
| 281 | 0.138               | 25                  | COG | 1.1pF       | ±0.25pF               | CLR1C1R1CA1INN# |
| 282 | 0.138               | 25                  | COG | 1.2pF       | ±0.05pF               | CLR1C1R2AA1INN# |
| 283 | 0.138               | 25                  | COG | 1.2pF       | ±0.1pF                | CLR1C1R2BA1INN# |
| 284 | 0.138               | 25                  | COG | 1.2pF       | ±0.25pF               | CLR1C1R2CA1INN# |
| 285 | 0.138               | 25                  | COG | 1.3pF       | ±0.05pF               | CLR1C1R3AA1INN# |
| 286 | 0.138               | 25                  | COG | 1.3pF       | ±0.1pF                | CLR1C1R3BA1INN# |
| 287 | 0.138               | 25                  | COG | 1.3pF       | ±0.25pF               | CLR1C1R3CA1INN# |
| 288 | 0.138               | 25                  | COG | 1.4pF       | ±0.05pF               | CLR1C1R4AA1INN# |
| 289 | 0.138               | 25                  | COG | 1.4pF       | ±0.1pF                | CLR1C1R4BA1INN# |
| 290 | 0.138               | 25                  | COG | 1.4pF       | ±0.25pF               | CLR1C1R4CA1INN# |
| 291 | 0.138               | 25                  | COG | 1.5pF       | ±0.05pF               | CLR1C1R5AA1INN# |
| 292 | 0.138               | 25                  | COG | 1.5pF       | ±0.1pF                | CLR1C1R5BA1INN# |
| 293 | 0.138               | 25                  | COG | 1.5pF       | ±0.25pF               | CLR1C1R5CA1INN# |
| 294 | 0.138               | 25                  | COG | 1.6pF       | ±0.05pF               | CLR1C1R6AA1INN# |
| 295 | 0.138               | 25                  | COG | 1.6pF       | ±0.1pF                | CLR1C1R6BA1INN# |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 008004/0201

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 296 | 0.138               | 25                  | COG | 1.6pF       | ±0.25pF               | CLR1C1R6CA1INN# |
| 297 | 0.138               | 25                  | COG | 1.7pF       | ±0.05pF               | CLR1C1R7AA1INN# |
| 298 | 0.138               | 25                  | COG | 1.7pF       | ±0.1pF                | CLR1C1R7BA1INN# |
| 299 | 0.138               | 25                  | COG | 1.7pF       | ±0.25pF               | CLR1C1R7CA1INN# |
| 300 | 0.138               | 25                  | COG | 1.8pF       | ±0.05pF               | CLR1C1R8AA1INN# |
| 301 | 0.138               | 25                  | COG | 1.8pF       | ±0.1pF                | CLR1C1R8BA1INN# |
| 302 | 0.138               | 25                  | COG | 1.8pF       | ±0.25pF               | CLR1C1R8CA1INN# |
| 303 | 0.138               | 25                  | COG | 1.9pF       | ±0.05pF               | CLR1C1R9AA1INN# |
| 304 | 0.138               | 25                  | COG | 1.9pF       | ±0.1pF                | CLR1C1R9BA1INN# |
| 305 | 0.138               | 25                  | COG | 1.9pF       | ±0.25pF               | CLR1C1R9CA1INN# |
| 306 | 0.138               | 25                  | COG | 2pF         | ±0.05pF               | CLR1C020AA1INN# |
| 307 | 0.138               | 25                  | COG | 2pF         | ±0.1pF                | CLR1C020BA1INN# |
| 308 | 0.138               | 25                  | COG | 2pF         | ±0.25pF               | CLR1C020CA1INN# |
| 309 | 0.138               | 25                  | COG | 2.1pF       | ±0.05pF               | CLR1C2R1AA1INN# |
| 310 | 0.138               | 25                  | COG | 2.1pF       | ±0.1pF                | CLR1C2R1BA1INN# |
| 311 | 0.138               | 25                  | COG | 2.1pF       | ±0.25pF               | CLR1C2R1CA1INN# |
| 312 | 0.138               | 25                  | COG | 2.2pF       | ±0.05pF               | CLR1C2R2AA1INN# |
| 313 | 0.138               | 25                  | COG | 2.2pF       | ±0.1pF                | CLR1C2R2BA1INN# |
| 314 | 0.138               | 25                  | COG | 2.2pF       | ±0.25pF               | CLR1C2R2CA1INN# |
| 315 | 0.138               | 25                  | COG | 2.3pF       | ±0.05pF               | CLR1C2R3AA1INN# |
| 316 | 0.138               | 25                  | COG | 2.3pF       | ±0.1pF                | CLR1C2R3BA1INN# |
| 317 | 0.138               | 25                  | COG | 2.3pF       | ±0.25pF               | CLR1C2R3CA1INN# |
| 318 | 0.138               | 25                  | COG | 2.4pF       | ±0.05pF               | CLR1C2R4AA1INN# |
| 319 | 0.138               | 25                  | COG | 2.4pF       | ±0.1pF                | CLR1C2R4BA1INN# |
| 320 | 0.138               | 25                  | COG | 2.4pF       | ±0.25pF               | CLR1C2R4CA1INN# |
| 321 | 0.138               | 25                  | COG | 2.5pF       | ±0.05pF               | CLR1C2R5AA1INN# |
| 322 | 0.138               | 25                  | COG | 2.5pF       | ±0.1pF                | CLR1C2R5BA1INN# |
| 323 | 0.138               | 25                  | COG | 2.5pF       | ±0.25pF               | CLR1C2R5CA1INN# |
| 324 | 0.138               | 25                  | COG | 2.6pF       | ±0.05pF               | CLR1C2R6AA1INN# |
| 325 | 0.138               | 25                  | COG | 2.6pF       | ±0.1pF                | CLR1C2R6BA1INN# |
| 326 | 0.138               | 25                  | COG | 2.6pF       | ±0.25pF               | CLR1C2R6CA1INN# |
| 327 | 0.138               | 25                  | COG | 2.7pF       | ±0.05pF               | CLR1C2R7AA1INN# |
| 328 | 0.138               | 25                  | COG | 2.7pF       | ±0.1pF                | CLR1C2R7BA1INN# |
| 329 | 0.138               | 25                  | COG | 2.7pF       | ±0.25pF               | CLR1C2R7CA1INN# |
| 330 | 0.138               | 25                  | COG | 2.8pF       | ±0.05pF               | CLR1C2R8AA1INN# |
| 331 | 0.138               | 25                  | COG | 2.8pF       | ±0.1pF                | CLR1C2R8BA1INN# |
| 332 | 0.138               | 25                  | COG | 2.8pF       | ±0.25pF               | CLR1C2R8CA1INN# |
| 333 | 0.138               | 25                  | COG | 2.9pF       | ±0.05pF               | CLR1C2R9AA1INN# |
| 334 | 0.138               | 25                  | COG | 2.9pF       | ±0.1pF                | CLR1C2R9BA1INN# |
| 335 | 0.138               | 25                  | COG | 2.9pF       | ±0.25pF               | CLR1C2R9CA1INN# |
| 336 | 0.138               | 25                  | COG | 3pF         | ±0.05pF               | CLR1C030AA1INN# |
| 337 | 0.138               | 25                  | COG | 3pF         | ±0.1pF                | CLR1C030BA1INN# |
| 338 | 0.138               | 25                  | COG | 3pF         | ±0.25pF               | CLR1C030CA1INN# |
| 339 | 0.138               | 25                  | COG | 3.1pF       | ±0.05pF               | CLR1C3R1AA1INN# |
| 340 | 0.138               | 25                  | COG | 3.1pF       | ±0.1pF                | CLR1C3R1BA1INN# |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 008004/0201

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 341 | 0.138               | 25                  | COG | 3.1pF       | ±0.25pF               | CLR1C3R1CA1INN# |
| 342 | 0.138               | 25                  | COG | 3.2pF       | ±0.05pF               | CLR1C3R2AA1INN# |
| 343 | 0.138               | 25                  | COG | 3.2pF       | ±0.1pF                | CLR1C3R2BA1INN# |
| 344 | 0.138               | 25                  | COG | 3.2pF       | ±0.25pF               | CLR1C3R2CA1INN# |
| 345 | 0.138               | 25                  | COG | 3.3pF       | ±0.05pF               | CLR1C3R3AA1INN# |
| 346 | 0.138               | 25                  | COG | 3.3pF       | ±0.1pF                | CLR1C3R3BA1INN# |
| 347 | 0.138               | 25                  | COG | 3.3pF       | ±0.25pF               | CLR1C3R3CA1INN# |
| 348 | 0.138               | 25                  | COG | 3.4pF       | ±0.05pF               | CLR1C3R4AA1INN# |
| 349 | 0.138               | 25                  | COG | 3.4pF       | ±0.1pF                | CLR1C3R4BA1INN# |
| 350 | 0.138               | 25                  | COG | 3.4pF       | ±0.25pF               | CLR1C3R4CA1INN# |
| 351 | 0.138               | 25                  | COG | 3.5pF       | ±0.05pF               | CLR1C3R5AA1INN# |
| 352 | 0.138               | 25                  | COG | 3.5pF       | ±0.1pF                | CLR1C3R5BA1INN# |
| 353 | 0.138               | 25                  | COG | 3.5pF       | ±0.25pF               | CLR1C3R5CA1INN# |
| 354 | 0.138               | 25                  | COG | 3.6pF       | ±0.05pF               | CLR1C3R6AA1INN# |
| 355 | 0.138               | 25                  | COG | 3.6pF       | ±0.1pF                | CLR1C3R6BA1INN# |
| 356 | 0.138               | 25                  | COG | 3.6pF       | ±0.25pF               | CLR1C3R6CA1INN# |
| 357 | 0.138               | 25                  | COG | 3.7pF       | ±0.05pF               | CLR1C3R7AA1INN# |
| 358 | 0.138               | 25                  | COG | 3.7pF       | ±0.1pF                | CLR1C3R7BA1INN# |
| 359 | 0.138               | 25                  | COG | 3.7pF       | ±0.25pF               | CLR1C3R7CA1INN# |
| 360 | 0.138               | 25                  | COG | 3.8pF       | ±0.05pF               | CLR1C3R8AA1INN# |
| 361 | 0.138               | 25                  | COG | 3.8pF       | ±0.1pF                | CLR1C3R8BA1INN# |
| 362 | 0.138               | 25                  | COG | 3.8pF       | ±0.25pF               | CLR1C3R8CA1INN# |
| 363 | 0.138               | 25                  | COG | 3.9pF       | ±0.05pF               | CLR1C3R9AA1INN# |
| 364 | 0.138               | 25                  | COG | 3.9pF       | ±0.1pF                | CLR1C3R9BA1INN# |
| 365 | 0.138               | 25                  | COG | 3.9pF       | ±0.25pF               | CLR1C3R9CA1INN# |
| 366 | 0.138               | 25                  | COG | 4pF         | ±0.05pF               | CLR1C040AA1INN# |
| 367 | 0.138               | 25                  | COG | 4pF         | ±0.1pF                | CLR1C040BA1INN# |
| 368 | 0.138               | 25                  | COG | 4pF         | ±0.25pF               | CLR1C040CA1INN# |
| 369 | 0.138               | 25                  | COG | 4.1pF       | ±0.05pF               | CLR1C4R1AA1INN# |
| 370 | 0.138               | 25                  | COG | 4.1pF       | ±0.1pF                | CLR1C4R1BA1INN# |
| 371 | 0.138               | 25                  | COG | 4.1pF       | ±0.25pF               | CLR1C4R1CA1INN# |
| 372 | 0.138               | 25                  | COG | 4.2pF       | ±0.05pF               | CLR1C4R2AA1INN# |
| 373 | 0.138               | 25                  | COG | 4.2pF       | ±0.1pF                | CLR1C4R2BA1INN# |
| 374 | 0.138               | 25                  | COG | 4.2pF       | ±0.25pF               | CLR1C4R2CA1INN# |
| 375 | 0.138               | 25                  | COG | 4.3pF       | ±0.05pF               | CLR1C4R3AA1INN# |
| 376 | 0.138               | 25                  | COG | 4.3pF       | ±0.1pF                | CLR1C4R3BA1INN# |
| 377 | 0.138               | 25                  | COG | 4.3pF       | ±0.25pF               | CLR1C4R3CA1INN# |
| 378 | 0.138               | 25                  | COG | 4.4pF       | ±0.05pF               | CLR1C4R4AA1INN# |
| 379 | 0.138               | 25                  | COG | 4.4pF       | ±0.1pF                | CLR1C4R4BA1INN# |
| 380 | 0.138               | 25                  | COG | 4.4pF       | ±0.25pF               | CLR1C4R4CA1INN# |
| 381 | 0.138               | 25                  | COG | 4.5pF       | ±0.05pF               | CLR1C4R5AA1INN# |
| 382 | 0.138               | 25                  | COG | 4.5pF       | ±0.1pF                | CLR1C4R5BA1INN# |
| 383 | 0.138               | 25                  | COG | 4.5pF       | ±0.25pF               | CLR1C4R5CA1INN# |
| 384 | 0.138               | 25                  | COG | 4.6pF       | ±0.05pF               | CLR1C4R6AA1INN# |
| 385 | 0.138               | 25                  | COG | 4.6pF       | ±0.1pF                | CLR1C4R6BA1INN# |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 008004/0201

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 386 | 0.138               | 25                  | COG | 4.6pF       | ±0.25pF               | CLR1C4R6CA1INN# |
| 387 | 0.138               | 25                  | COG | 4.7pF       | ±0.05pF               | CLR1C4R7AA1INN# |
| 388 | 0.138               | 25                  | COG | 4.7pF       | ±0.1pF                | CLR1C4R7BA1INN# |
| 389 | 0.138               | 25                  | COG | 4.7pF       | ±0.25pF               | CLR1C4R7CA1INN# |
| 390 | 0.138               | 25                  | COG | 4.8pF       | ±0.05pF               | CLR1C4R8AA1INN# |
| 391 | 0.138               | 25                  | COG | 4.8pF       | ±0.1pF                | CLR1C4R8BA1INN# |
| 392 | 0.138               | 25                  | COG | 4.8pF       | ±0.25pF               | CLR1C4R8CA1INN# |
| 393 | 0.138               | 25                  | COG | 4.9pF       | ±0.05pF               | CLR1C4R9AA1INN# |
| 394 | 0.138               | 25                  | COG | 4.9pF       | ±0.1pF                | CLR1C4R9BA1INN# |
| 395 | 0.138               | 25                  | COG | 4.9pF       | ±0.25pF               | CLR1C4R9CA1INN# |
| 396 | 0.138               | 25                  | COG | 5pF         | ±0.05pF               | CLR1C050AA1INN# |
| 397 | 0.138               | 25                  | COG | 5pF         | ±0.1pF                | CLR1C050BA1INN# |
| 398 | 0.138               | 25                  | COG | 5pF         | ±0.1pF                | CLR1C050BA1NNN# |
| 399 | 0.138               | 25                  | COG | 5pF         | ±0.25pF               | CLR1C050CA1INN# |
| 400 | 0.138               | 25                  | COG | 5.1pF       | ±0.05pF               | CLR1C5R1AA1INN# |
| 401 | 0.138               | 25                  | COG | 5.1pF       | ±0.1pF                | CLR1C5R1BA1INN# |
| 402 | 0.138               | 25                  | COG | 5.1pF       | ±0.25pF               | CLR1C5R1CA1INN# |
| 403 | 0.138               | 25                  | COG | 5.1pF       | ±0.5pF                | CLR1C5R1DA1INN# |
| 404 | 0.138               | 25                  | COG | 5.2pF       | ±0.05pF               | CLR1C5R2AA1INN# |
| 405 | 0.138               | 25                  | COG | 5.2pF       | ±0.1pF                | CLR1C5R2BA1INN# |
| 406 | 0.138               | 25                  | COG | 5.2pF       | ±0.25pF               | CLR1C5R2CA1INN# |
| 407 | 0.138               | 25                  | COG | 5.2pF       | ±0.5pF                | CLR1C5R2DA1INN# |
| 408 | 0.138               | 25                  | COG | 5.3pF       | ±0.05pF               | CLR1C5R3AA1INN# |
| 409 | 0.138               | 25                  | COG | 5.3pF       | ±0.1pF                | CLR1C5R3BA1INN# |
| 410 | 0.138               | 25                  | COG | 5.3pF       | ±0.25pF               | CLR1C5R3CA1INN# |
| 411 | 0.138               | 25                  | COG | 5.3pF       | ±0.5pF                | CLR1C5R3DA1INN# |
| 412 | 0.138               | 25                  | COG | 5.4pF       | ±0.05pF               | CLR1C5R4AA1INN# |
| 413 | 0.138               | 25                  | COG | 5.4pF       | ±0.1pF                | CLR1C5R4BA1INN# |
| 414 | 0.138               | 25                  | COG | 5.4pF       | ±0.25pF               | CLR1C5R4CA1INN# |
| 415 | 0.138               | 25                  | COG | 5.4pF       | ±0.5pF                | CLR1C5R4DA1INN# |
| 416 | 0.138               | 25                  | COG | 5.5pF       | ±0.05pF               | CLR1C5R5AA1INN# |
| 417 | 0.138               | 25                  | COG | 5.5pF       | ±0.1pF                | CLR1C5R5BA1INN# |
| 418 | 0.138               | 25                  | COG | 5.5pF       | ±0.25pF               | CLR1C5R5CA1INN# |
| 419 | 0.138               | 25                  | COG | 5.5pF       | ±0.5pF                | CLR1C5R5DA1INN# |
| 420 | 0.138               | 25                  | COG | 5.6pF       | ±0.05pF               | CLR1C5R6AA1INN# |
| 421 | 0.138               | 25                  | COG | 5.6pF       | ±0.1pF                | CLR1C5R6BA1INN# |
| 422 | 0.138               | 25                  | COG | 5.6pF       | ±0.25pF               | CLR1C5R6CA1INN# |
| 423 | 0.138               | 25                  | COG | 5.6pF       | ±0.5pF                | CLR1C5R6DA1INN# |
| 424 | 0.138               | 25                  | COG | 5.7pF       | ±0.05pF               | CLR1C5R7AA1INN# |
| 425 | 0.138               | 25                  | COG | 5.7pF       | ±0.1pF                | CLR1C5R7BA1INN# |
| 426 | 0.138               | 25                  | COG | 5.7pF       | ±0.25pF               | CLR1C5R7CA1INN# |
| 427 | 0.138               | 25                  | COG | 5.7pF       | ±0.5pF                | CLR1C5R7DA1INN# |
| 428 | 0.138               | 25                  | COG | 5.8pF       | ±0.05pF               | CLR1C5R8AA1INN# |
| 429 | 0.138               | 25                  | COG | 5.8pF       | ±0.1pF                | CLR1C5R8BA1INN# |
| 430 | 0.138               | 25                  | COG | 5.8pF       | ±0.25pF               | CLR1C5R8CA1INN# |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 008004/0201

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 431 | 0.138               | 25                  | COG | 5.8pF       | ±0.5pF                | CLR1C5R8DA1INN# |
| 432 | 0.138               | 25                  | COG | 5.9pF       | ±0.05pF               | CLR1C5R9AA1INN# |
| 433 | 0.138               | 25                  | COG | 5.9pF       | ±0.1pF                | CLR1C5R9BA1INN# |
| 434 | 0.138               | 25                  | COG | 5.9pF       | ±0.25pF               | CLR1C5R9CA1INN# |
| 435 | 0.138               | 25                  | COG | 5.9pF       | ±0.5pF                | CLR1C5R9DA1INN# |
| 436 | 0.138               | 25                  | COG | 6pF         | ±0.05pF               | CLR1C060AA1INN# |
| 437 | 0.138               | 25                  | COG | 6pF         | ±0.1pF                | CLR1C060BA1INN# |
| 438 | 0.138               | 25                  | COG | 6pF         | ±0.25pF               | CLR1C060CA1INN# |
| 439 | 0.138               | 25                  | COG | 6pF         | ±0.5pF                | CLR1C060DA1INN# |
| 440 | 0.138               | 25                  | COG | 6.1pF       | ±0.05pF               | CLR1C6R1AA1INN# |
| 441 | 0.138               | 25                  | COG | 6.1pF       | ±0.1pF                | CLR1C6R1BA1INN# |
| 442 | 0.138               | 25                  | COG | 6.1pF       | ±0.25pF               | CLR1C6R1CA1INN# |
| 443 | 0.138               | 25                  | COG | 6.1pF       | ±0.5pF                | CLR1C6R1DA1INN# |
| 444 | 0.138               | 25                  | COG | 6.2pF       | ±0.05pF               | CLR1C6R2AA1INN# |
| 445 | 0.138               | 25                  | COG | 6.2pF       | ±0.1pF                | CLR1C6R2BA1INN# |
| 446 | 0.138               | 25                  | COG | 6.2pF       | ±0.25pF               | CLR1C6R2CA1INN# |
| 447 | 0.138               | 25                  | COG | 6.2pF       | ±0.5pF                | CLR1C6R2DA1INN# |
| 448 | 0.138               | 25                  | COG | 6.3pF       | ±0.05pF               | CLR1C6R3AA1INN# |
| 449 | 0.138               | 25                  | COG | 6.3pF       | ±0.1pF                | CLR1C6R3BA1INN# |
| 450 | 0.138               | 25                  | COG | 6.3pF       | ±0.25pF               | CLR1C6R3CA1INN# |
| 451 | 0.138               | 25                  | COG | 6.3pF       | ±0.5pF                | CLR1C6R3DA1INN# |
| 452 | 0.138               | 25                  | COG | 6.4pF       | ±0.05pF               | CLR1C6R4AA1INN# |
| 453 | 0.138               | 25                  | COG | 6.4pF       | ±0.1pF                | CLR1C6R4BA1INN# |
| 454 | 0.138               | 25                  | COG | 6.4pF       | ±0.25pF               | CLR1C6R4CA1INN# |
| 455 | 0.138               | 25                  | COG | 6.4pF       | ±0.5pF                | CLR1C6R4DA1INN# |
| 456 | 0.138               | 25                  | COG | 6.5pF       | ±0.05pF               | CLR1C6R5AA1INN# |
| 457 | 0.138               | 25                  | COG | 6.5pF       | ±0.1pF                | CLR1C6R5BA1INN# |
| 458 | 0.138               | 25                  | COG | 6.5pF       | ±0.25pF               | CLR1C6R5CA1INN# |
| 459 | 0.138               | 25                  | COG | 6.5pF       | ±0.5pF                | CLR1C6R5DA1INN# |
| 460 | 0.138               | 25                  | COG | 6.6pF       | ±0.05pF               | CLR1C6R6AA1INN# |
| 461 | 0.138               | 25                  | COG | 6.6pF       | ±0.1pF                | CLR1C6R6BA1INN# |
| 462 | 0.138               | 25                  | COG | 6.6pF       | ±0.25pF               | CLR1C6R6CA1INN# |
| 463 | 0.138               | 25                  | COG | 6.6pF       | ±0.5pF                | CLR1C6R6DA1INN# |
| 464 | 0.138               | 25                  | COG | 6.7pF       | ±0.05pF               | CLR1C6R7AA1INN# |
| 465 | 0.138               | 25                  | COG | 6.7pF       | ±0.1pF                | CLR1C6R7BA1INN# |
| 466 | 0.138               | 25                  | COG | 6.7pF       | ±0.25pF               | CLR1C6R7CA1INN# |
| 467 | 0.138               | 25                  | COG | 6.7pF       | ±0.5pF                | CLR1C6R7DA1INN# |
| 468 | 0.138               | 25                  | COG | 6.8pF       | ±0.05pF               | CLR1C6R8AA1INN# |
| 469 | 0.138               | 25                  | COG | 6.8pF       | ±0.1pF                | CLR1C6R8BA1INN# |
| 470 | 0.138               | 25                  | COG | 6.8pF       | ±0.25pF               | CLR1C6R8CA1INN# |
| 471 | 0.138               | 25                  | COG | 6.8pF       | ±0.5pF                | CLR1C6R8DA1INN# |
| 472 | 0.138               | 25                  | COG | 6.9pF       | ±0.05pF               | CLR1C6R9AA1INN# |
| 473 | 0.138               | 25                  | COG | 6.9pF       | ±0.1pF                | CLR1C6R9BA1INN# |
| 474 | 0.138               | 25                  | COG | 6.9pF       | ±0.25pF               | CLR1C6R9CA1INN# |
| 475 | 0.138               | 25                  | COG | 6.9pF       | ±0.5pF                | CLR1C6R9DA1INN# |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 008004/0201

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 476 | 0.138               | 25                  | COG | 7pF         | ±0.05pF               | CLR1C070AA1INN# |
| 477 | 0.138               | 25                  | COG | 7pF         | ±0.1pF                | CLR1C070BA1INN# |
| 478 | 0.138               | 25                  | COG | 7pF         | ±0.25pF               | CLR1C070CA1INN# |
| 479 | 0.138               | 25                  | COG | 7pF         | ±0.5pF                | CLR1C070DA1INN# |
| 480 | 0.138               | 25                  | COG | 7.1pF       | ±0.05pF               | CLR1C7R1AA1INN# |
| 481 | 0.138               | 25                  | COG | 7.1pF       | ±0.1pF                | CLR1C7R1BA1INN# |
| 482 | 0.138               | 25                  | COG | 7.1pF       | ±0.25pF               | CLR1C7R1CA1INN# |
| 483 | 0.138               | 25                  | COG | 7.1pF       | ±0.5pF                | CLR1C7R1DA1INN# |
| 484 | 0.138               | 25                  | COG | 7.2pF       | ±0.05pF               | CLR1C7R2AA1INN# |
| 485 | 0.138               | 25                  | COG | 7.2pF       | ±0.1pF                | CLR1C7R2BA1INN# |
| 486 | 0.138               | 25                  | COG | 7.2pF       | ±0.25pF               | CLR1C7R2CA1INN# |
| 487 | 0.138               | 25                  | COG | 7.2pF       | ±0.5pF                | CLR1C7R2DA1INN# |
| 488 | 0.138               | 25                  | COG | 7.3pF       | ±0.05pF               | CLR1C7R3AA1INN# |
| 489 | 0.138               | 25                  | COG | 7.3pF       | ±0.1pF                | CLR1C7R3BA1INN# |
| 490 | 0.138               | 25                  | COG | 7.3pF       | ±0.25pF               | CLR1C7R3CA1INN# |
| 491 | 0.138               | 25                  | COG | 7.3pF       | ±0.5pF                | CLR1C7R3DA1INN# |
| 492 | 0.138               | 25                  | COG | 7.4pF       | ±0.05pF               | CLR1C7R4AA1INN# |
| 493 | 0.138               | 25                  | COG | 7.4pF       | ±0.1pF                | CLR1C7R4BA1INN# |
| 494 | 0.138               | 25                  | COG | 7.4pF       | ±0.25pF               | CLR1C7R4CA1INN# |
| 495 | 0.138               | 25                  | COG | 7.4pF       | ±0.5pF                | CLR1C7R4DA1INN# |
| 496 | 0.138               | 25                  | COG | 7.5pF       | ±0.05pF               | CLR1C7R5AA1INN# |
| 497 | 0.138               | 25                  | COG | 7.5pF       | ±0.1pF                | CLR1C7R5BA1INN# |
| 498 | 0.138               | 25                  | COG | 7.5pF       | ±0.25pF               | CLR1C7R5CA1INN# |
| 499 | 0.138               | 25                  | COG | 7.5pF       | ±0.5pF                | CLR1C7R5DA1INN# |
| 500 | 0.138               | 25                  | COG | 7.6pF       | ±0.05pF               | CLR1C7R6AA1INN# |
| 501 | 0.138               | 25                  | COG | 7.6pF       | ±0.1pF                | CLR1C7R6BA1INN# |
| 502 | 0.138               | 25                  | COG | 7.6pF       | ±0.25pF               | CLR1C7R6CA1INN# |
| 503 | 0.138               | 25                  | COG | 7.6pF       | ±0.5pF                | CLR1C7R6DA1INN# |
| 504 | 0.138               | 25                  | COG | 7.7pF       | ±0.05pF               | CLR1C7R7AA1INN# |
| 505 | 0.138               | 25                  | COG | 7.7pF       | ±0.1pF                | CLR1C7R7BA1INN# |
| 506 | 0.138               | 25                  | COG | 7.7pF       | ±0.25pF               | CLR1C7R7CA1INN# |
| 507 | 0.138               | 25                  | COG | 7.7pF       | ±0.5pF                | CLR1C7R7DA1INN# |
| 508 | 0.138               | 25                  | COG | 7.8pF       | ±0.05pF               | CLR1C7R8AA1INN# |
| 509 | 0.138               | 25                  | COG | 7.8pF       | ±0.1pF                | CLR1C7R8BA1INN# |
| 510 | 0.138               | 25                  | COG | 7.8pF       | ±0.25pF               | CLR1C7R8CA1INN# |
| 511 | 0.138               | 25                  | COG | 7.8pF       | ±0.5pF                | CLR1C7R8DA1INN# |
| 512 | 0.138               | 25                  | COG | 7.9pF       | ±0.05pF               | CLR1C7R9AA1INN# |
| 513 | 0.138               | 25                  | COG | 7.9pF       | ±0.1pF                | CLR1C7R9BA1INN# |
| 514 | 0.138               | 25                  | COG | 7.9pF       | ±0.25pF               | CLR1C7R9CA1INN# |
| 515 | 0.138               | 25                  | COG | 7.9pF       | ±0.5pF                | CLR1C7R9DA1INN# |
| 516 | 0.138               | 25                  | COG | 8pF         | ±0.05pF               | CLR1C080AA1INN# |
| 517 | 0.138               | 25                  | COG | 8pF         | ±0.1pF                | CLR1C080BA1INN# |
| 518 | 0.138               | 25                  | COG | 8pF         | ±0.25pF               | CLR1C080CA1INN# |
| 519 | 0.138               | 25                  | COG | 8pF         | ±0.5pF                | CLR1C080DA1INN# |
| 520 | 0.138               | 25                  | COG | 8.1pF       | ±0.05pF               | CLR1C8R1AA1INN# |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 008004/0201

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 521 | 0.138               | 25                  | COG | 8.1pF       | ±0.1pF                | CLR1C8R1BA1INN# |
| 522 | 0.138               | 25                  | COG | 8.1pF       | ±0.25pF               | CLR1C8R1CA1INN# |
| 523 | 0.138               | 25                  | COG | 8.1pF       | ±0.5pF                | CLR1C8R1DA1INN# |
| 524 | 0.138               | 25                  | COG | 8.2pF       | ±0.05pF               | CLR1C8R2AA1INN# |
| 525 | 0.138               | 25                  | COG | 8.2pF       | ±0.1pF                | CLR1C8R2BA1INN# |
| 526 | 0.138               | 25                  | COG | 8.2pF       | ±0.25pF               | CLR1C8R2CA1INN# |
| 527 | 0.138               | 25                  | COG | 8.2pF       | ±0.5pF                | CLR1C8R2DA1INN# |
| 528 | 0.138               | 25                  | COG | 8.3pF       | ±0.05pF               | CLR1C8R3AA1INN# |
| 529 | 0.138               | 25                  | COG | 8.3pF       | ±0.1pF                | CLR1C8R3BA1INN# |
| 530 | 0.138               | 25                  | COG | 8.3pF       | ±0.25pF               | CLR1C8R3CA1INN# |
| 531 | 0.138               | 25                  | COG | 8.3pF       | ±0.5pF                | CLR1C8R3DA1INN# |
| 532 | 0.138               | 25                  | COG | 8.4pF       | ±0.05pF               | CLR1C8R4AA1INN# |
| 533 | 0.138               | 25                  | COG | 8.4pF       | ±0.1pF                | CLR1C8R4BA1INN# |
| 534 | 0.138               | 25                  | COG | 8.4pF       | ±0.25pF               | CLR1C8R4CA1INN# |
| 535 | 0.138               | 25                  | COG | 8.4pF       | ±0.5pF                | CLR1C8R4DA1INN# |
| 536 | 0.138               | 25                  | COG | 8.5pF       | ±0.05pF               | CLR1C8R5AA1INN# |
| 537 | 0.138               | 25                  | COG | 8.5pF       | ±0.1pF                | CLR1C8R5BA1INN# |
| 538 | 0.138               | 25                  | COG | 8.5pF       | ±0.25pF               | CLR1C8R5CA1INN# |
| 539 | 0.138               | 25                  | COG | 8.5pF       | ±0.5pF                | CLR1C8R5DA1INN# |
| 540 | 0.138               | 25                  | COG | 8.6pF       | ±0.05pF               | CLR1C8R6AA1INN# |
| 541 | 0.138               | 25                  | COG | 8.6pF       | ±0.1pF                | CLR1C8R6BA1INN# |
| 542 | 0.138               | 25                  | COG | 8.6pF       | ±0.25pF               | CLR1C8R6CA1INN# |
| 543 | 0.138               | 25                  | COG | 8.6pF       | ±0.5pF                | CLR1C8R6DA1INN# |
| 544 | 0.138               | 25                  | COG | 8.7pF       | ±0.05pF               | CLR1C8R7AA1INN# |
| 545 | 0.138               | 25                  | COG | 8.7pF       | ±0.1pF                | CLR1C8R7BA1INN# |
| 546 | 0.138               | 25                  | COG | 8.7pF       | ±0.25pF               | CLR1C8R7CA1INN# |
| 547 | 0.138               | 25                  | COG | 8.7pF       | ±0.5pF                | CLR1C8R7DA1INN# |
| 548 | 0.138               | 25                  | COG | 8.8pF       | ±0.05pF               | CLR1C8R8AA1INN# |
| 549 | 0.138               | 25                  | COG | 8.8pF       | ±0.1pF                | CLR1C8R8BA1INN# |
| 550 | 0.138               | 25                  | COG | 8.8pF       | ±0.25pF               | CLR1C8R8CA1INN# |
| 551 | 0.138               | 25                  | COG | 8.8pF       | ±0.5pF                | CLR1C8R8DA1INN# |
| 552 | 0.138               | 25                  | COG | 8.9pF       | ±0.05pF               | CLR1C8R9AA1INN# |
| 553 | 0.138               | 25                  | COG | 8.9pF       | ±0.1pF                | CLR1C8R9BA1INN# |
| 554 | 0.138               | 25                  | COG | 8.9pF       | ±0.25pF               | CLR1C8R9CA1INN# |
| 555 | 0.138               | 25                  | COG | 8.9pF       | ±0.5pF                | CLR1C8R9DA1INN# |
| 556 | 0.138               | 25                  | COG | 9pF         | ±0.05pF               | CLR1C090AA1INN# |
| 557 | 0.138               | 25                  | COG | 9pF         | ±0.1pF                | CLR1C090BA1INN# |
| 558 | 0.138               | 25                  | COG | 9pF         | ±0.25pF               | CLR1C090CA1INN# |
| 559 | 0.138               | 25                  | COG | 9pF         | ±0.5pF                | CLR1C090DA1INN# |
| 560 | 0.138               | 25                  | COG | 9.1pF       | ±0.05pF               | CLR1C9R1AA1INN# |
| 561 | 0.138               | 25                  | COG | 9.1pF       | ±0.1pF                | CLR1C9R1BA1INN# |
| 562 | 0.138               | 25                  | COG | 9.1pF       | ±0.25pF               | CLR1C9R1CA1INN# |
| 563 | 0.138               | 25                  | COG | 9.1pF       | ±0.5pF                | CLR1C9R1DA1INN# |
| 564 | 0.138               | 25                  | COG | 9.2pF       | ±0.05pF               | CLR1C9R2AA1INN# |
| 565 | 0.138               | 25                  | COG | 9.2pF       | ±0.1pF                | CLR1C9R2BA1INN# |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 008004/0201

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 566 | 0.138               | 25                  | COG | 9.2pF       | ±0.25pF               | CLR1C9R2CA1INN# |
| 567 | 0.138               | 25                  | COG | 9.2pF       | ±0.5pF                | CLR1C9R2DA1INN# |
| 568 | 0.138               | 25                  | COG | 9.3pF       | ±0.05pF               | CLR1C9R3AA1INN# |
| 569 | 0.138               | 25                  | COG | 9.3pF       | ±0.1pF                | CLR1C9R3BA1INN# |
| 570 | 0.138               | 25                  | COG | 9.3pF       | ±0.25pF               | CLR1C9R3CA1INN# |
| 571 | 0.138               | 25                  | COG | 9.3pF       | ±0.5pF                | CLR1C9R3DA1INN# |
| 572 | 0.138               | 25                  | COG | 9.4pF       | ±0.05pF               | CLR1C9R4AA1INN# |
| 573 | 0.138               | 25                  | COG | 9.4pF       | ±0.1pF                | CLR1C9R4BA1INN# |
| 574 | 0.138               | 25                  | COG | 9.4pF       | ±0.25pF               | CLR1C9R4CA1INN# |
| 575 | 0.138               | 25                  | COG | 9.4pF       | ±0.5pF                | CLR1C9R4DA1INN# |
| 576 | 0.138               | 25                  | COG | 9.5pF       | ±0.05pF               | CLR1C9R5AA1INN# |
| 577 | 0.138               | 25                  | COG | 9.5pF       | ±0.1pF                | CLR1C9R5BA1INN# |
| 578 | 0.138               | 25                  | COG | 9.5pF       | ±0.25pF               | CLR1C9R5CA1INN# |
| 579 | 0.138               | 25                  | COG | 9.5pF       | ±0.5pF                | CLR1C9R5DA1INN# |
| 580 | 0.138               | 25                  | COG | 9.6pF       | ±0.05pF               | CLR1C9R6AA1INN# |
| 581 | 0.138               | 25                  | COG | 9.6pF       | ±0.1pF                | CLR1C9R6BA1INN# |
| 582 | 0.138               | 25                  | COG | 9.6pF       | ±0.25pF               | CLR1C9R6CA1INN# |
| 583 | 0.138               | 25                  | COG | 9.6pF       | ±0.5pF                | CLR1C9R6DA1INN# |
| 584 | 0.138               | 25                  | COG | 9.7pF       | ±0.05pF               | CLR1C9R7AA1INN# |
| 585 | 0.138               | 25                  | COG | 9.7pF       | ±0.1pF                | CLR1C9R7BA1INN# |
| 586 | 0.138               | 25                  | COG | 9.7pF       | ±0.25pF               | CLR1C9R7CA1INN# |
| 587 | 0.138               | 25                  | COG | 9.7pF       | ±0.5pF                | CLR1C9R7DA1INN# |
| 588 | 0.138               | 25                  | COG | 9.8pF       | ±0.05pF               | CLR1C9R8AA1INN# |
| 589 | 0.138               | 25                  | COG | 9.8pF       | ±0.1pF                | CLR1C9R8BA1INN# |
| 590 | 0.138               | 25                  | COG | 9.8pF       | ±0.25pF               | CLR1C9R8CA1INN# |
| 591 | 0.138               | 25                  | COG | 9.8pF       | ±0.5pF                | CLR1C9R8DA1INN# |
| 592 | 0.138               | 25                  | COG | 9.9pF       | ±0.05pF               | CLR1C9R9AA1INN# |
| 593 | 0.138               | 25                  | COG | 9.9pF       | ±0.1pF                | CLR1C9R9BA1INN# |
| 594 | 0.138               | 25                  | COG | 9.9pF       | ±0.25pF               | CLR1C9R9CA1INN# |
| 595 | 0.138               | 25                  | COG | 9.9pF       | ±0.5pF                | CLR1C9R9DA1INN# |
| 596 | 0.138               | 25                  | COG | 10pF        | ±0.05pF               | CLR1C100AA1INN# |
| 597 | 0.138               | 25                  | COG | 10pF        | ±0.1pF                | CLR1C100BA1INN# |
| 598 | 0.138               | 25                  | COG | 10pF        | ±0.1pF                | CLR1C100BA1NNN# |
| 599 | 0.138               | 25                  | COG | 10pF        | ±0.25pF               | CLR1C100CA1INN# |
| 600 | 0.138               | 25                  | COG | 10pF        | ±0.5pF                | CLR1C100DA1INN# |
| 601 | 0.138               | 25                  | COG | 10pF        | ±2%                   | CLR1C100GA1INN# |
| 602 | 0.138               | 25                  | COG | 10pF        | ±5%                   | CLR1C100JA1INN# |
| 603 | 0.138               | 25                  | COG | 18pF        | ±5%                   | CLR1C180JA1NNN# |
| 604 | 0.138               | 25                  | COG | 36pF        | ±5%                   | CLR1C360JA1NNN# |
| 605 | 0.138               | 25                  | COG | 47pF        | ±5%                   | CLR1C470JA1NNN# |
| 606 | 0.138               | 25                  | COG | 56pF        | ±5%                   | CLR1C560JA1NNN# |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 01005/0402

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number      |
|-----|---------------------|---------------------|-----|-------------|-----------------------|------------------|
| 1   | 0.22                | 6.3                 | COG | 100pF       | ±5%                   | CL02C101JQ2NINN# |
| 2   | 0.22                | 16                  | COG | 10pF        | ±5%                   | CL02C100JO2ANN#  |
| 3   | 0.22                | 16                  | COG | 10pF        | ±5%                   | CL02C100JO2NINN# |
| 4   | 0.22                | 16                  | COG | 11pF        | ±5%                   | CL02C110JO2NINN# |
| 5   | 0.22                | 16                  | COG | 13pF        | ±5%                   | CL02C130JO2NINN# |
| 6   | 0.22                | 16                  | COG | 16pF        | ±5%                   | CL02C160JO2NINN# |
| 7   | 0.22                | 16                  | COG | 18pF        | ±5%                   | CL02C180JO2NINN# |
| 8   | 0.22                | 16                  | COG | 20pF        | ±5%                   | CL02C200JO2NINN# |
| 9   | 0.22                | 16                  | COG | 22pF        | ±5%                   | CL02C220JO2NINN# |
| 10  | 0.22                | 16                  | COG | 24pF        | ±5%                   | CL02C240JO2NINN# |
| 11  | 0.22                | 16                  | COG | 27pF        | ±5%                   | CL02C270JO2NINN# |
| 12  | 0.22                | 16                  | COG | 30pF        | ±5%                   | CL02C300JO2NINN# |
| 13  | 0.22                | 16                  | COG | 33pF        | ±5%                   | CL02C330JO2ANN#  |
| 14  | 0.22                | 16                  | COG | 33pF        | ±5%                   | CL02C330JO2NINN# |
| 15  | 0.22                | 16                  | COG | 36pF        | ±5%                   | CL02C360JO2NINN# |
| 16  | 0.22                | 16                  | COG | 39pF        | ±5%                   | CL02C390JO2NINN# |
| 17  | 0.22                | 16                  | COG | 43pF        | ±5%                   | CL02C430JO2NINN# |
| 18  | 0.22                | 16                  | COG | 47pF        | ±5%                   | CL02C470JO2ANN#  |
| 19  | 0.22                | 16                  | COG | 51pF        | ±5%                   | CL02C510JO2NINN# |
| 20  | 0.22                | 16                  | COG | 56pF        | ±5%                   | CL02C560JO2NINN# |
| 21  | 0.22                | 16                  | COG | 62pF        | ±5%                   | CL02C620JO2NINN# |
| 22  | 0.22                | 16                  | COG | 68pF        | ±5%                   | CL02C680JO2NINN# |
| 23  | 0.22                | 16                  | COG | 75pF        | ±5%                   | CL02C750JO2NINN# |
| 24  | 0.22                | 16                  | COG | 82pF        | ±5%                   | CL02C820JO2NINN# |
| 25  | 0.22                | 16                  | COG | 91pF        | ±5%                   | CL02C910JO2NINN# |
| 26  | 0.22                | 16                  | COG | 100pF       | ±5%                   | CL02C101JO2NINN# |
| 27  | 0.22                | 25                  | COG | 10pF        | ±5%                   | CL02C100JA2NINN# |
| 28  | 0.22                | 25                  | COG | 11pF        | ±5%                   | CL02C110JA2NINN# |
| 29  | 0.22                | 25                  | COG | 12pF        | ±5%                   | CL02C120JA2NINN# |
| 30  | 0.22                | 25                  | COG | 13pF        | ±5%                   | CL02C130JA2NINN# |
| 31  | 0.22                | 25                  | COG | 15pF        | ±5%                   | CL02C150JA2NINN# |
| 32  | 0.22                | 25                  | COG | 16pF        | ±5%                   | CL02C160JA2NINN# |
| 33  | 0.22                | 25                  | COG | 18pF        | ±5%                   | CL02C180JA2NINN# |
| 34  | 0.22                | 25                  | COG | 20pF        | ±5%                   | CL02C200JA2NINN# |
| 35  | 0.22                | 25                  | COG | 22pF        | ±5%                   | CL02C220JA2NINN# |
| 36  | 0.22                | 25                  | COG | 24pF        | ±5%                   | CL02C240JA2NINN# |
| 37  | 0.22                | 25                  | COG | 27pF        | ±5%                   | CL02C270JA2NINN# |
| 38  | 0.22                | 25                  | COG | 30pF        | ±5%                   | CL02C300JA2NINN# |
| 39  | 0.22                | 25                  | COG | 33pF        | ±5%                   | CL02C330JA2NINN# |
| 40  | 0.22                | 25                  | COG | 36pF        | ±5%                   | CL02C360JA2NINN# |
| 41  | 0.22                | 25                  | COG | 39pF        | ±5%                   | CL02C390JA2NINN# |
| 42  | 0.22                | 25                  | COG | 43pF        | ±5%                   | CL02C430JA2NINN# |
| 43  | 0.22                | 25                  | COG | 47pF        | ±5%                   | CL02C470JA2NINN# |
| 44  | 0.22                | 25                  | COG | 51pF        | ±5%                   | CL02C510JA2NINN# |
| 45  | 0.22                | 25                  | COG | 56pF        | ±5%                   | CL02C560JA2NINN# |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 01005/0402

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number      |
|-----|---------------------|---------------------|-----|-------------|-----------------------|------------------|
| 46  | 0.22                | 25                  | COG | 62pF        | ±5%                   | CL02C620JA2N1NN# |
| 47  | 0.22                | 25                  | COG | 68pF        | ±5%                   | CL02C680JA2N1NN# |
| 48  | 0.22                | 25                  | COG | 75pF        | ±5%                   | CL02C750JA2N1NN# |
| 49  | 0.22                | 25                  | COG | 82pF        | ±5%                   | CL02C820JA2N1NN# |
| 50  | 0.22                | 25                  | COG | 91pF        | ±5%                   | CL02C910JA2N1NN# |
| 51  | 0.22                | 25                  | COG | 100pF       | ±5%                   | CL02C101JA2N1NN# |
| 52  | 0.22                | 25                  | COG | 220pF       | ±5%                   | CL02C221JA2N1NN# |
| 53  | 0.22                | 50                  | COG | 100pF       | ±5%                   | CL02C101JB2N1NN# |

Size Code (inch/mm) : 0201/0603

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number      |
|-----|---------------------|---------------------|-----|-------------|-----------------------|------------------|
| 1   | 0.33                | 25                  | COG | 0.2pF       | ±0.1pF                | CL03C0R2BA3G1NN# |
| 2   | 0.33                | 25                  | COG | 0.5pF       | ±0.1pF                | CL03C0R5BA3G1NN# |
| 3   | 0.33                | 25                  | COG | 0.5pF       | ±0.25pF               | CL03C0R5CA3G1NN# |
| 4   | 0.33                | 25                  | COG | 1pF         | ±0.1pF                | CL03C010BA3G1NN# |
| 5   | 0.33                | 25                  | COG | 1pF         | ±0.25pF               | CL03C010CA3G1NN# |
| 6   | 0.33                | 25                  | COG | 1.2pF       | ±0.1pF                | CL03C1R2BA3G1NN# |
| 7   | 0.33                | 25                  | COG | 1.2pF       | ±0.25pF               | CL03C1R2CA3G1NN# |
| 8   | 0.33                | 25                  | COG | 1.5pF       | ±0.25pF               | CL03C1R5CA3G1NN# |
| 9   | 0.33                | 25                  | COG | 1.8pF       | ±0.25pF               | CL03C1R8CA3G1NN# |
| 10  | 0.33                | 25                  | COG | 2.2pF       | ±0.1pF                | CL03C2R2BA3G1NN# |
| 11  | 0.33                | 25                  | COG | 2.2pF       | ±0.25pF               | CL03C2R2CA3G1NN# |
| 12  | 0.33                | 25                  | COG | 2.7pF       | ±0.25pF               | CL03C2R7CA3G1NN# |
| 13  | 0.33                | 25                  | COG | 3pF         | ±0.1pF                | CL03C030BA3G1NN# |
| 14  | 0.33                | 25                  | COG | 4.7pF       | ±0.25pF               | CL03C4R7CA3G1NN# |
| 15  | 0.33                | 25                  | COG | 5pF         | ±0.25pF               | CL03C050CA3G1NN# |
| 16  | 0.33                | 25                  | COG | 5.6pF       | ±0.25pF               | CL03C5R6CA3G1NN# |
| 17  | 0.33                | 25                  | COG | 6pF         | ±0.5pF                | CL03C060DA3G1NN# |
| 18  | 0.33                | 25                  | COG | 6.8pF       | ±0.25pF               | CL03C6R8CA3G1NN# |
| 19  | 0.33                | 25                  | COG | 6.8pF       | ±0.5pF                | CL03C6R8DA3G1NN# |
| 20  | 0.33                | 25                  | COG | 9pF         | ±0.25pF               | CL03C090CA3G1NN# |
| 21  | 0.33                | 25                  | COG | 10pF        | ±5%                   | CL03C100JA3G1NN# |
| 22  | 0.33                | 25                  | COG | 10pF        | ±5%                   | CL03C100JA3N1NN# |
| 23  | 0.33                | 25                  | COG | 11pF        | ±5%                   | CL03C110JA3G1NN# |
| 24  | 0.33                | 25                  | COG | 11pF        | ±5%                   | CL03C110JA3N1NN# |
| 25  | 0.33                | 25                  | COG | 12pF        | ±5%                   | CL03C120JA3G1NN# |
| 26  | 0.33                | 25                  | COG | 12pF        | ±5%                   | CL03C120JA3N1NN# |
| 27  | 0.33                | 25                  | COG | 13pF        | ±5%                   | CL03C130JA3G1NN# |
| 28  | 0.33                | 25                  | COG | 15pF        | ±5%                   | CL03C150JA3N1NN# |
| 29  | 0.33                | 25                  | COG | 16pF        | ±5%                   | CL03C160JA3G1NN# |
| 30  | 0.33                | 25                  | COG | 18pF        | ±5%                   | CL03C180JA3G1NN# |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 0201/0603

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 31  | 0.33                | 25                  | COG | 18pF        | ±5%                   | CL03C180JA3NNN# |
| 32  | 0.33                | 25                  | COG | 20pF        | ±5%                   | CL03C200JA3GNN# |
| 33  | 0.33                | 25                  | COG | 20pF        | ±5%                   | CL03C200JA3NNN# |
| 34  | 0.33                | 25                  | COG | 22pF        | ±5%                   | CL03C220JA3GNN# |
| 35  | 0.33                | 25                  | COG | 22pF        | ±5%                   | CL03C220JA3NNN# |
| 36  | 0.33                | 25                  | COG | 24pF        | ±5%                   | CL03C240JA3GNN# |
| 37  | 0.33                | 25                  | COG | 27pF        | ±5%                   | CL03C270JA3GNN# |
| 38  | 0.33                | 25                  | COG | 27pF        | ±5%                   | CL03C270JA3NNN# |
| 39  | 0.33                | 25                  | COG | 30pF        | ±5%                   | CL03C300JA3GNN# |
| 40  | 0.33                | 25                  | COG | 30pF        | ±5%                   | CL03C300JA3NNN# |
| 41  | 0.33                | 25                  | COG | 33pF        | ±5%                   | CL03C330JA3NNN# |
| 42  | 0.33                | 25                  | COG | 39pF        | ±5%                   | CL03C390JA3NNN# |
| 43  | 0.33                | 25                  | COG | 47pF        | ±5%                   | CL03C470JA3NNN# |
| 44  | 0.33                | 25                  | COG | 56pF        | ±5%                   | CL03C560JA3NNN# |
| 45  | 0.33                | 25                  | COG | 68pF        | ±5%                   | CL03C680JA3NNN# |
| 46  | 0.33                | 25                  | COG | 82pF        | ±5%                   | CL03C820JA3NNN# |
| 47  | 0.33                | 25                  | COG | 100pF       | ±5%                   | CL03C101JA3NNN# |
| 48  | 0.33                | 50                  | COG | 1pF         | ±0.1pF                | CL03C010BB3GNN# |
| 49  | 0.33                | 50                  | COG | 1.2pF       | ±0.1pF                | CL03C1R2BB3GNN# |
| 50  | 0.33                | 50                  | COG | 2pF         | ±0.1pF                | CL03C020BB3GNN# |
| 51  | 0.33                | 50                  | COG | 2.7pF       | ±0.1pF                | CL03C2R7BB3GNN# |
| 52  | 0.33                | 50                  | COG | 3.3pF       | ±0.1pF                | CL03C3R3BB3GNN# |
| 53  | 0.33                | 50                  | COG | 10pF        | ±5%                   | CL03C100JB3GNN# |
| 54  | 0.33                | 50                  | COG | 10pF        | ±5%                   | CL03C100JB3NNN# |
| 55  | 0.33                | 50                  | COG | 12pF        | ±5%                   | CL03C120JB3NNN# |
| 56  | 0.33                | 50                  | COG | 15pF        | ±5%                   | CL03C150JB3NNN# |
| 57  | 0.33                | 50                  | COG | 22pF        | ±5%                   | CL03C220JB3NNN# |
| 58  | 0.33                | 50                  | COG | 27pF        | ±5%                   | CL03C270JB3GNN# |
| 59  | 0.33                | 50                  | COG | 27pF        | ±5%                   | CL03C270JB3NNN# |
| 60  | 0.33                | 50                  | COG | 33pF        | ±5%                   | CL03C330JB3NNN# |
| 61  | 0.33                | 50                  | COG | 39pF        | ±2%                   | CL03C390GB3NNN# |
| 62  | 0.33                | 50                  | COG | 39pF        | ±5%                   | CL03C390JB3NNN# |
| 63  | 0.33                | 50                  | COG | 47pF        | ±5%                   | CL03C470JB3NNN# |
| 64  | 0.33                | 50                  | COG | 100pF       | ±5%                   | CL03C101JB3NNN# |
| 65  | 0.33                | 100                 | COG | 100pF       | ±5%                   | CL03C101JC3NNN# |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 0402/1005

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 0.55                | 16                  | COG | 1nF         | ±5%                   | CL05C102J05NNN# |
| 2   | 0.55                | 16                  | COG | 100pF       | ±5%                   | CL05C101J05NNN# |
| 3   | 0.55                | 16                  | COG | 220pF       | ±5%                   | CL05C221J05NNN# |
| 4   | 0.55                | 25                  | COG | 1nF         | ±5%                   | CL05C102JA5NFN# |
| 5   | 0.55                | 25                  | COG | 20pF        | ±5%                   | CL05C200JA5NNN# |
| 6   | 0.55                | 25                  | COG | 22pF        | ±5%                   | CL05C220JA5NNN# |
| 7   | 0.55                | 25                  | COG | 27pF        | ±5%                   | CL05C270JA5NNN# |
| 8   | 0.55                | 25                  | COG | 56pF        | ±5%                   | CL05C560JA5NNN# |
| 9   | 0.55                | 25                  | COG | 82pF        | ±5%                   | CL05C820JA5NNN# |
| 10  | 0.55                | 25                  | COG | 180pF       | ±5%                   | CL05C181JA5NNN# |
| 11  | 0.55                | 25                  | COG | 560pF       | ±5%                   | CL05C561JA5NNN# |
| 12  | 0.55                | 50                  | COG | 1nF         | ±5%                   | CL05C102JB5NNN# |
| 13  | 0.55                | 50                  | COG | 1pF         | ±0.25pF               | CL05C010CB5NNN# |
| 14  | 0.55                | 50                  | COG | 3.3pF       | ±0.25pF               | CL05C3R3CB5NNN# |
| 15  | 0.55                | 50                  | COG | 3.9pF       | ±0.25pF               | CL05C3R9CB5NNN# |
| 16  | 0.55                | 50                  | COG | 4.7pF       | ±0.25pF               | CL05C4R7CB5NNN# |
| 17  | 0.55                | 50                  | COG | 5pF         | ±0.25pF               | CL05C050CB5NNN# |
| 18  | 0.55                | 50                  | COG | 6.8pF       | ±0.25pF               | CL05C6R8CB5NNN# |
| 19  | 0.55                | 50                  | COG | 8.2pF       | ±0.25pF               | CL05C8R2CB5NNN# |
| 20  | 0.55                | 50                  | COG | 9pF         | ±0.25pF               | CL05C090CB5NNN# |
| 21  | 0.55                | 50                  | COG | 9pF         | ±0.5pF                | CL05C090DB5NNN# |
| 22  | 0.55                | 50                  | COG | 10pF        | ±0.5pF                | CL05C100DB5NNN# |
| 23  | 0.55                | 50                  | COG | 10pF        | ±5%                   | CL05C100JB5NCC# |
| 24  | 0.55                | 50                  | COG | 10pF        | ±5%                   | CL05C100JB5NFC# |
| 25  | 0.55                | 50                  | COG | 10pF        | ±5%                   | CL05C100JB5NNN# |
| 26  | 0.55                | 50                  | COG | 11pF        | ±5%                   | CL05C110JB5NNN# |
| 27  | 0.55                | 50                  | COG | 12pF        | ±5%                   | CL05C120JB5NCC# |
| 28  | 0.55                | 50                  | COG | 12pF        | ±5%                   | CL05C120JB5NNN# |
| 29  | 0.55                | 50                  | COG | 13pF        | ±5%                   | CL05C130JB5NCC# |
| 30  | 0.55                | 50                  | COG | 15pF        | ±5%                   | CL05C150JB5NCC# |
| 31  | 0.55                | 50                  | COG | 15pF        | ±5%                   | CL05C150JB5NNN# |
| 32  | 0.55                | 50                  | COG | 16pF        | ±5%                   | CL05C160JB5NCC# |
| 33  | 0.55                | 50                  | COG | 17pF        | ±5%                   | CL05C170JB5NNN# |
| 34  | 0.55                | 50                  | COG | 18pF        | ±2%                   | CL05C180GB5NNN# |
| 35  | 0.55                | 50                  | COG | 18pF        | ±5%                   | CL05C180JB5NCC# |
| 36  | 0.55                | 50                  | COG | 18pF        | ±5%                   | CL05C180JB5NFC# |
| 37  | 0.55                | 50                  | COG | 18pF        | ±5%                   | CL05C180JB5NNN# |
| 38  | 0.55                | 50                  | COG | 19pF        | ±5%                   | CL05C190JB5NNN# |
| 39  | 0.55                | 50                  | COG | 22pF        | ±5%                   | CL05C220JB5NCC# |
| 40  | 0.55                | 50                  | COG | 22pF        | ±5%                   | CL05C220JB5NFC# |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 0402/1005

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number      |
|-----|---------------------|---------------------|-----|-------------|-----------------------|------------------|
| 41  | 0.55                | 50                  | COG | 22pF        | ±5%                   | CL05C220JB5NINN# |
| 42  | 0.55                | 50                  | COG | 24pF        | ±5%                   | CL05C240JB5NINN# |
| 43  | 0.55                | 50                  | COG | 24pF        | ±5%                   | CL05C240JB5NINN# |
| 44  | 0.55                | 50                  | COG | 27pF        | ±5%                   | CL05C270JB5NINN# |
| 45  | 0.55                | 50                  | COG | 27pF        | ±5%                   | CL05C270JB5NINN# |
| 46  | 0.55                | 50                  | COG | 30pF        | ±5%                   | CL05C300JB5NINN# |
| 47  | 0.55                | 50                  | COG | 33pF        | ±5%                   | CL05C330JB5NINN# |
| 48  | 0.55                | 50                  | COG | 33pF        | ±5%                   | CL05C330JB5NINN# |
| 49  | 0.55                | 50                  | COG | 33pF        | ±5%                   | CL05C330JB5NINN# |
| 50  | 0.55                | 50                  | COG | 36pF        | ±5%                   | CL05C360JB5NINN# |
| 51  | 0.55                | 50                  | COG | 39pF        | ±5%                   | CL05C390JB5NINN# |
| 52  | 0.55                | 50                  | COG | 39pF        | ±5%                   | CL05C390JB5NINN# |
| 53  | 0.55                | 50                  | COG | 43pF        | ±5%                   | CL05C430JB5NINN# |
| 54  | 0.55                | 50                  | COG | 47pF        | ±5%                   | CL05C470JB5NINN# |
| 55  | 0.55                | 50                  | COG | 47pF        | ±5%                   | CL05C470JB5NINN# |
| 56  | 0.55                | 50                  | COG | 47pF        | ±5%                   | CL05C470JB5NINN# |
| 57  | 0.55                | 50                  | COG | 56pF        | ±5%                   | CL05C560JB5NINN# |
| 58  | 0.55                | 50                  | COG | 62pF        | ±5%                   | CL05C620JB5NINN# |
| 59  | 0.55                | 50                  | COG | 62pF        | ±5%                   | CL05C620JB5NINN# |
| 60  | 0.55                | 50                  | COG | 68pF        | ±5%                   | CL05C680JB5NINN# |
| 61  | 0.55                | 50                  | COG | 68pF        | ±5%                   | CL05C680JB5NINN# |
| 62  | 0.55                | 50                  | COG | 68pF        | ±5%                   | CL05C680JB5NINN# |
| 63  | 0.55                | 50                  | COG | 75pF        | ±5%                   | CL05C750JB5NINN# |
| 64  | 0.55                | 50                  | COG | 82pF        | ±5%                   | CL05C820JB5NINN# |
| 65  | 0.55                | 50                  | COG | 82pF        | ±5%                   | CL05C820JB5NINN# |
| 66  | 0.55                | 50                  | COG | 91pF        | ±5%                   | CL05C910JB5NINN# |
| 67  | 0.55                | 50                  | COG | 100pF       | ±5%                   | CL05C101JB5NINN# |
| 68  | 0.55                | 50                  | COG | 100pF       | ±5%                   | CL05C101JB5NINN# |
| 69  | 0.55                | 50                  | COG | 100pF       | ±5%                   | CL05C101JB5NINN# |
| 70  | 0.55                | 50                  | COG | 120pF       | ±5%                   | CL05C121JB5NINN# |
| 71  | 0.55                | 50                  | COG | 130pF       | ±5%                   | CL05C131JB5NINN# |
| 72  | 0.55                | 50                  | COG | 150pF       | ±5%                   | CL05C151JB5NINN# |
| 73  | 0.55                | 50                  | COG | 150pF       | ±5%                   | CL05C151JB5NINN# |
| 74  | 0.55                | 50                  | COG | 160pF       | ±5%                   | CL05C161JB5NINN# |
| 75  | 0.55                | 50                  | COG | 180pF       | ±5%                   | CL05C181JB5NINN# |
| 76  | 0.55                | 50                  | COG | 200pF       | ±5%                   | CL05C201JB5NINN# |
| 77  | 0.55                | 50                  | COG | 220pF       | ±5%                   | CL05C221JB5NINN# |
| 78  | 0.55                | 50                  | COG | 220pF       | ±5%                   | CL05C221JB5NINN# |
| 79  | 0.55                | 50                  | COG | 270pF       | ±5%                   | CL05C271JB5NINN# |
| 80  | 0.55                | 50                  | COG | 330pF       | ±5%                   | CL05C331JB5NINN# |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 0402/1005

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number      |
|-----|---------------------|---------------------|-----|-------------|-----------------------|------------------|
| 81  | 0.55                | 50                  | COG | 330pF       | ±5%                   | CL05C331JB5NINN# |
| 82  | 0.55                | 50                  | COG | 390pF       | ±5%                   | CL05C391JB5NINN# |
| 83  | 0.55                | 50                  | COG | 390pF       | ±5%                   | CL05C391JB5NINN# |
| 84  | 0.55                | 50                  | COG | 470pF       | ±5%                   | CL05C471JB5NINN# |
| 85  | 0.55                | 50                  | COG | 680pF       | ±5%                   | CL05C681JB5NINN# |
| 86  | 0.55                | 50                  | COG | 680pF       | ±5%                   | CL05C681JB5NINN# |
| 87  | 0.55                | 50                  | COG | 820pF       | ±5%                   | CL05C821JB5NINN# |
| 88  | 0.55                | 100                 | COG | 1nF         | ±5%                   | CL05C102JC5NINN# |
| 89  | 0.55                | 100                 | COG | 12pF        | ±5%                   | CL05C120JC5NINN# |
| 90  | 0.55                | 100                 | COG | 15pF        | ±5%                   | CL05C150JC5NINN# |
| 91  | 0.55                | 100                 | COG | 18pF        | ±5%                   | CL05C180JC5NINN# |
| 92  | 0.55                | 100                 | COG | 27pF        | ±5%                   | CL05C270JC5NINN# |
| 93  | 0.55                | 100                 | COG | 30pF        | ±5%                   | CL05C300JC5NINN# |
| 94  | 0.55                | 100                 | COG | 33pF        | ±5%                   | CL05C330JC5NINN# |
| 95  | 0.55                | 100                 | COG | 39pF        | ±5%                   | CL05C390JC5NINN# |
| 96  | 0.55                | 100                 | COG | 47pF        | ±5%                   | CL05C470JC5NINN# |
| 97  | 0.55                | 100                 | COG | 68pF        | ±5%                   | CL05C680JC5NINN# |
| 98  | 0.55                | 100                 | COG | 82pF        | ±5%                   | CL05C820JC5NINN# |
| 99  | 0.55                | 100                 | COG | 100pF       | ±5%                   | CL05C101JC5NINN# |
| 100 | 0.55                | 100                 | COG | 220pF       | ±5%                   | CL05C221JC5NINN# |
| 101 | 0.65                | 50                  | COG | 4.7nF       | ±5%                   | CL05C472JB5NINN# |

Size Code (inch/mm) : 0603/1608

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number      |
|-----|---------------------|---------------------|-----|-------------|-----------------------|------------------|
| 1   | 0.90                | 16                  | COG | 1nF         | ±5%                   | CL10C102J08NINN# |
| 2   | 0.90                | 16                  | COG | 1.8nF       | ±5%                   | CL10C182J08NINN# |
| 3   | 0.90                | 16                  | COG | 2.2nF       | ±5%                   | CL10C222J08NINN# |
| 4   | 0.90                | 25                  | COG | 1nF         | ±5%                   | CL10C102JA8NINN# |
| 5   | 0.90                | 25                  | COG | 1nF         | ±5%                   | CL10C102JA8NINN# |
| 6   | 0.90                | 25                  | COG | 2.2nF       | ±5%                   | CL10C222JA8NINN# |
| 7   | 0.90                | 25                  | COG | 3.3nF       | ±5%                   | CL10C332JA8NINN# |
| 8   | 0.90                | 25                  | COG | 3.9nF       | ±5%                   | CL10C392JA8NINN# |
| 9   | 0.90                | 25                  | COG | 4.7nF       | ±5%                   | CL10C472JA8NINN# |
| 10  | 0.90                | 25                  | COG | 560pF       | ±5%                   | CL10C561JA8NINN# |
| 11  | 0.90                | 25                  | COG | 680pF       | ±5%                   | CL10C681JA8NINN# |
| 12  | 0.90                | 25                  | COG | 820pF       | ±5%                   | CL10C821JA8NINN# |
| 13  | 0.90                | 50                  | COG | 1nF         | ±5%                   | CL10C102JB8NINN# |
| 14  | 0.90                | 50                  | COG | 1nF         | ±5%                   | CL10C102JB8NINN# |
| 15  | 0.90                | 50                  | COG | 1.2nF       | ±5%                   | CL10C122JB8NINN# |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 0603/1608

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 16  | 0.90                | 50                  | COG | 1.2nF       | ±5%                   | CL10C122JB8NNN# |
| 17  | 0.90                | 50                  | COG | 1.5nF       | ±5%                   | CL10C152JB8NFN# |
| 18  | 0.90                | 50                  | COG | 1.5nF       | ±5%                   | CL10C152JB8NNN# |
| 19  | 0.90                | 50                  | COG | 1.8nF       | ±5%                   | CL10C182JB8NFN# |
| 20  | 0.90                | 50                  | COG | 1.8nF       | ±5%                   | CL10C182JB8NNN# |
| 21  | 0.90                | 50                  | COG | 2.2nF       | ±5%                   | CL10C222JB8NFN# |
| 22  | 0.90                | 50                  | COG | 2.2nF       | ±5%                   | CL10C222JB8NNN# |
| 23  | 0.90                | 50                  | COG | 2.7nF       | ±5%                   | CL10C272JB8NFN# |
| 24  | 0.90                | 50                  | COG | 2.7nF       | ±5%                   | CL10C272JB8NNN# |
| 25  | 0.90                | 50                  | COG | 3.3nF       | ±5%                   | CL10C332JB8NFN# |
| 26  | 0.90                | 50                  | COG | 3.3nF       | ±5%                   | CL10C332JB8NNN# |
| 27  | 0.90                | 50                  | COG | 4.7nF       | ±5%                   | CL10C472JB8NNN# |
| 28  | 0.90                | 50                  | COG | 4.7pF       | ±0.1pF                | CL10C472JB8NNN# |
| 29  | 0.90                | 50                  | COG | 5.6nF       | ±5%                   | CL10C562JB8NNN# |
| 30  | 0.90                | 50                  | COG | 5.6pF       | ±0.1pF                | CL10C562JB8NNN# |
| 31  | 0.90                | 50                  | COG | 10pF        | ±1%                   | CL10C100FB8NNN# |
| 32  | 0.90                | 50                  | COG | 10pF        | ±5%                   | CL10C100JB8NCN# |
| 33  | 0.90                | 50                  | COG | 10pF        | ±5%                   | CL10C100JB8NFN# |
| 34  | 0.90                | 50                  | COG | 10pF        | ±5%                   | CL10C100JB8NNN# |
| 35  | 0.90                | 50                  | COG | 11pF        | ±5%                   | CL10C110JB8NNN# |
| 36  | 0.90                | 50                  | COG | 12pF        | ±5%                   | CL10C120JB8NFN# |
| 37  | 0.90                | 50                  | COG | 12pF        | ±5%                   | CL10C120JB8NNN# |
| 38  | 0.90                | 50                  | COG | 13pF        | ±5%                   | CL10C130JB8NNN# |
| 39  | 0.90                | 50                  | COG | 14pF        | ±5%                   | CL10C140JB8NNN# |
| 40  | 0.90                | 50                  | COG | 15pF        | ±5%                   | CL10C150JB8NCN# |
| 41  | 0.90                | 50                  | COG | 15pF        | ±5%                   | CL10C150JB8NFN# |
| 42  | 0.90                | 50                  | COG | 15pF        | ±5%                   | CL10C150JB8NNN# |
| 43  | 0.90                | 50                  | COG | 18pF        | ±5%                   | CL10C180JB8NFN# |
| 44  | 0.90                | 50                  | COG | 18pF        | ±5%                   | CL10C180JB8NNN# |
| 45  | 0.90                | 50                  | COG | 20pF        | ±5%                   | CL10C200JB8NCN# |
| 46  | 0.90                | 50                  | COG | 20pF        | ±5%                   | CL10C200JB8NFN# |
| 47  | 0.90                | 50                  | COG | 20pF        | ±5%                   | CL10C200JB8NNN# |
| 48  | 0.90                | 50                  | COG | 22pF        | ±5%                   | CL10C220JB8NCN# |
| 49  | 0.90                | 50                  | COG | 22pF        | ±5%                   | CL10C220JB8NFN# |
| 50  | 0.90                | 50                  | COG | 22pF        | ±5%                   | CL10C220JB8NNN# |
| 51  | 0.90                | 50                  | COG | 24pF        | ±5%                   | CL10C240JB8NCN# |
| 52  | 0.90                | 50                  | COG | 25pF        | ±5%                   | CL10C250JB8NNN# |
| 53  | 0.90                | 50                  | COG | 27pF        | ±5%                   | CL10C270JB8NCN# |
| 54  | 0.90                | 50                  | COG | 27pF        | ±5%                   | CL10C270JB8NFN# |
| 55  | 0.90                | 50                  | COG | 27pF        | ±5%                   | CL10C270JB8NNN# |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 0603/1608

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number      |
|-----|---------------------|---------------------|-----|-------------|-----------------------|------------------|
| 56  | 0.90                | 50                  | COG | 30pF        | ±5%                   | CL10C300JB8NCN#  |
| 57  | 0.90                | 50                  | COG | 33pF        | ±5%                   | CL10C330JB8NFN#  |
| 58  | 0.90                | 50                  | COG | 33pF        | ±5%                   | CL10C330JB8NINN# |
| 59  | 0.90                | 50                  | COG | 39pF        | ±5%                   | CL10C390JB8NCN#  |
| 60  | 0.90                | 50                  | COG | 43pF        | ±5%                   | CL10C430JB8NINN# |
| 61  | 0.90                | 50                  | COG | 47pF        | ±5%                   | CL10C470JB8NCN#  |
| 62  | 0.90                | 50                  | COG | 47pF        | ±5%                   | CL10C470JB8NFN#  |
| 63  | 0.90                | 50                  | COG | 47pF        | ±5%                   | CL10C470JB8NINN# |
| 64  | 0.90                | 50                  | COG | 51pF        | ±5%                   | CL10C510JB8NINN# |
| 65  | 0.90                | 50                  | COG | 56pF        | ±5%                   | CL10C560JB8NFN#  |
| 66  | 0.90                | 50                  | COG | 56pF        | ±5%                   | CL10C560JB8NINN# |
| 67  | 0.90                | 50                  | COG | 62pF        | ±5%                   | CL10C620JB8NINN# |
| 68  | 0.90                | 50                  | COG | 68pF        | ±5%                   | CL10C680JB8NCN#  |
| 69  | 0.90                | 50                  | COG | 68pF        | ±5%                   | CL10C680JB8NFN#  |
| 70  | 0.90                | 50                  | COG | 68pF        | ±5%                   | CL10C680JB8NINN# |
| 71  | 0.90                | 50                  | COG | 82pF        | ±5%                   | CL10C820JB8NFN#  |
| 72  | 0.90                | 50                  | COG | 91pF        | ±5%                   | CL10C910JB8NCN#  |
| 73  | 0.90                | 50                  | COG | 91pF        | ±5%                   | CL10C910JB8NINN# |
| 74  | 0.90                | 50                  | COG | 100pF       | ±5%                   | CL10C101JB8NCN#  |
| 75  | 0.90                | 50                  | COG | 100pF       | ±5%                   | CL10C101JB8NFN#  |
| 76  | 0.90                | 50                  | COG | 100pF       | ±5%                   | CL10C101JB8NINN# |
| 77  | 0.90                | 50                  | COG | 110pF       | ±5%                   | CL10C111JB8NINN# |
| 78  | 0.90                | 50                  | COG | 120pF       | ±5%                   | CL10C121JB8NCN#  |
| 79  | 0.90                | 50                  | COG | 120pF       | ±5%                   | CL10C121JB8NFN#  |
| 80  | 0.90                | 50                  | COG | 120pF       | ±5%                   | CL10C121JB8NINN# |
| 81  | 0.90                | 50                  | COG | 150pF       | ±5%                   | CL10C151JB8NCN#  |
| 82  | 0.90                | 50                  | COG | 150pF       | ±5%                   | CL10C151JB8NFN#  |
| 83  | 0.90                | 50                  | COG | 150pF       | ±5%                   | CL10C151JB8NINN# |
| 84  | 0.90                | 50                  | COG | 160pF       | ±5%                   | CL10C161JB8NINN# |
| 85  | 0.90                | 50                  | COG | 180pF       | ±5%                   | CL10C181JB8NFN#  |
| 86  | 0.90                | 50                  | COG | 180pF       | ±5%                   | CL10C181JB8NINN# |
| 87  | 0.90                | 50                  | COG | 200pF       | ±5%                   | CL10C201JB8NFN#  |
| 88  | 0.90                | 50                  | COG | 200pF       | ±5%                   | CL10C201JB8NINN# |
| 89  | 0.90                | 50                  | COG | 220pF       | ±5%                   | CL10C221JB8NCN#  |
| 90  | 0.90                | 50                  | COG | 220pF       | ±5%                   | CL10C221JB8NFN#  |
| 91  | 0.90                | 50                  | COG | 220pF       | ±5%                   | CL10C221JB8NINN# |
| 92  | 0.90                | 50                  | COG | 240pF       | ±5%                   | CL10C241JB8NINN# |
| 93  | 0.90                | 50                  | COG | 270pF       | ±5%                   | CL10C271JB8NFN#  |
| 94  | 0.90                | 50                  | COG | 270pF       | ±5%                   | CL10C271JB8NINN# |
| 95  | 0.90                | 50                  | COG | 330pF       | ±5%                   | CL10C331JB8NCN#  |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 0603/1608

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 96  | 0.90                | 50                  | COG | 330pF       | ±5%                   | CL10C331JB8NFN# |
| 97  | 0.90                | 50                  | COG | 330pF       | ±5%                   | CL10C331JB8NNN# |
| 98  | 0.90                | 50                  | COG | 360pF       | ±5%                   | CL10C361JB8NNN# |
| 99  | 0.90                | 50                  | COG | 390pF       | ±5%                   | CL10C391JB8NFN# |
| 100 | 0.90                | 50                  | COG | 430pF       | ±5%                   | CL10C431JB8NFN# |
| 101 | 0.90                | 50                  | COG | 430pF       | ±5%                   | CL10C431JB8NNN# |
| 102 | 0.90                | 50                  | COG | 470pF       | ±5%                   | CL10C471JB8NCN# |
| 103 | 0.90                | 50                  | COG | 470pF       | ±5%                   | CL10C471JB8NFN# |
| 104 | 0.90                | 50                  | COG | 470pF       | ±5%                   | CL10C471JB8NNN# |
| 105 | 0.90                | 50                  | COG | 510pF       | ±5%                   | CL10C511JB8NNN# |
| 106 | 0.90                | 50                  | COG | 560pF       | ±5%                   | CL10C561JB8NFN# |
| 107 | 0.90                | 50                  | COG | 560pF       | ±5%                   | CL10C561JB8NNN# |
| 108 | 0.90                | 50                  | COG | 620pF       | ±5%                   | CL10C621JB8NNN# |
| 109 | 0.90                | 50                  | COG | 680pF       | ±5%                   | CL10C681JB8NFN# |
| 110 | 0.90                | 50                  | COG | 680pF       | ±5%                   | CL10C681JB8NNN# |
| 111 | 0.90                | 50                  | COG | 750pF       | ±5%                   | CL10C751JB8NNN# |
| 112 | 0.90                | 50                  | COG | 820pF       | ±5%                   | CL10C821JB8NFN# |
| 113 | 0.90                | 100                 | COG | 1nF         | ±5%                   | CL10C102JC8NNN# |
| 114 | 0.90                | 100                 | COG | 3.9nF       | ±5%                   | CL10C392JC8NNN# |
| 115 | 0.90                | 100                 | COG | 10pF        | ±5%                   | CL10C100JC8NNN# |
| 116 | 0.90                | 100                 | COG | 12pF        | ±5%                   | CL10C120JC8NNN# |
| 117 | 0.90                | 100                 | COG | 18pF        | ±5%                   | CL10C180JC8NNN# |
| 118 | 0.90                | 100                 | COG | 39pF        | ±5%                   | CL10C390JC8NNN# |
| 119 | 0.90                | 100                 | COG | 47pF        | ±5%                   | CL10C470JC8NNN# |
| 120 | 0.90                | 100                 | COG | 68pF        | ±5%                   | CL10C680JC8NNN# |
| 121 | 0.90                | 100                 | COG | 100pF       | ±5%                   | CL10C101JC8NNN# |
| 122 | 0.90                | 100                 | COG | 150pF       | ±5%                   | CL10C151JC8NNN# |
| 123 | 0.90                | 100                 | COG | 220pF       | ±5%                   | CL10C221JC8NFN# |
| 124 | 0.90                | 100                 | COG | 270pF       | ±5%                   | CL10C271JC8NNN# |
| 125 | 0.90                | 100                 | COG | 330pF       | ±5%                   | CL10C331JC8NNN# |
| 126 | 0.90                | 100                 | COG | 470pF       | ±5%                   | CL10C471JC8NFN# |
| 127 | 0.90                | 100                 | COG | 470pF       | ±5%                   | CL10C471JC8NNN# |
| 128 | 0.90                | 200                 | COG | 220pF       | ±10%                  | CL10C221KD8NNN# |
| 129 | 0.90                | 200                 | COG | 220pF       | ±5%                   | CL10C221JD8NNN# |
| 130 | 0.90                | 250                 | COG | 470pF       | ±5%                   | CL10C471JE8NFN# |
| 131 | 0.90                | 250                 | COG | 470pF       | ±5%                   | CL10C471JE8NNN# |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 0805/2012

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 0.75                | 25                  | COG | 3.9nF       | ±5%                   | CL21C392JBANNN# |
| 2   | 0.75                | 50                  | COG | 1nF         | ±5%                   | CL21C102JBANNN# |
| 3   | 0.75                | 50                  | COG | 10pF        | ±5%                   | CL21C100JBANFN# |
| 4   | 0.75                | 50                  | COG | 11pF        | ±5%                   | CL21C110JBANNN# |
| 5   | 0.75                | 50                  | COG | 13pF        | ±5%                   | CL21C130JBANNN# |
| 6   | 0.75                | 50                  | COG | 14pF        | ±5%                   | CL21C140JBANNN# |
| 7   | 0.75                | 50                  | COG | 15pF        | ±5%                   | CL21C150JBANFN# |
| 8   | 0.75                | 50                  | COG | 16pF        | ±5%                   | CL21C160JBANNN# |
| 9   | 0.75                | 50                  | COG | 20pF        | ±5%                   | CL21C200JBANNN# |
| 10  | 0.75                | 50                  | COG | 22pF        | ±5%                   | CL21C220JBANFN# |
| 11  | 0.75                | 50                  | COG | 22pF        | ±5%                   | CL21C220JBANNN# |
| 12  | 0.75                | 50                  | COG | 24pF        | ±5%                   | CL21C240JBANNN# |
| 13  | 0.75                | 50                  | COG | 25pF        | ±5%                   | CL21C250JBANNN# |
| 14  | 0.75                | 50                  | COG | 33pF        | ±5%                   | CL21C330JBANFN# |
| 15  | 0.75                | 50                  | COG | 36pF        | ±5%                   | CL21C360JBANNN# |
| 16  | 0.75                | 50                  | COG | 39pF        | ±5%                   | CL21C390JBANFN# |
| 17  | 0.75                | 50                  | COG | 39pF        | ±5%                   | CL21C390JBANNN# |
| 18  | 0.75                | 50                  | COG | 43pF        | ±5%                   | CL21C430JBANNN# |
| 19  | 0.75                | 50                  | COG | 47pF        | ±5%                   | CL21C470JBANFN# |
| 20  | 0.75                | 50                  | COG | 47pF        | ±5%                   | CL21C470JBANNN# |
| 21  | 0.75                | 50                  | COG | 51pF        | ±5%                   | CL21C510JBANNN# |
| 22  | 0.75                | 50                  | COG | 62pF        | ±5%                   | CL21C620JBANNN# |
| 23  | 0.75                | 50                  | COG | 68pF        | ±5%                   | CL21C680JBANFN# |
| 24  | 0.75                | 50                  | COG | 75pF        | ±5%                   | CL21C750JBANNN# |
| 25  | 0.75                | 50                  | COG | 91pF        | ±5%                   | CL21C910JBANNN# |
| 26  | 0.75                | 50                  | COG | 100pF       | ±10%                  | CL21C101KBANFN# |
| 27  | 0.75                | 50                  | COG | 100pF       | ±5%                   | CL21C101JBANFN# |
| 28  | 0.75                | 50                  | COG | 100pF       | ±5%                   | CL21C101JBANNN# |
| 29  | 0.75                | 50                  | COG | 110pF       | ±5%                   | CL21C111JBANNN# |
| 30  | 0.75                | 50                  | COG | 130pF       | ±5%                   | CL21C131JBANNN# |
| 31  | 0.75                | 50                  | COG | 150pF       | ±5%                   | CL21C151JBANFN# |
| 32  | 0.75                | 50                  | COG | 150pF       | ±5%                   | CL21C151JBANNN# |
| 33  | 0.75                | 50                  | COG | 160pF       | ±5%                   | CL21C161JBANNN# |
| 34  | 0.75                | 50                  | COG | 180pF       | ±5%                   | CL21C181JBANNN# |
| 35  | 0.75                | 50                  | COG | 200pF       | ±5%                   | CL21C201JBANNN# |
| 36  | 0.75                | 50                  | COG | 220pF       | ±5%                   | CL21C221JBANFN# |
| 37  | 0.75                | 50                  | COG | 220pF       | ±5%                   | CL21C221JBANNN# |
| 38  | 0.75                | 50                  | COG | 240pF       | ±5%                   | CL21C241JBANNN# |
| 39  | 0.75                | 50                  | COG | 270pF       | ±5%                   | CL21C271JBANFN# |
| 40  | 0.75                | 50                  | COG | 270pF       | ±5%                   | CL21C271JBANNN# |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 0805/2012

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 41  | 0.75                | 50                  | COG | 300pF       | ±5%                   | CL21C301JBANNN# |
| 42  | 0.75                | 50                  | COG | 330pF       | ±5%                   | CL21C331JBANFN# |
| 43  | 0.75                | 50                  | COG | 360pF       | ±5%                   | CL21C361JBANNN# |
| 44  | 0.75                | 50                  | COG | 390pF       | ±5%                   | CL21C391JBANNN# |
| 45  | 0.75                | 50                  | COG | 430pF       | ±5%                   | CL21C431JBANNN# |
| 46  | 0.75                | 50                  | COG | 470pF       | ±5%                   | CL21C471JBANFN# |
| 47  | 0.75                | 50                  | COG | 510pF       | ±5%                   | CL21C511JBANNN# |
| 48  | 0.75                | 50                  | COG | 560pF       | ±5%                   | CL21C561JBANFN# |
| 49  | 0.75                | 50                  | COG | 680pF       | ±5%                   | CL21C681JBANNN# |
| 50  | 0.75                | 100                 | COG | 1nF         | ±5%                   | CL21C102JCANNN# |
| 51  | 0.75                | 100                 | COG | 12pF        | ±5%                   | CL21C120JCANNN# |
| 52  | 0.75                | 100                 | COG | 18pF        | ±5%                   | CL21C180JCANNN# |
| 53  | 0.75                | 100                 | COG | 27pF        | ±5%                   | CL21C270JCANNN# |
| 54  | 0.75                | 100                 | COG | 30pF        | ±5%                   | CL21C300JCANNN# |
| 55  | 0.75                | 100                 | COG | 33pF        | ±5%                   | CL21C330JCANFN# |
| 56  | 0.75                | 100                 | COG | 47pF        | ±5%                   | CL21C470JCANNN# |
| 57  | 0.75                | 100                 | COG | 56pF        | ±5%                   | CL21C560JCANNN# |
| 58  | 0.75                | 100                 | COG | 68pF        | ±5%                   | CL21C680JCANNN# |
| 59  | 0.75                | 100                 | COG | 100pF       | ±5%                   | CL21C101JCANFN# |
| 60  | 0.75                | 100                 | COG | 100pF       | ±5%                   | CL21C101JCANNN# |
| 61  | 0.75                | 100                 | COG | 270pF       | ±5%                   | CL21C271JCANNN# |
| 62  | 0.75                | 100                 | COG | 330pF       | ±5%                   | CL21C331JCANNN# |
| 63  | 0.95                | 25                  | COG | 6.8nF       | ±5%                   | CL21C682JACNNN# |
| 64  | 0.95                | 50                  | COG | 1nF         | ±5%                   | CL21C102JBCNFN# |
| 65  | 0.95                | 50                  | COG | 12pF        | ±5%                   | CL21C120JBCNNN# |
| 66  | 0.95                | 50                  | COG | 33pF        | ±5%                   | CL21C330JBCNNN# |
| 67  | 0.95                | 50                  | COG | 620pF       | ±5%                   | CL21C621JBCNNN# |
| 68  | 0.95                | 50                  | COG | 680pF       | ±5%                   | CL21C681JBCNFN# |
| 69  | 0.95                | 50                  | COG | 750pF       | ±5%                   | CL21C751JBCNNN# |
| 70  | 0.95                | 50                  | COG | 910pF       | ±5%                   | CL21C911JBCNNN# |
| 71  | 0.95                | 100                 | COG | 470pF       | ±5%                   | CL21C471JCCNFN# |
| 72  | 0.95                | 100                 | COG | 560pF       | ±5%                   | CL21C561JCCNNN# |
| 73  | 0.95                | 100                 | COG | 680pF       | ±5%                   | CL21C681JCCNNN# |
| 74  | 0.95                | 200                 | COG | 18pF        | ±5%                   | CL21C180JDCNCN# |
| 75  | 0.95                | 200                 | COG | 20pF        | ±5%                   | CL21C200JDCNCN# |
| 76  | 0.95                | 200                 | COG | 22pF        | ±5%                   | CL21C220JDCNCN# |
| 77  | 0.95                | 200                 | COG | 24pF        | ±5%                   | CL21C240JDCNCN# |
| 78  | 0.95                | 200                 | COG | 33pF        | ±5%                   | CL21C330JDCNCN# |
| 79  | 0.95                | 200                 | COG | 33pF        | ±5%                   | CL21C330JDCNNN# |
| 80  | 0.95                | 200                 | COG | 36pF        | ±5%                   | CL21C360JDCNCN# |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 0805/2012

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number    |
|-----|---------------------|---------------------|-----|-------------|-----------------------|----------------|
| 81  | 0.95                | 200                 | COG | 47pF        | ±5%                   | CL21C470JDCN#  |
| 82  | 0.95                | 200                 | COG | 51pF        | ±5%                   | CL21C510JDCN#  |
| 83  | 0.95                | 200                 | COG | 56pF        | ±5%                   | CL21C560JDCN#  |
| 84  | 0.95                | 200                 | COG | 100pF       | ±5%                   | CL21C101JDCN#  |
| 85  | 0.95                | 200                 | COG | 100pF       | ±5%                   | CL21C101JDCFN# |
| 86  | 0.95                | 200                 | COG | 100pF       | ±5%                   | CL21C101JDCN#  |
| 87  | 0.95                | 200                 | COG | 120pF       | ±5%                   | CL21C121JDCN#  |
| 88  | 0.95                | 200                 | COG | 150pF       | ±5%                   | CL21C151JDCN#  |
| 89  | 0.95                | 200                 | COG | 220pF       | ±5%                   | CL21C221JDCFN# |
| 90  | 0.95                | 200                 | COG | 220pF       | ±5%                   | CL21C221JDCN#  |
| 91  | 1.35                | 25                  | COG | 3.3nF       | ±5%                   | CL21C332JAFN#  |
| 92  | 1.35                | 25                  | COG | 4.7nF       | ±5%                   | CL21C472JAFN#  |
| 93  | 1.35                | 25                  | COG | 8.2nF       | ±5%                   | CL21C822JAFN#  |
| 94  | 1.35                | 25                  | COG | 10nF        | ±5%                   | CL21C103JAFN#  |
| 95  | 1.35                | 50                  | COG | 1.2nF       | ±5%                   | CL21C122JBFN#  |
| 96  | 1.35                | 50                  | COG | 1.5nF       | ±5%                   | CL21C152JBFN#  |
| 97  | 1.35                | 50                  | COG | 1.8nF       | ±5%                   | CL21C182JBFN#  |
| 98  | 1.35                | 50                  | COG | 2nF         | ±5%                   | CL21C202JBFN#  |
| 99  | 1.35                | 50                  | COG | 2.2nF       | ±5%                   | CL21C222JBFN#  |
| 100 | 1.35                | 50                  | COG | 2.2nF       | ±5%                   | CL21C222JBFN#  |
| 101 | 1.35                | 50                  | COG | 2.7nF       | ±5%                   | CL21C272JBFN#  |
| 102 | 1.35                | 50                  | COG | 3.9nF       | ±5%                   | CL21C392JBFN#  |
| 103 | 1.35                | 50                  | COG | 4.7nF       | ±5%                   | CL21C472JBFN#  |
| 104 | 1.35                | 50                  | COG | 4.7nF       | ±5%                   | CL21C472JBFN#  |
| 105 | 1.35                | 50                  | COG | 4.7nF       | ±5%                   | CL21C472JBFN#  |
| 106 | 1.35                | 50                  | COG | 5.6nF       | ±5%                   | CL21C562JBFN#  |
| 107 | 1.35                | 50                  | COG | 6.8nF       | ±5%                   | CL21C682JBFN#  |
| 108 | 1.35                | 50                  | COG | 8.2nF       | ±5%                   | CL21C822JBFN#  |
| 109 | 1.35                | 50                  | COG | 10nF        | ±5%                   | CL21C103JBFN#  |
| 110 | 1.35                | 50                  | COG | 10nF        | ±5%                   | CL21C103JBFN#  |
| 111 | 1.35                | 50                  | COG | 15nF        | ±5%                   | CL21C153JBFN#  |
| 112 | 1.35                | 100                 | COG | 1nF         | ±5%                   | CL21C102JCFN#  |
| 113 | 1.35                | 100                 | COG | 2.2nF       | ±5%                   | CL21C222JCFN#  |
| 114 | 1.35                | 100                 | COG | 3.3nF       | ±5%                   | CL21C332JCFN#  |
| 115 | 1.35                | 100                 | COG | 3.9nF       | ±5%                   | CL21C392JCFN#  |
| 116 | 1.35                | 200                 | COG | 1nF         | ±5%                   | CL21C102JDFN#  |
| 117 | 1.35                | 200                 | COG | 1nF         | ±5%                   | CL21C102JDFN#  |
| 118 | 1.35                | 250                 | COG | 1nF         | ±5%                   | CL21C102JEFN#  |
| 119 | 1.35                | 250                 | COG | 1nF         | ±5%                   | CL21C102JEFN#  |
| 120 | 1.35                | 250                 | COG | 2.2nF       | ±5%                   | CL21C222JEFN#  |
| 121 | 1.45                | 250                 | COG | 10nF        | ±5%                   | CL21C103JEYN#  |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 1206/3216

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 1.00                | 50                  | COG | 1.2nF       | ±5%                   | CL31C122JBCNNN# |
| 2   | 1.00                | 50                  | COG | 1.5nF       | ±5%                   | CL31C152JBCNNN# |
| 3   | 1.00                | 50                  | COG | 1.8nF       | ±5%                   | CL31C182JBCNNN# |
| 4   | 1.00                | 50                  | COG | 2.2nF       | ±5%                   | CL31C222JBCNNN# |
| 5   | 1.00                | 50                  | COG | 10pF        | ±5%                   | CL31C100JBCNNN# |
| 6   | 1.00                | 50                  | COG | 12pF        | ±5%                   | CL31C120JBCNNN# |
| 7   | 1.00                | 50                  | COG | 15pF        | ±5%                   | CL31C150JBCNNN# |
| 8   | 1.00                | 50                  | COG | 18pF        | ±5%                   | CL31C180JBCNNN# |
| 9   | 1.00                | 50                  | COG | 20pF        | ±5%                   | CL31C200JBCNNN# |
| 10  | 1.00                | 50                  | COG | 22pF        | ±5%                   | CL31C220JBCNNN# |
| 11  | 1.00                | 50                  | COG | 27pF        | ±5%                   | CL31C270JBCNNN# |
| 12  | 1.00                | 50                  | COG | 30pF        | ±5%                   | CL31C300JBCNNN# |
| 13  | 1.00                | 50                  | COG | 39pF        | ±5%                   | CL31C390JBCNNN# |
| 14  | 1.00                | 50                  | COG | 51pF        | ±5%                   | CL31C510JBCNNN# |
| 15  | 1.00                | 50                  | COG | 56pF        | ±5%                   | CL31C560JBCNNN# |
| 16  | 1.00                | 50                  | COG | 75pF        | ±5%                   | CL31C750JBCNNN# |
| 17  | 1.00                | 50                  | COG | 82pF        | ±5%                   | CL31C820JBCNNN# |
| 18  | 1.00                | 50                  | COG | 100pF       | ±5%                   | CL31C101JBCNFN# |
| 19  | 1.00                | 50                  | COG | 120pF       | ±5%                   | CL31C121JBCNNN# |
| 20  | 1.00                | 50                  | COG | 180pF       | ±5%                   | CL31C181JBCNNN# |
| 21  | 1.00                | 50                  | COG | 220pF       | ±5%                   | CL31C221JBCNNN# |
| 22  | 1.00                | 50                  | COG | 270pF       | ±5%                   | CL31C271JBCNNN# |
| 23  | 1.00                | 50                  | COG | 330pF       | ±5%                   | CL31C331JBCNNN# |
| 24  | 1.00                | 50                  | COG | 390pF       | ±5%                   | CL31C391JBCNNN# |
| 25  | 1.00                | 50                  | COG | 560pF       | ±5%                   | CL31C561JBCNNN# |
| 26  | 1.00                | 50                  | COG | 680pF       | ±5%                   | CL31C681JBCNNN# |
| 27  | 1.00                | 50                  | COG | 820pF       | ±5%                   | CL31C821JBCNNN# |
| 28  | 1.00                | 100                 | COG | 1.5nF       | ±5%                   | CL31C152JCCNNN# |
| 29  | 1.00                | 100                 | COG | 2.2nF       | ±5%                   | CL31C222JCCNNN# |
| 30  | 1.00                | 100                 | COG | 20pF        | ±5%                   | CL31C200JCCNNN# |
| 31  | 1.00                | 100                 | COG | 22pF        | ±5%                   | CL31C220JCCNNN# |
| 32  | 1.00                | 100                 | COG | 27pF        | ±5%                   | CL31C270JCCNNN# |
| 33  | 1.00                | 100                 | COG | 47pF        | ±5%                   | CL31C470JCCNNN# |
| 34  | 1.00                | 100                 | COG | 150pF       | ±5%                   | CL31C151JCCNNN# |
| 35  | 1.00                | 100                 | COG | 220pF       | ±5%                   | CL31C221JCCNNN# |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 1206/3216

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number   |
|-----|---------------------|---------------------|-----|-------------|-----------------------|---------------|
| 36  | 1.00                | 100                 | COG | 270pF       | ±5%                   | CL31C271JCCN# |
| 37  | 1.00                | 100                 | COG | 330pF       | ±5%                   | CL31C331JCCN# |
| 38  | 1.00                | 100                 | COG | 470pF       | ±5%                   | CL31C471JCCN# |
| 39  | 1.00                | 100                 | COG | 560pF       | ±5%                   | CL31C561JCCN# |
| 40  | 1.00                | 100                 | COG | 680pF       | ±5%                   | CL31C681JCCN# |
| 41  | 1.00                | 200                 | COG | 220pF       | ±5%                   | CL31C221JDCN# |
| 42  | 1.00                | 200                 | COG | 220pF       | ±5%                   | CL31C221JDCN# |
| 43  | 1.30                | 630                 | COG | 1nF         | ±5%                   | CL31C102JHML# |
| 44  | 1.40                | 25                  | COG | 10nF        | ±5%                   | CL31C103JAFN# |
| 45  | 1.40                | 50                  | COG | 3.3nF       | ±5%                   | CL31C332JBFN# |
| 46  | 1.40                | 50                  | COG | 3.9nF       | ±5%                   | CL31C392JBFN# |
| 47  | 1.40                | 50                  | COG | 4.7nF       | ±5%                   | CL31C472JBFN# |
| 48  | 1.40                | 200                 | COG | 1nF         | ±5%                   | CL31C102JDFN# |
| 49  | 1.40                | 500                 | COG | 10pF        | ±5%                   | CL31C100JGFN# |
| 50  | 1.40                | 500                 | COG | 22pF        | ±5%                   | CL31C220JGFN# |
| 51  | 1.40                | 500                 | COG | 33pF        | ±5%                   | CL31C330JGFN# |
| 52  | 1.40                | 500                 | COG | 39pF        | ±5%                   | CL31C390JGFN# |
| 53  | 1.40                | 500                 | COG | 47pF        | ±5%                   | CL31C470JGFN# |
| 54  | 1.40                | 500                 | COG | 47pF        | ±5%                   | CL31C470JGFN# |
| 55  | 1.40                | 500                 | COG | 68pF        | ±5%                   | CL31C680JGFN# |
| 56  | 1.40                | 500                 | COG | 100pF       | ±5%                   | CL31C101JGFN# |
| 57  | 1.40                | 500                 | COG | 100pF       | ±5%                   | CL31C101JGFN# |
| 58  | 1.40                | 500                 | COG | 120pF       | ±5%                   | CL31C121JGFN# |
| 59  | 1.40                | 500                 | COG | 150pF       | ±5%                   | CL31C151JGFN# |
| 60  | 1.40                | 500                 | COG | 180pF       | ±5%                   | CL31C181JGFN# |
| 61  | 1.40                | 500                 | COG | 180pF       | ±5%                   | CL31C181JGFN# |
| 62  | 1.40                | 500                 | COG | 220pF       | ±5%                   | CL31C221JGFN# |
| 63  | 1.40                | 500                 | COG | 220pF       | ±5%                   | CL31C221JGFN# |
| 64  | 1.40                | 500                 | COG | 270pF       | ±5%                   | CL31C271JGFN# |
| 65  | 1.40                | 500                 | COG | 390pF       | ±5%                   | CL31C391JGFN# |
| 66  | 1.40                | 500                 | COG | 390pF       | ±5%                   | CL31C391JGFN# |
| 67  | 1.40                | 500                 | COG | 470pF       | ±5%                   | CL31C471JGFN# |
| 68  | 1.40                | 500                 | COG | 470pF       | ±5%                   | CL31C471JGFN# |
| 69  | 1.40                | 500                 | COG | 560pF       | ±5%                   | CL31C561JGFN# |
| 70  | 1.40                | 500                 | COG | 560pF       | ±5%                   | CL31C561JGFN# |
| 71  | 1.40                | 630                 | COG | 10pF        | ±5%                   | CL31C100JHFN# |
| 72  | 1.40                | 630                 | COG | 10pF        | ±5%                   | CL31C100JHFN# |
| 73  | 1.40                | 630                 | COG | 15pF        | ±5%                   | CL31C150JHFN# |
| 74  | 1.40                | 630                 | COG | 15pF        | ±5%                   | CL31C150JHFN# |
| 75  | 1.40                | 630                 | COG | 22pF        | ±5%                   | CL31C220JHFN# |
| 76  | 1.40                | 630                 | COG | 22pF        | ±5%                   | CL31C220JHFN# |
| 77  | 1.40                | 630                 | COG | 27pF        | ±5%                   | CL31C270JHFN# |
| 78  | 1.40                | 630                 | COG | 33pF        | ±5%                   | CL31C330JHFN# |
| 79  | 1.40                | 630                 | COG | 33pF        | ±5%                   | CL31C330JHFN# |
| 80  | 1.40                | 630                 | COG | 47pF        | ±5%                   | CL31C470JHFN# |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 1206/3216

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 81  | 1.40                | 630                 | COG | 47pF        | ±5%                   | CL31C470JHFNNN# |
| 82  | 1.40                | 630                 | COG | 68pF        | ±5%                   | CL31C680JHFNNN# |
| 83  | 1.40                | 630                 | COG | 100pF       | ±5%                   | CL31C101JHFNNN# |
| 84  | 1.40                | 630                 | COG | 100pF       | ±5%                   | CL31C101JHFNNN# |
| 85  | 1.40                | 630                 | COG | 120pF       | ±5%                   | CL31C121JHFNNN# |
| 86  | 1.40                | 630                 | COG | 150pF       | ±5%                   | CL31C151JHFNNN# |
| 87  | 1.40                | 630                 | COG | 150pF       | ±5%                   | CL31C151JHFNNN# |
| 88  | 1.40                | 630                 | COG | 180pF       | ±5%                   | CL31C181JHFNNN# |
| 89  | 1.40                | 630                 | COG | 220pF       | ±5%                   | CL31C221JHFNNN# |
| 90  | 1.40                | 630                 | COG | 220pF       | ±5%                   | CL31C221JHFNNN# |
| 91  | 1.40                | 630                 | COG | 270pF       | ±5%                   | CL31C271JHFNNN# |
| 92  | 1.40                | 630                 | COG | 330pF       | ±5%                   | CL31C331JHFNNN# |
| 93  | 1.40                | 630                 | COG | 330pF       | ±5%                   | CL31C331JHFNNN# |
| 94  | 1.40                | 630                 | COG | 390pF       | ±5%                   | CL31C391JHFNNN# |
| 95  | 1.40                | 630                 | COG | 470pF       | ±5%                   | CL31C471JHFNNN# |
| 96  | 1.40                | 630                 | COG | 470pF       | ±5%                   | CL31C471JHFNNN# |
| 97  | 1.40                | 1000                | COG | 10pF        | ±5%                   | CL31C100JIFNNN# |
| 98  | 1.40                | 1000                | COG | 22pF        | ±5%                   | CL31C220JIFNNN# |
| 99  | 1.40                | 1000                | COG | 22pF        | ±5%                   | CL31C220JIFNNN# |
| 100 | 1.40                | 1000                | COG | 33pF        | ±5%                   | CL31C330JIFNNN# |
| 101 | 1.40                | 1000                | COG | 33pF        | ±5%                   | CL31C330JIFNNN# |
| 102 | 1.40                | 1000                | COG | 47pF        | ±5%                   | CL31C470JIFNNN# |
| 103 | 1.40                | 1000                | COG | 47pF        | ±5%                   | CL31C470JIFNNN# |
| 104 | 1.40                | 1000                | COG | 68pF        | ±5%                   | CL31C680JIFNNN# |
| 105 | 1.40                | 1000                | COG | 68pF        | ±5%                   | CL31C680JIFNNN# |
| 106 | 1.40                | 1000                | COG | 100pF       | ±5%                   | CL31C101JIFNNN# |
| 107 | 1.40                | 1000                | COG | 100pF       | ±5%                   | CL31C101JIFNNN# |
| 108 | 1.40                | 1000                | COG | 150pF       | ±5%                   | CL31C151JIFNNN# |
| 109 | 1.80                | 16                  | COG | 15nF        | ±5%                   | CL31C153JOHNNN# |
| 110 | 1.80                | 16                  | COG | 120nF       | ±5%                   | CL31C124JOHNNN# |
| 111 | 1.80                | 25                  | COG | 39nF        | ±5%                   | CL31C393JAHNNN# |
| 112 | 1.80                | 25                  | COG | 47nF        | ±5%                   | CL31C473JAHNNN# |
| 113 | 1.80                | 25                  | COG | 100nF       | ±5%                   | CL31C104JAHNNN# |
| 114 | 1.80                | 50                  | COG | 6.8nF       | ±5%                   | CL31C682JBHNNN# |
| 115 | 1.80                | 50                  | COG | 22nF        | ±5%                   | CL31C223JBHNNN# |
| 116 | 1.80                | 50                  | COG | 27nF        | ±5%                   | CL31C273JBHNNN# |
| 117 | 1.80                | 50                  | COG | 33nF        | ±5%                   | CL31C333JBHNNN# |
| 118 | 1.80                | 50                  | COG | 47nF        | ±5%                   | CL31C473JBHNNN# |
| 119 | 1.80                | 100                 | COG | 3.9nF       | ±5%                   | CL31C392JCHNNN# |
| 120 | 1.80                | 100                 | COG | 10nF        | ±5%                   | CL31C103JCHNNN# |
| 121 | 1.80                | 100                 | COG | 22nF        | ±5%                   | CL31C223JCHNNN# |
| 122 | 1.80                | 250                 | COG | 2.2nF       | ±5%                   | CL31C222JEHNNN# |
| 123 | 1.80                | 250                 | COG | 3.9nF       | ±5%                   | CL31C392JEHNNN# |
| 124 | 1.80                | 250                 | COG | 4.7nF       | ±5%                   | CL31C472JEHNNN# |
| 125 | 1.80                | 250                 | COG | 5.6nF       | ±5%                   | CL31C562JEHNNN# |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 1206/3216

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 126 | 1.80                | 250                 | COG | 6.8nF       | ±5%                   | CL31C682JEHNNN# |
| 127 | 1.80                | 250                 | COG | 8.2nF       | ±5%                   | CL31C822JEHNNN# |
| 128 | 1.80                | 250                 | COG | 22nF        | ±5%                   | CL31C223JEHNNN# |
| 129 | 1.80                | 500                 | COG | 1nF         | ±5%                   | CL31C102JGHNFN# |
| 130 | 1.80                | 500                 | COG | 2.2nF       | ±5%                   | CL31C222JGHNNN# |
| 131 | 1.80                | 500                 | COG | 680pF       | ±5%                   | CL31C681JGHNFN# |
| 132 | 1.80                | 500                 | COG | 680pF       | ±5%                   | CL31C681JGHNNN# |
| 133 | 1.80                | 500                 | COG | 820pF       | ±5%                   | CL31C821JGHNNN# |
| 134 | 1.80                | 630                 | COG | 1nF         | ±5%                   | CL31C102JHHNFN# |
| 135 | 1.80                | 630                 | COG | 1nF         | ±5%                   | CL31C102JHHNNN# |
| 136 | 1.80                | 630                 | COG | 1.2nF       | ±5%                   | CL31C122JHHNNN# |
| 137 | 1.80                | 630                 | COG | 1.5nF       | ±5%                   | CL31C152JHHNFN# |
| 138 | 1.80                | 630                 | COG | 1.5nF       | ±5%                   | CL31C152JHHNNN# |
| 139 | 1.80                | 630                 | COG | 1.8nF       | ±5%                   | CL31C182JHHNNN# |
| 140 | 1.80                | 630                 | COG | 2.2nF       | ±5%                   | CL31C222JHHNFN# |
| 141 | 1.80                | 630                 | COG | 2.2nF       | ±5%                   | CL31C222JHHNNN# |
| 142 | 1.80                | 630                 | COG | 2.7nF       | ±5%                   | CL31C272JHHNNN# |
| 143 | 1.80                | 630                 | COG | 3.3nF       | ±5%                   | CL31C332JHHNFN# |
| 144 | 1.80                | 630                 | COG | 3.3nF       | ±5%                   | CL31C332JHHNNN# |
| 145 | 1.80                | 630                 | COG | 10nF        | ±5%                   | CL31C103JHHNNN# |
| 146 | 1.80                | 630                 | COG | 680pF       | ±5%                   | CL31C681JHHNFN# |
| 147 | 1.80                | 630                 | COG | 680pF       | ±5%                   | CL31C681JHHNNN# |
| 148 | 1.80                | 630                 | COG | 820pF       | ±5%                   | CL31C821JHHNNN# |
| 149 | 1.80                | 1000                | COG | 1nF         | ±5%                   | CL31C102JIHNNN# |
| 150 | 1.80                | 1000                | COG | 180pF       | ±5%                   | CL31C181JIHNNN# |
| 151 | 1.80                | 1000                | COG | 220pF       | ±5%                   | CL31C221JIHNFN# |
| 152 | 1.80                | 1000                | COG | 220pF       | ±5%                   | CL31C221JIHNNN# |
| 153 | 1.80                | 1000                | COG | 270pF       | ±5%                   | CL31C271JIHNNN# |
| 154 | 1.80                | 1000                | COG | 330pF       | ±5%                   | CL31C331JIHNNN# |
| 155 | 1.80                | 1000                | COG | 470pF       | ±5%                   | CL31C471JIHNFN# |
| 156 | 1.80                | 1000                | COG | 470pF       | ±5%                   | CL31C471JIHNNN# |
| 157 | 1.80                | 2000                | COG | 15pF        | ±5%                   | CL31C150JIHNNN# |
| 158 | 1.80                | 2000                | COG | 47pF        | ±5%                   | CL31C470JIHNNN# |
| 159 | 1.80                | 2000                | COG | 100pF       | ±5%                   | CL31C101JIHNNN# |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 1210/3225

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 1.45                | 25                  | COG | 10nF        | ±5%                   | CL32C103JAFNNN# |
| 2   | 1.45                | 50                  | COG | 1.8nF       | ±5%                   | CL32C182JBFNNN# |
| 3   | 1.45                | 50                  | COG | 3.3nF       | ±5%                   | CL32C332JBFNNN# |
| 4   | 1.45                | 50                  | COG | 4.7nF       | ±5%                   | CL32C472JBFNNN# |
| 5   | 1.45                | 50                  | COG | 6.8nF       | ±5%                   | CL32C682JBFNNN# |
| 6   | 1.45                | 500                 | COG | 680pF       | ±5%                   | CL32C681JGFNNN# |
| 7   | 1.45                | 2000                | COG | 100pF       | ±5%                   | CL32C101JFNNN#  |
| 8   | 1.80                | 50                  | COG | 11nF        | ±5%                   | CL32C113JBHNNN# |
| 9   | 1.80                | 50                  | COG | 22nF        | ±5%                   | CL32C223JBHNNN# |
| 10  | 1.80                | 500                 | COG | 1.8nF       | ±5%                   | CL32C182JGHNNN# |
| 11  | 1.80                | 630                 | COG | 1.8nF       | ±5%                   | CL32C182JHHNNN# |
| 12  | 2.70                | 100                 | COG | 33nF        | ±5%                   | CL32C333JCJNNN# |
| 13  | 2.70                | 100                 | COG | 47nF        | ±5%                   | CL32C473JCJNNN# |
| 14  | 2.70                | 630                 | COG | 8.2nF       | ±5%                   | CL32C822JHJNNN# |
| 15  | 2.70                | 630                 | COG | 22nF        | ±5%                   | CL32C223JHJNNN# |
| 16  | 2.70                | 630                 | COG | 27nF        | ±5%                   | CL32C273JHJNNN# |
| 17  | 2.70                | 630                 | COG | 33nF        | ±5%                   | CL32C333JHJNNN# |

## Product Lineup (X5R)

Size Code (inch/mm) : 008004/0201

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number      |
|-----|---------------------|---------------------|-----|-------------|-----------------------|------------------|
| 1   | 0.138               | 6.3                 | X5R | 1nF         | ±20%                  | CLR1A102MQ1NINN# |
| 2   | 0.138               | 6.3                 | X5R | 10nF        | ±20%                  | CLR1A103MQ1NINN# |

Size Code (inch/mm) : 01005/0402

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number      |
|-----|---------------------|---------------------|-----|-------------|-----------------------|------------------|
| 1   | 0.22                | 4                   | X5R | 100nF       | ±20%                  | CL02A104MR2NINN# |
| 2   | 0.22                | 4                   | X5R | 220nF       | ±20%                  | CL02A224MR2NINN# |
| 3   | 0.22                | 6.3                 | X5R | 100nF       | ±10%                  | CL02A104KQ2NINN# |
| 4   | 0.22                | 6.3                 | X5R | 100nF       | ±20%                  | CL02A104MQ2NINN# |
| 5   | 0.22                | 6.3                 | X5R | 10nF        | ±10%                  | CL02A103KQ2NINN# |
| 6   | 0.22                | 6.3                 | X5R | 1nF         | ±10%                  | CL02A102KQ2NINN# |
| 7   | 0.22                | 6.3                 | X5R | 2.2nF       | ±10%                  | CL02A222KQ2NINN# |
| 8   | 0.22                | 6.3                 | X5R | 220nF       | ±20%                  | CL02A224MQ2NINN# |
| 9   | 0.22                | 6.3                 | X5R | 470nF       | ±20%                  | CL02A474MQ2NINN# |
| 10  | 0.22                | 10                  | X5R | 10nF        | ±10%                  | CL02A103KP2NINN# |
| 11  | 0.22                | 10                  | X5R | 1nF         | ±10%                  | CL02A102KP2NINN# |
| 12  | 0.25                | 6.3                 | X5R | 1uF         | ±20%                  | CL02A105MQ2NQN#  |
| 13  | 0.25                | 6.3                 | X5R | 470nF       | ±20%                  | CL02A474MQ2NQN#  |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 015008/0502

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 0.275               | 6.3                 | X5R | 1uF         | ±20%                  | CLR5A105MQ2CNN# |

Size Code (inch/mm) : 0201/0603

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number      |
|-----|---------------------|---------------------|-----|-------------|-----------------------|------------------|
| 1   | 0.33                | 6.3                 | X5R | 1uF         | ±20%                  | CL03A105MQ3CNN#  |
| 2   | 0.33                | 6.3                 | X5R | 15nF        | ±10%                  | CL03A153KQ3NINN# |
| 3   | 0.33                | 6.3                 | X5R | 22nF        | ±10%                  | CL03A223KQ3NINN# |
| 4   | 0.33                | 6.3                 | X5R | 47nF        | ±10%                  | CL03A473KQ3NINN# |
| 5   | 0.33                | 6.3                 | X5R | 68nF        | ±10%                  | CL03A683KQ3NINN# |
| 6   | 0.33                | 6.3                 | X5R | 100nF       | ±10%                  | CL03A104KQ3NINN# |
| 7   | 0.33                | 6.3                 | X5R | 100nF       | ±20%                  | CL03A104MQ3NINN# |
| 8   | 0.33                | 6.3                 | X5R | 220nF       | ±10%                  | CL03A224KQ3NINN# |
| 9   | 0.33                | 6.3                 | X5R | 220nF       | ±20%                  | CL03A224MQ3NINN# |
| 10  | 0.33                | 6.3                 | X5R | 470nF       | ±10%                  | CL03A474KQ3NINN# |
| 11  | 0.33                | 6.3                 | X5R | 470nF       | ±10%                  | CL03A474KQ3ZINN# |
| 12  | 0.33                | 6.3                 | X5R | 470nF       | ±20%                  | CL03A474MQ3NINN# |
| 13  | 0.33                | 10                  | X5R | 2.2nF       | ±10%                  | CL03A222KP3NINN# |
| 14  | 0.33                | 10                  | X5R | 4.7nF       | ±10%                  | CL03A472KP3NINN# |
| 15  | 0.33                | 10                  | X5R | 10nF        | ±10%                  | CL03A103KP3NINN# |
| 16  | 0.33                | 10                  | X5R | 47nF        | ±10%                  | CL03A473KP3NINN# |
| 17  | 0.33                | 10                  | X5R | 100nF       | ±10%                  | CL03A104KP3NINN# |
| 18  | 0.33                | 10                  | X5R | 100nF       | ±20%                  | CL03A104MP3NINN# |
| 19  | 0.33                | 10                  | X5R | 220nF       | ±10%                  | CL03A224KP3NINN# |
| 20  | 0.33                | 10                  | X5R | 470nF       | ±10%                  | CL03A474KP3NINN# |
| 21  | 0.33                | 16                  | X5R | 100nF       | ±10%                  | CL03A104KQ3NINN# |
| 22  | 0.33                | 16                  | X5R | 100nF       | ±20%                  | CL03A104MQ3NINN# |
| 23  | 0.33                | 25                  | X5R | 4.7nF       | ±10%                  | CL03A472KA3NINN# |
| 24  | 0.33                | 25                  | X5R | 10nF        | ±10%                  | CL03A103KA3NINN# |
| 25  | 0.33                | 25                  | X5R | 22nF        | ±10%                  | CL03A223KA3NINN# |
| 26  | 0.33                | 25                  | X5R | 100nF       | ±10%                  | CL03A104KA3NINN# |
| 27  | 0.33                | 25                  | X5R | 100nF       | ±20%                  | CL03A104MA3NINN# |
| 28  | 0.33                | 35                  | X5R | 100nF       | ±10%                  | CL03A104KL3NINN# |
| 29  | 0.35                | 4                   | X5R | 1uF         | ±20%                  | CL03A105MR3CSN#  |
| 30  | 0.35                | 6.3                 | X5R | 1uF         | ±10%                  | CL03A105KQ3CSN#  |
| 31  | 0.35                | 6.3                 | X5R | 1uF         | ±20%                  | CL03A105MQ3CSN#  |
| 32  | 0.35                | 6.3                 | X5R | 1uF         | ±20%                  | CL03A105MQ3ISN#  |
| 33  | 0.35                | 6.3                 | X5R | 1uF         | ±20%                  | CL03A105MQ3NSN#  |
| 34  | 0.35                | 6.3                 | X5R | 2.2uF       | ±20%                  | CL03A225MQ3CSN#  |
| 35  | 0.35                | 10                  | X5R | 1uF         | ±10%                  | CL03A105KP3NSN#  |
| 36  | 0.35                | 10                  | X5R | 1uF         | ±20%                  | CL03A105MP3ISN#  |
| 37  | 0.35                | 10                  | X5R | 1uF         | ±20%                  | CL03A105MP3NSN#  |
| 38  | 0.39                | 4                   | X5R | 3.7uF       | ±20%                  | CL03A375MR3DRN#  |
| 39  | 0.39                | 6.3                 | X5R | 1uF         | ±20%                  | CL03A105MQ3DRN#  |
| 40  | 0.39                | 6.3                 | X5R | 1.9uF       | ±20%                  | CL03A195MQ3DRN#  |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 0201/0603

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 41  | 0.39                | 6.3                 | X5R | 2.2uF       | ±20%                  | CL03A225MQ3CR6# |
| 42  | 0.39                | 6.3                 | X5R | 2.2uF       | ±20%                  | CL03A225MQ3CRN# |
| 43  | 0.39                | 6.3                 | X5R | 2.2uF       | ±20%                  | CL03A225MQ3IRN# |
| 44  | 0.39                | 6.3                 | X5R | 3uF         | ±20%                  | CL03A305MQ3CRN# |
| 45  | 0.39                | 6.3                 | X5R | 3.9uF       | ±20%                  | CL03A395MQ3CRN# |
| 46  | 0.39                | 6.3                 | X5R | 4.7uF       | ±20%                  | CL03A475MQ3CRN# |
| 47  | 0.39                | 10                  | X5R | 2.2uF       | ±10%                  | CL03A225KP3CRN# |
| 48  | 0.39                | 10                  | X5R | 2.2uF       | ±20%                  | CL03A225MP3CRN# |
| 49  | 0.39                | 10                  | X5R | 2.2uF       | ±20%                  | CL03A225MP3IRN# |
| 50  | 0.39                | 10                  | X5R | 330nF       | ±10%                  | CL03A334KP3ZRN# |
| 51  | 0.39                | 16                  | X5R | 1uF         | ±20%                  | CL03A105MO3IRN# |
| 52  | 0.39                | 16                  | X5R | 1uF         | ±20%                  | CL03A105MO3NRN# |
| 53  | 0.39                | 25                  | X5R | 220nF       | ±10%                  | CL03A224KA3NRN# |
| 54  | 0.39                | 25                  | X5R | 220nF       | ±10%                  | CL03A224KA3ZRN# |
| 55  | 0.39                | 25                  | X5R | 330nF       | ±10%                  | CL03A334KA3NRN# |
| 56  | 0.39                | 25                  | X5R | 330nF       | ±10%                  | CL03A334KA3ZRN# |
| 57  | 0.39                | 35                  | X5R | 220nF       | ±10%                  | CL03A224KL3NRN# |
| 58  | 0.55                | 4                   | X5R | 4.9uF       | ±20%                  | CL03A495MR5D65# |
| 59  | 0.55                | 6.3                 | X5R | 4.7uF       | ±20%                  | CL03A475MQ5C65# |
| 60  | 0.55                | 6.3                 | X5R | 4.7uF       | ±20%                  | CL03A475MQ5D65# |
| 61  | 0.55                | 16                  | X5R | 2.2uF       | ±20%                  | CL03A225MO5C65# |

Size Code (inch/mm) : 0402/1005

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number      |
|-----|---------------------|---------------------|-----|-------------|-----------------------|------------------|
| 1   | 0.33                | 6.3                 | X5R | 1uF         | ±10%                  | CL05A105KQ3LNN#  |
| 2   | 0.33                | 6.3                 | X5R | 2.2uF       | ±20%                  | CL05A225MQ3LRN#  |
| 3   | 0.33                | 6.3                 | X5R | 4.7uF       | ±20%                  | CL05A475MQ3JUD#  |
| 4   | 0.35                | 6.3                 | X5R | 4.7uF       | ±20%                  | CL05A475MQ3LUN#  |
| 5   | 0.50                | 6.3                 | X5R | 10uF        | ±20%                  | CL05A106MQ4N68#  |
| 6   | 0.50                | 10                  | X5R | 10uF        | ±20%                  | CL05A106MP5C64#  |
| 7   | 0.55                | 4                   | X5R | 2.2uF       | ±20%                  | CL05A225MR5NINN# |
| 8   | 0.55                | 6.3                 | X5R | 1uF         | ±10%                  | CL05A105KQ5NINN# |
| 9   | 0.55                | 6.3                 | X5R | 1uF         | ±20%                  | CL05A105MQ5NINN# |
| 10  | 0.55                | 6.3                 | X5R | 1uF         | ±5%                   | CL05A105JQ5NINN# |
| 11  | 0.55                | 6.3                 | X5R | 2.2uF       | ±10%                  | CL05A225KQ5NINN# |
| 12  | 0.55                | 6.3                 | X5R | 2.2uF       | ±20%                  | CL05A225MQ5NINN# |
| 13  | 0.55                | 6.3                 | X5R | 100nF       | ±10%                  | CL05A104KQ5NINN# |
| 14  | 0.55                | 6.3                 | X5R | 220nF       | ±10%                  | CL05A224KQ5NINN# |
| 15  | 0.55                | 6.3                 | X5R | 330nF       | ±10%                  | CL05A334KQ5NINN# |
| 16  | 0.55                | 6.3                 | X5R | 330nF       | ±20%                  | CL05A334MQ5NINN# |
| 17  | 0.55                | 6.3                 | X5R | 470nF       | ±10%                  | CL05A474KQ5NINN# |
| 18  | 0.55                | 10                  | X5R | 1uF         | ±10%                  | CL05A105KP5NFN#  |
| 19  | 0.55                | 10                  | X5R | 1uF         | ±10%                  | CL05A105KP5NINN# |
| 20  | 0.55                | 10                  | X5R | 2.2uF       | ±10%                  | CL05A225KP5NINN# |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 0402/1005

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number      |
|-----|---------------------|---------------------|-----|-------------|-----------------------|------------------|
| 21  | 0.55                | 10                  | X5R | 2.2uF       | ±20%                  | CL05A225MP5NNN#  |
| 22  | 0.55                | 10                  | X5R | 100nF       | ±10%                  | CL05A104KP5NNN#  |
| 23  | 0.55                | 10                  | X5R | 150nF       | ±10%                  | CL05A154KP5NNN#  |
| 24  | 0.55                | 10                  | X5R | 220nF       | ±10%                  | CL05A224KP5NNN#  |
| 25  | 0.55                | 10                  | X5R | 220nF       | ±20%                  | CL05A224MP5NNN#  |
| 26  | 0.55                | 10                  | X5R | 470nF       | ±10%                  | CL05A474KP5NNN#  |
| 27  | 0.55                | 16                  | X5R | 1uF         | ±10%                  | CL05A105K05NFN#  |
| 28  | 0.55                | 16                  | X5R | 1uF         | ±10%                  | CL05A105K05NNN#  |
| 29  | 0.55                | 16                  | X5R | 4.2uF       | ±10%                  | CL05A425K05LUN#  |
| 30  | 0.55                | 16                  | X5R | 4.7uF       | ±20%                  | CL05A475M05LUN#  |
| 31  | 0.55                | 16                  | X5R | 100nF       | ±10%                  | CL05A104K05NNN#  |
| 32  | 0.55                | 16                  | X5R | 100nF       | ±20%                  | CL05A104M05NNN#  |
| 33  | 0.55                | 16                  | X5R | 100nF       | ±5%                   | CL05A104J05NNN#  |
| 34  | 0.55                | 16                  | X5R | 220nF       | ±10%                  | CL05A224K05NNN#  |
| 35  | 0.55                | 16                  | X5R | 470nF       | ±10%                  | CL05A474K05NNN#  |
| 36  | 0.55                | 25                  | X5R | 1uF         | ±10%                  | CL05A105KA5NNN#  |
| 37  | 0.55                | 25                  | X5R | 2.2uF       | ±20%                  | CL05A225MA5JUN#  |
| 38  | 0.55                | 25                  | X5R | 100nF       | ±10%                  | CL05A104KA5NFN#  |
| 39  | 0.55                | 25                  | X5R | 100nF       | ±10%                  | CL05A104KA5NNN#  |
| 40  | 0.55                | 25                  | X5R | 220nF       | ±10%                  | CL05A224KA5NNN#  |
| 41  | 0.55                | 25                  | X5R | 330nF       | ±10%                  | CL05A334KA5NNN#  |
| 42  | 0.55                | 25                  | X5R | 470nF       | ±10%                  | CL05A474KA5NNN#  |
| 43  | 0.57                | 6.3                 | X5R | 2.2uF       | ±10%                  | CL05A225KQ5NSN#  |
| 44  | 0.57                | 6.3                 | X5R | 2.2uF       | ±20%                  | CL05A225MQ5NSN#  |
| 45  | 0.57                | 6.3                 | X5R | 2.2uF       | ±20%                  | CL05A225MQ5ZSN#  |
| 46  | 0.57                | 10                  | X5R | 2.2uF       | ±10%                  | CL05A225KP5NSN#  |
| 47  | 0.57                | 10                  | X5R | 2.2uF       | ±20%                  | CL05A225MP5NSN#  |
| 48  | 0.60                | 4                   | X5R | 4.7uF       | ±20%                  | CL05A475MR5NQN#  |
| 49  | 0.60                | 16                  | X5R | 2.2uF       | ±10%                  | CL05A225K05NQN#  |
| 50  | 0.60                | 16                  | X5R | 2.2uF       | ±20%                  | CL05A225M05NQN#  |
| 51  | 0.60                | 25                  | X5R | 1uF         | ±10%                  | CL05A105KA5NFQ#  |
| 52  | 0.60                | 25                  | X5R | 1uF         | ±10%                  | CL05A105KA5NQN#  |
| 53  | 0.65                | 4                   | X5R | 18uF        | ±20%                  | CL05A186MR5DRN#  |
| 54  | 0.65                | 4                   | X5R | 20uF        | ±20%                  | CL05A206MR5DRN#  |
| 55  | 0.65                | 6.3                 | X5R | 4.7uF       | ±10%                  | CL05A475KQ5NRRN# |
| 56  | 0.65                | 6.3                 | X5R | 4.7uF       | ±20%                  | CL05A475MQ5NRRN# |
| 57  | 0.65                | 6.3                 | X5R | 6uF         | ±20%                  | CL05A605MQ5DRN#  |
| 58  | 0.65                | 6.3                 | X5R | 9uF         | ±20%                  | CL05A905MQ5DRN#  |
| 59  | 0.65                | 6.3                 | X5R | 10uF        | ±20%                  | CL05A106MQ5NRRN# |
| 60  | 0.65                | 6.3                 | X5R | 15uF        | ±20%                  | CL05A156MQ5Z64#  |
| 61  | 0.65                | 10                  | X5R | 4.7uF       | ±10%                  | CL05A475KP5NRRN# |
| 62  | 0.65                | 10                  | X5R | 4.7uF       | ±20%                  | CL05A475MP5NRRN# |
| 63  | 0.65                | 10                  | X5R | 10uF        | ±20%                  | CL05A106MP5Z64#  |
| 64  | 0.65                | 35                  | X5R | 1uF         | ±10%                  | CL05A105KL5NRRN# |
| 65  | 0.70                | 4                   | X5R | 10uF        | ±20%                  | CL05A106MR5NUN#  |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 0402/1005

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 66  | 0.70                | 4                   | X5R | 22uF        | ±20%                  | CL05A226MR5QUN# |
| 67  | 0.70                | 4                   | X5R | 23uF        | ±20%                  | CL05A236MR5DUN# |
| 68  | 0.70                | 6.3                 | X5R | 10uF        | ±20%                  | CL05A106MQ5NUN# |
| 69  | 0.70                | 6.3                 | X5R | 22uF        | ±20%                  | CL05A226MQ5CUN# |
| 70  | 0.70                | 10                  | X5R | 4.7uF       | ±20%                  | CL05A475MP5NUN# |
| 71  | 0.70                | 10                  | X5R | 10uF        | ±20%                  | CL05A106MP5IUN# |
| 72  | 0.70                | 16                  | X5R | 4.7uF       | ±20%                  | CL05A475M05NUN# |
| 73  | 0.70                | 25                  | X5R | 2.2uF       | ±10%                  | CL05A225KA5NUN# |
| 74  | 0.70                | 25                  | X5R | 2.2uF       | ±20%                  | CL05A225MA5NUN# |
| 75  | 0.70                | 25                  | X5R | 4.7uF       | ±20%                  | CL05A475MA5NUN# |
| 76  | 0.70                | 35                  | X5R | 2.2uF       | ±20%                  | CL05A225ML5NUN# |
| 77  | 0.80                | 4                   | X5R | 27uF        | ±20%                  | CL05A276MR6DUN# |
| 78  | 0.80                | 10                  | X5R | 10uF        | ±20%                  | CL05A106MP68UN# |
| 79  | 0.80                | 10                  | X5R | 10uF        | ±20%                  | CL05A106MP6NUN# |
| 80  | 1.00                | 6.3                 | X5R | 10uF        | ±20%                  | CL05A106MQ5N3U# |

Size Code (inch/mm) : 0603/1608

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number      |
|-----|---------------------|---------------------|-----|-------------|-----------------------|------------------|
| 1   | 0.50                | 6.3                 | X5R | 2.2uF       | ±10%                  | CL10A225KQ5LNN#  |
| 2   | 0.50                | 6.3                 | X5R | 4.7uF       | ±10%                  | CL10A475KQ5LNN#  |
| 3   | 0.50                | 10                  | X5R | 2.2uF       | ±10%                  | CL10A225KP5LNN#  |
| 4   | 0.50                | 10                  | X5R | 4.7uF       | ±10%                  | CL10A475KP5LNN#  |
| 5   | 0.50                | 16                  | X5R | 2.2uF       | ±10%                  | CL10A225K05LNN#  |
| 6   | 0.50                | 25                  | X5R | 2.2uF       | ±10%                  | CL10A225KA5LNN#  |
| 7   | 0.65                | 16                  | X5R | 10uF        | ±20%                  | CL10A106MOAFZLN# |
| 8   | 0.65                | 25                  | X5R | 10uF        | ±20%                  | CL10A106MAAFZLN# |
| 9   | 0.65                | 25                  | X5R | 10uF        | ±20%                  | CL10A106MAAIZLN# |
| 10  | 0.65                | 35                  | X5R | 4.7uF       | ±10%                  | CL10A475KLAFZLN# |
| 11  | 0.80                | 6.3                 | X5R | 22uF        | ±20%                  | CL10A226MQ7LUN#  |
| 12  | 0.80                | 10                  | X5R | 22uF        | ±20%                  | CL10A226MP7LUN#  |
| 13  | 0.80                | 16                  | X5R | 22uF        | ±20%                  | CL10A226MO79ZLN# |
| 14  | 0.80                | 16                  | X5R | 22uF        | ±20%                  | CL10A226MO7FZLN# |
| 15  | 0.80                | 16                  | X5R | 22uF        | ±20%                  | CL10A226MO7JZLN# |
| 16  | 0.90                | 6.3                 | X5R | 1uF         | ±10%                  | CL10A105KQ8N3NN# |
| 17  | 0.90                | 6.3                 | X5R | 2.2uF       | ±10%                  | CL10A225KQ8N3N#  |
| 18  | 0.90                | 6.3                 | X5R | 2.2uF       | ±10%                  | CL10A225KQ8N3NN# |
| 19  | 0.90                | 6.3                 | X5R | 4.7uF       | ±10%                  | CL10A475KQ8N3FN# |
| 20  | 0.90                | 6.3                 | X5R | 4.7uF       | ±10%                  | CL10A475KQ8N3NN# |
| 21  | 0.90                | 6.3                 | X5R | 4.7uF       | ±20%                  | CL10A475MQ8N3NN# |
| 22  | 0.90                | 6.3                 | X5R | 10uF        | ±10%                  | CL10A106KQ8N3NN# |
| 23  | 0.90                | 6.3                 | X5R | 10uF        | ±20%                  | CL10A106MQ8N3NN# |
| 24  | 0.90                | 6.3                 | X5R | 22uF        | ±20%                  | CL10A226MQ7NRN#  |
| 25  | 0.90                | 10                  | X5R | 1uF         | ±10%                  | CL10A105KP8N3NN# |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 0603/1608

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number      |
|-----|---------------------|---------------------|-----|-------------|-----------------------|------------------|
| 26  | 0.90                | 10                  | X5R | 2.2uF       | ±10%                  | CL10A225KP8NINN# |
| 27  | 0.90                | 10                  | X5R | 2.2uF       | ±20%                  | CL10A225MP8NINN# |
| 28  | 0.90                | 10                  | X5R | 3.3uF       | ±10%                  | CL10A335KP8NFN#  |
| 29  | 0.90                | 10                  | X5R | 3.3uF       | ±10%                  | CL10A335KP8NINN# |
| 30  | 0.90                | 10                  | X5R | 4.7uF       | ±10%                  | CL10A475KP8NFN#  |
| 31  | 0.90                | 10                  | X5R | 4.7uF       | ±10%                  | CL10A475KP8NINN# |
| 32  | 0.90                | 10                  | X5R | 10uF        | ±10%                  | CL10A106KP8NFN#  |
| 33  | 0.90                | 10                  | X5R | 10uF        | ±10%                  | CL10A106KP8NINN# |
| 34  | 0.90                | 10                  | X5R | 10uF        | ±20%                  | CL10A106MP8NFN#  |
| 35  | 0.90                | 10                  | X5R | 220nF       | ±10%                  | CL10A224KP8NINN# |
| 36  | 0.90                | 16                  | X5R | 1uF         | ±10%                  | CL10A105K08NINN# |
| 37  | 0.90                | 16                  | X5R | 1uF         | ±20%                  | CL10A105M08NINN# |
| 38  | 0.90                | 16                  | X5R | 2.2uF       | ±10%                  | CL10A225K08N3N#  |
| 39  | 0.90                | 16                  | X5R | 2.2uF       | ±10%                  | CL10A225K08NFN#  |
| 40  | 0.90                | 16                  | X5R | 2.2uF       | ±10%                  | CL10A225K08NINN# |
| 41  | 0.90                | 16                  | X5R | 4.7uF       | ±10%                  | CL10A475K08NFN#  |
| 42  | 0.90                | 16                  | X5R | 4.7uF       | ±20%                  | CL10A475M08NINN# |
| 43  | 0.90                | 16                  | X5R | 470nF       | ±10%                  | CL10A474K08NINN# |
| 44  | 0.90                | 25                  | X5R | 1uF         | ±10%                  | CL10A105KA8NFN#  |
| 45  | 0.90                | 25                  | X5R | 1uF         | ±10%                  | CL10A105KA8NINN# |
| 46  | 0.90                | 25                  | X5R | 2.2uF       | ±10%                  | CL10A225KA8NINN# |
| 47  | 0.90                | 25                  | X5R | 100nF       | ±10%                  | CL10A104KA8NINN# |
| 48  | 0.90                | 25                  | X5R | 470nF       | ±10%                  | CL10A474KA8NINN# |
| 49  | 0.90                | 35                  | X5R | 1uF         | ±10%                  | CL10A105KL8NINN# |
| 50  | 0.90                | 35                  | X5R | 2.2uF       | ±10%                  | CL10A225KL8NINN# |
| 51  | 0.90                | 50                  | X5R | 1uF         | ±10%                  | CL10A105KB8NINN# |
| 52  | 0.90                | 50                  | X5R | 1uF         | ±20%                  | CL10A105MB8NINN# |
| 53  | 0.90                | 50                  | X5R | 220nF       | ±10%                  | CL10A224KB8NINN# |
| 54  | 0.90                | 50                  | X5R | 470nF       | ±10%                  | CL10A474KB8NINN# |
| 55  | 0.95                | 6.3                 | X5R | 10uF        | ±20%                  | CL10A106MQ8NQN#  |
| 56  | 0.95                | 10                  | X5R | 10uF        | ±20%                  | CL10A106MP8NFS#  |
| 57  | 0.95                | 16                  | X5R | 4.7uF       | ±10%                  | CL10A475K08NQN#  |
| 58  | 0.95                | 16                  | X5R | 10uF        | ±10%                  | CL10A106K08NQN#  |
| 59  | 0.95                | 25                  | X5R | 4.7uF       | ±10%                  | CL10A475KA8NQN#  |
| 60  | 0.95                | 25                  | X5R | 4.7uF       | ±20%                  | CL10A475MA8NQN#  |
| 61  | 1.00                | 4                   | X5R | 47uF        | ±20%                  | CL10A476MR8NRN#  |
| 62  | 1.00                | 6.3                 | X5R | 22uF        | ±10%                  | CL10A226KQ8NRN#  |
| 63  | 1.00                | 6.3                 | X5R | 22uF        | ±20%                  | CL10A226MQ8N3R#  |
| 64  | 1.00                | 6.3                 | X5R | 22uF        | ±20%                  | CL10A226MQ8NFR#  |
| 65  | 1.00                | 6.3                 | X5R | 22uF        | ±20%                  | CL10A226MQ8NRN#  |
| 66  | 1.00                | 6.3                 | X5R | 22uF        | ±20%                  | CL10A226MQ8QRN#  |
| 67  | 1.00                | 6.3                 | X5R | 47uF        | ±20%                  | CL10A476MQ8Q3R#  |
| 68  | 1.00                | 6.3                 | X5R | 47uF        | ±20%                  | CL10A476MQ8QRN#  |
| 69  | 1.00                | 10                  | X5R | 22uF        | ±20%                  | CL10A226MP8NRN#  |
| 70  | 1.00                | 25                  | X5R | 10uF        | ±20%                  | CL10A106MA8IRN#  |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 0603/1608

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 71  | 1.00                | 25                  | X5R | 10uF        | ±20%                  | CL10A106MA8NRN# |
| 72  | 1.00                | 25                  | X5R | 10uF        | ±20%                  | CL10A106MA8ZRN# |
| 73  | 1.00                | 35                  | X5R | 4.7uF       | ±10%                  | CL10A475KL8NRN# |
| 74  | 1.00                | 35                  | X5R | 10uF        | ±20%                  | CL10A106ML8NRN# |
| 75  | 1.00                | 50                  | X5R | 4.7uF       | ±10%                  | CL10A475KB86RN# |
| 76  | 1.05                | 6.3                 | X5R | 22uF        | ±20%                  | CL10A226MQ8NUN# |
| 77  | 1.05                | 10                  | X5R | 22uF        | ±20%                  | CL10A226MP8NUN# |
| 78  | 1.10                | 4                   | X5R | 47uF        | ±20%                  | CL10A476MR8NZN# |

Size Code (inch/mm) : 0805/2012

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 0.80                | 6.3                 | X5R | 47uF        | ±20%                  | CL21A476MQ7LRN# |
| 2   | 0.80                | 10                  | X5R | 10uF        | ±10%                  | CL21A106KP7LQN# |
| 3   | 0.80                | 25                  | X5R | 22uF        | ±20%                  | CL21A226MA7FUN# |
| 4   | 0.90                | 6.3                 | X5R | 47uF        | ±20%                  | CL21A476MQ8LRN# |
| 5   | 0.95                | 6.3                 | X5R | 4.7uF       | ±10%                  | CL21A475KQCLNN# |
| 6   | 0.95                | 6.3                 | X5R | 10uF        | ±10%                  | CL21A106KQCLNN# |
| 7   | 0.95                | 6.3                 | X5R | 10uF        | ±10%                  | CL21A106KQCLRN# |
| 8   | 0.95                | 6.3                 | X5R | 10uF        | ±20%                  | CL21A106MQCLNN# |
| 9   | 0.95                | 6.3                 | X5R | 22uF        | ±10%                  | CL21A226KQCLRN# |
| 10  | 0.95                | 6.3                 | X5R | 22uF        | ±20%                  | CL21A226MQCLRN# |
| 11  | 0.95                | 6.3                 | X5R | 47uF        | ±20%                  | CL21A476MQCLRN# |
| 12  | 0.95                | 10                  | X5R | 2.2uF       | ±10%                  | CL21A225KPCLNN# |
| 13  | 0.95                | 10                  | X5R | 4.7uF       | ±10%                  | CL21A475KPCLNN# |
| 14  | 0.95                | 10                  | X5R | 10uF        | ±10%                  | CL21A106KPCLQN# |
| 15  | 0.95                | 10                  | X5R | 10uF        | ±10%                  | CL21A106KPCLRN# |
| 16  | 0.95                | 10                  | X5R | 22uF        | ±10%                  | CL21A226KPCLRN# |
| 17  | 0.95                | 10                  | X5R | 22uF        | ±20%                  | CL21A226MPCLRN# |
| 18  | 0.95                | 16                  | X5R | 1uF         | ±10%                  | CL21A105KQCLNN# |
| 19  | 0.95                | 16                  | X5R | 2.2uF       | ±10%                  | CL21A225KQCLNN# |
| 20  | 0.95                | 16                  | X5R | 4.7uF       | ±10%                  | CL21A475KQCLRN# |
| 21  | 0.95                | 16                  | X5R | 10uF        | ±10%                  | CL21A106KQCL3R# |
| 22  | 0.95                | 16                  | X5R | 10uF        | ±10%                  | CL21A106KQCLRN# |
| 23  | 0.95                | 16                  | X5R | 22uF        | ±20%                  | CL21A226MOCLRN# |
| 24  | 0.95                | 25                  | X5R | 1uF         | ±10%                  | CL21A105KACLNN# |
| 25  | 0.95                | 25                  | X5R | 2.2uF       | ±10%                  | CL21A225KACLNN# |
| 26  | 0.95                | 25                  | X5R | 4.7uF       | ±10%                  | CL21A475KACLRN# |
| 27  | 0.95                | 25                  | X5R | 10uF        | ±10%                  | CL21A106KACLRN# |
| 28  | 0.95                | 35                  | X5R | 4.7uF       | ±10%                  | CL21A475KLCLQN# |
| 29  | 0.95                | 50                  | X5R | 1uF         | ±10%                  | CL21A105KBCLNN# |
| 30  | 1.00                | 6.3                 | X5R | 47uF        | ±20%                  | CL21A476MQ9LRN# |
| 31  | 1.00                | 50                  | X5R | 2.2uF       | ±10%                  | CL21A225KB9LNN# |
| 32  | 1.20                | 6.3                 | X5R | 33uF        | ±20%                  | CL21A336MQELRN# |
| 33  | 1.35                | 6.3                 | X5R | 4.7uF       | ±10%                  | CL21A475KQFNNN# |
| 34  | 1.35                | 6.3                 | X5R | 4.7uF       | ±20%                  | CL21A475MQFNNN# |
| 35  | 1.35                | 6.3                 | X5R | 10uF        | ±10%                  | CL21A106KQFNFN# |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 0805/2012

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number   |
|-----|---------------------|---------------------|-----|-------------|-----------------------|---------------|
| 36  | 1.35                | 6.3                 | X5R | 10uF        | ±10%                  | CL21A106KQFN# |
| 37  | 1.35                | 6.3                 | X5R | 10uF        | ±20%                  | CL21A106MQFN# |
| 38  | 1.35                | 10                  | X5R | 1uF         | ±10%                  | CL21A105KPF#  |
| 39  | 1.35                | 10                  | X5R | 2.2uF       | ±10%                  | CL21A225KPF#  |
| 40  | 1.35                | 10                  | X5R | 3.3uF       | ±10%                  | CL21A335KPF#  |
| 41  | 1.35                | 10                  | X5R | 4.7uF       | ±10%                  | CL21A475KPF#  |
| 42  | 1.35                | 10                  | X5R | 4.7uF       | ±20%                  | CL21A475MPF#  |
| 43  | 1.35                | 10                  | X5R | 10uF        | ±10%                  | CL21A106KPF#  |
| 44  | 1.35                | 10                  | X5R | 10uF        | ±20%                  | CL21A106MPF#  |
| 45  | 1.35                | 16                  | X5R | 2.2uF       | ±10%                  | CL21A225KOF#  |
| 46  | 1.35                | 16                  | X5R | 4.7uF       | ±10%                  | CL21A475KOF#  |
| 47  | 1.35                | 16                  | X5R | 10uF        | ±10%                  | CL21A106KOF#  |
| 48  | 1.35                | 16                  | X5R | 10uF        | ±20%                  | CL21A106MOF#  |
| 49  | 1.35                | 25                  | X5R | 2.2uF       | ±10%                  | CL21A225KAF#  |
| 50  | 1.35                | 25                  | X5R | 2.2uF       | ±10%                  | CL21A225KAF#  |
| 51  | 1.35                | 25                  | X5R | 4.7uF       | ±20%                  | CL21A475MAF#  |
| 52  | 1.35                | 25                  | X5R | 10uF        | ±10%                  | CL21A106KAF#  |
| 53  | 1.35                | 50                  | X5R | 2.2uF       | ±10%                  | CL21A225KB#   |
| 54  | 1.40                | 6.3                 | X5R | 10uF        | ±20%                  | CL21A106MQQ#  |
| 55  | 1.40                | 6.3                 | X5R | 22uF        | ±10%                  | CL21A226KQQ#  |
| 56  | 1.40                | 6.3                 | X5R | 22uF        | ±10%                  | CL21A226KQQ#  |
| 57  | 1.40                | 6.3                 | X5R | 22uF        | ±20%                  | CL21A226MQQ#  |
| 58  | 1.40                | 6.3                 | X5R | 22uF        | ±20%                  | CL21A226MQQ#  |
| 59  | 1.40                | 10                  | X5R | 22uF        | ±20%                  | CL21A226MPQ#  |
| 60  | 1.40                | 16                  | X5R | 10uF        | ±10%                  | CL21A106KQ#   |
| 61  | 1.40                | 16                  | X5R | 10uF        | ±10%                  | CL21A106KQ#   |
| 62  | 1.40                | 25                  | X5R | 4.7uF       | ±10%                  | CL21A475KAQ#  |
| 63  | 1.40                | 25                  | X5R | 4.7uF       | ±10%                  | CL21A475KAQ#  |
| 64  | 1.40                | 25                  | X5R | 4.7uF       | ±10%                  | CL21A475KAQ#  |
| 65  | 1.40                | 25                  | X5R | 4.7uF       | ±20%                  | CL21A475MAQ#  |
| 66  | 1.40                | 25                  | X5R | 22uF        | ±20%                  | CL21A226MAQ#  |
| 67  | 1.40                | 50                  | X5R | 2.2uF       | ±10%                  | CL21A225KBQ#  |
| 68  | 1.40                | 50                  | X5R | 4.7uF       | ±10%                  | CL21A475KBQ#  |
| 69  | 1.45                | 4                   | X5R | 47uF        | ±20%                  | CL21A476MRY#  |
| 70  | 1.45                | 4                   | X5R | 100uF       | ±20%                  | CL21A107MRY#  |
| 71  | 1.45                | 6.3                 | X5R | 47uF        | ±20%                  | CL21A476MQY#  |
| 72  | 1.45                | 6.3                 | X5R | 47uF        | ±20%                  | CL21A476MQY#  |
| 73  | 1.45                | 16                  | X5R | 22uF        | ±20%                  | CL21A226MOY#  |
| 74  | 1.45                | 25                  | X5R | 10uF        | ±10%                  | CL21A106KAY#  |
| 75  | 1.45                | 25                  | X5R | 10uF        | ±10%                  | CL21A106KAY#  |
| 76  | 1.45                | 25                  | X5R | 10uF        | ±10%                  | CL21A106KAY#  |
| 77  | 1.45                | 25                  | X5R | 10uF        | ±20%                  | CL21A106MAY#  |
| 78  | 1.45                | 25                  | X5R | 22uF        | ±20%                  | CL21A226MAY#  |
| 79  | 1.45                | 50                  | X5R | 10uF        | ±10%                  | CL21A106KBY#  |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 1206/3216

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number      |
|-----|---------------------|---------------------|-----|-------------|-----------------------|------------------|
| 1   | 0.95                | 16                  | X5R | 3.3uF       | ±10%                  | CL31A335KOC LNN# |
| 2   | 0.95                | 16                  | X5R | 4.7uF       | ±10%                  | CL31A475KOC LNN# |
| 3   | 0.95                | 16                  | X5R | 10uF        | ±10%                  | CL31A106KOC LNN# |
| 4   | 0.95                | 16                  | X5R | 22uF        | ±10%                  | CL31A226KOC LFN# |
| 5   | 0.95                | 16                  | X5R | 22uF        | ±10%                  | CL31A226KOC LNN# |
| 6   | 0.95                | 16                  | X5R | 22uF        | ±20%                  | CL31A226MOC LFN# |
| 7   | 0.95                | 16                  | X5R | 22uF        | ±20%                  | CL31A226MOC LNN# |
| 8   | 0.95                | 25                  | X5R | 4.7uF       | ±10%                  | CL31A475KAC LNN# |
| 9   | 0.95                | 25                  | X5R | 10uF        | ±10%                  | CL31A106KAC LNN# |
| 10  | 1.00                | 35                  | X5R | 4.7uF       | ±10%                  | CL31A475KL9 LNN# |
| 11  | 1.00                | 50                  | X5R | 1uF         | ±10%                  | CL31A105KB9 LNN# |
| 12  | 1.00                | 50                  | X5R | 2.2uF       | ±10%                  | CL31A225KB9 LNN# |
| 13  | 1.00                | 50                  | X5R | 4.7uF       | ±10%                  | CL31A475KB9 LNN# |
| 14  | 1.00                | 100                 | X5R | 2.2uF       | ±10%                  | CL31A225KC9 LNN# |
| 15  | 1.25                | 10                  | X5R | 10uF        | ±10%                  | CL31A106KP LNN#  |
| 16  | 1.80                | 6.3                 | X5R | 10uF        | ±10%                  | CL31A106KQH NNN# |
| 17  | 1.80                | 6.3                 | X5R | 10uF        | ±20%                  | CL31A106MQH NNN# |
| 18  | 1.80                | 6.3                 | X5R | 22uF        | ±10%                  | CL31A226KQH NNN# |
| 19  | 1.80                | 6.3                 | X5R | 22uF        | ±20%                  | CL31A226MQH NNN# |
| 20  | 1.80                | 6.3                 | X5R | 47uF        | ±10%                  | CL31A476KQH NNN# |
| 21  | 1.80                | 6.3                 | X5R | 47uF        | ±20%                  | CL31A476MQH NNN# |
| 22  | 1.80                | 6.3                 | X5R | 100uF       | ±20%                  | CL31A107MQH NNN# |
| 23  | 1.80                | 10                  | X5R | 10uF        | ±10%                  | CL31A106KPH NNN# |
| 24  | 1.80                | 10                  | X5R | 22uF        | ±10%                  | CL31A226KPH NNN# |
| 25  | 1.80                | 10                  | X5R | 22uF        | ±20%                  | CL31A226MPH NNN# |
| 26  | 1.80                | 10                  | X5R | 47uF        | ±20%                  | CL31A476MPH NFN# |
| 27  | 1.80                | 10                  | X5R | 47uF        | ±20%                  | CL31A476MPH NNN# |
| 28  | 1.80                | 16                  | X5R | 2.2uF       | ±10%                  | CL31A225KOH NNN# |
| 29  | 1.80                | 16                  | X5R | 3.3uF       | ±10%                  | CL31A335KOH NNN# |
| 30  | 1.80                | 16                  | X5R | 4.7uF       | ±10%                  | CL31A475KOH NNN# |
| 31  | 1.80                | 16                  | X5R | 4.7uF       | ±20%                  | CL31A475MOH NNN# |
| 32  | 1.80                | 16                  | X5R | 10uF        | ±10%                  | CL31A106KOH NNN# |
| 33  | 1.80                | 16                  | X5R | 10uF        | ±20%                  | CL31A106MOH NNN# |
| 34  | 1.80                | 16                  | X5R | 22uF        | ±10%                  | CL31A226KOH NFN# |
| 35  | 1.80                | 16                  | X5R | 22uF        | ±10%                  | CL31A226KOH NNN# |
| 36  | 1.80                | 16                  | X5R | 22uF        | ±20%                  | CL31A226MOH NNN# |
| 37  | 1.80                | 25                  | X5R | 3.3uF       | ±10%                  | CL31A335KAH NNN# |
| 38  | 1.80                | 25                  | X5R | 4.7uF       | ±10%                  | CL31A475KAH NNN# |
| 39  | 1.80                | 25                  | X5R | 10uF        | ±10%                  | CL31A106KAH NFN# |
| 40  | 1.80                | 25                  | X5R | 10uF        | ±10%                  | CL31A106KAH NNN# |
| 41  | 1.80                | 25                  | X5R | 10uF        | ±20%                  | CL31A106MAH NNN# |
| 42  | 1.80                | 25                  | X5R | 22uF        | ±10%                  | CL31A226KAH NNN# |
| 43  | 1.80                | 25                  | X5R | 22uF        | ±20%                  | CL31A226MAH NNN# |
| 44  | 1.80                | 50                  | X5R | 4.7uF       | ±10%                  | CL31A475KBH NNN# |
| 45  | 1.80                | 50                  | X5R | 10uF        | ±10%                  | CL31A106KBH NNN# |
| 46  | 1.80                | 50                  | X5R | 10uF        | ±20%                  | CL31A106MBH NNN# |
| 47  | 1.90                | 6.3                 | X5R | 100uF       | ±20%                  | CL31A107MQK NNN# |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 1210/3225

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 0.95                | 16                  | X5R | 10uF        | ±10%                  | CL32A106KOCLNN# |
| 2   | 0.95                | 16                  | X5R | 22uF        | ±20%                  | CL32A226MOCLNN# |
| 3   | 1.70                | 16                  | X5R | 22uF        | ±10%                  | CL32A226KOTFNN# |
| 4   | 1.70                | 16                  | X5R | 22uF        | ±20%                  | CL32A226MOTLNN# |
| 5   | 1.70                | 25                  | X5R | 10uF        | ±10%                  | CL32A106KATLNN# |
| 6   | 2.00                | 25                  | X5R | 10uF        | ±10%                  | CL32A106KAULNN# |
| 7   | 2.00                | 35                  | X5R | 4.7uF       | ±10%                  | CL32A475KLULNN# |
| 8   | 2.00                | 35                  | X5R | 10uF        | ±10%                  | CL32A106KLULNN# |
| 9   | 2.20                | 10                  | X5R | 10uF        | ±10%                  | CL32A106KPINNN# |
| 10  | 2.70                | 6.3                 | X5R | 22uF        | ±10%                  | CL32A226KQJNNN# |
| 11  | 2.70                | 6.3                 | X5R | 22uF        | ±20%                  | CL32A226MQJNNN# |
| 12  | 2.70                | 6.3                 | X5R | 47uF        | ±10%                  | CL32A476KQJNNN# |
| 13  | 2.70                | 6.3                 | X5R | 47uF        | ±20%                  | CL32A476MQJNNN# |
| 14  | 2.70                | 10                  | X5R | 22uF        | ±10%                  | CL32A226KPJNNN# |
| 15  | 2.70                | 10                  | X5R | 22uF        | ±20%                  | CL32A226MPJNNN# |
| 16  | 2.70                | 10                  | X5R | 47uF        | ±10%                  | CL32A476KPJNNN# |
| 17  | 2.70                | 16                  | X5R | 10uF        | ±10%                  | CL32A106KOJNNN# |
| 18  | 2.70                | 16                  | X5R | 10uF        | ±20%                  | CL32A106MOJNNN# |
| 19  | 2.70                | 16                  | X5R | 22uF        | ±10%                  | CL32A226KOJNFN# |
| 20  | 2.70                | 16                  | X5R | 22uF        | ±10%                  | CL32A226KOJNNN# |
| 21  | 2.70                | 16                  | X5R | 22uF        | ±20%                  | CL32A226MOJNNN# |
| 22  | 2.70                | 16                  | X5R | 47uF        | ±10%                  | CL32A476KOJNNN# |
| 23  | 2.70                | 16                  | X5R | 47uF        | ±20%                  | CL32A476MOJNNN# |
| 24  | 2.70                | 25                  | X5R | 10uF        | ±10%                  | CL32A106KAJNNN# |
| 25  | 2.70                | 25                  | X5R | 22uF        | ±10%                  | CL32A226KAJNFN# |
| 26  | 2.70                | 25                  | X5R | 22uF        | ±10%                  | CL32A226KAJNNN# |
| 27  | 2.70                | 25                  | X5R | 22uF        | ±20%                  | CL32A226MAJNNN# |
| 28  | 2.70                | 50                  | X5R | 10uF        | ±10%                  | CL32A106KBJNNN# |
| 29  | 2.70                | 50                  | X5R | 10uF        | ±20%                  | CL32A106MBJNNN# |
| 30  | 2.80                | 6.3                 | X5R | 100uF       | ±20%                  | CL32A107MQVNNN# |
| 31  | 2.80                | 6.3                 | X5R | 150uF       | ±20%                  | CL32A157MQVNNN# |
| 32  | 2.80                | 6.3                 | X5R | 220uF       | ±20%                  | CL32A227MQVNNN# |
| 33  | 2.80                | 10                  | X5R | 100uF       | ±20%                  | CL32A107MPVNNN# |



# Normal Capacitors\_Standard

## Product Lineup (X6S)

Size Code (inch/mm) : 01005/0402

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 0.22                | 4                   | X6S | 100nF       | ±20%                  | CL02X104MR2NHN# |
| 2   | 0.22                | 4                   | X6S | 470nF       | ±20%                  | CL02X474MR2NHN# |
| 3   | 0.22                | 6.3                 | X6S | 10nF        | ±10%                  | CL02X103KQ2NHN# |

Size Code (inch/mm) : 0201/0603

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 0.22                | 4                   | X6S | 1uF         | ±20%                  | CL03X105MR2LRN# |
| 2   | 0.33                | 6.3                 | X6S | 100nF       | ±10%                  | CL03X104KQ3NHN# |
| 3   | 0.33                | 6.3                 | X6S | 220nF       | ±10%                  | CL03X224KQ3NHN# |
| 4   | 0.33                | 6.3                 | X6S | 220nF       | ±20%                  | CL03X224MQ3NHN# |
| 5   | 0.33                | 6.3                 | X6S | 470nF       | ±10%                  | CL03X474KQ3NHN# |
| 6   | 0.33                | 25                  | X6S | 100nF       | ±10%                  | CL03X104KA3NHN# |
| 7   | 0.35                | 4                   | X6S | 1uF         | ±20%                  | CL03X105MR3CSN# |
| 8   | 0.39                | 2.5                 | X6S | 2.2uF       | ±20%                  | CL03X225MS3NRN# |
| 9   | 0.39                | 4                   | X6S | 1uF         | ±20%                  | CL03X105MR3NRN# |
| 10  | 0.39                | 4                   | X6S | 2.2uF       | ±20%                  | CL03X225MR3NRN# |

Size Code (inch/mm) : 0402/1005

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 0.33                | 10                  | X6S | 1uF         | ±20%                  | CL05X105MP3JQN# |
| 2   | 0.55                | 6.3                 | X6S | 1uF         | ±10%                  | CL05X105KQ5NFN# |
| 3   | 0.55                | 6.3                 | X6S | 1uF         | ±10%                  | CL05X105KQ5NHN# |
| 4   | 0.55                | 10                  | X6S | 1uF         | ±10%                  | CL05X105KP5NHN# |
| 5   | 0.57                | 2.5                 | X6S | 2.2uF       | ±20%                  | CL05X225MS5NSN# |
| 6   | 0.57                | 6.3                 | X6S | 2.2uF       | ±20%                  | CL05X225MQ5NSN# |
| 7   | 0.60                | 25                  | X6S | 1uF         | ±10%                  | CL05X105KA5NQN# |
| 8   | 0.70                | 4                   | X6S | 4.7uF       | ±20%                  | CL05X475MR5NUN# |
| 9   | 0.70                | 6.3                 | X6S | 4.7uF       | ±20%                  | CL05X475MQ5NUN# |
| 10  | 0.70                | 6.3                 | X6S | 10uF        | ±20%                  | CL05X106MQ5IUN# |
| 11  | 0.70                | 25                  | X6S | 2.2uF       | ±20%                  | CL05X225MA5NUN# |
| 12  | 0.80                | 4                   | X6S | 22uF        | ±20%                  | CL05X226MR6NUN# |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 0603/1608

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number      |
|-----|---------------------|---------------------|-----|-------------|-----------------------|------------------|
| 1   | 0.90                | 4                   | X6S | 10uF        | ±10%                  | CL10X106KR8NINN# |
| 2   | 0.90                | 6.3                 | X6S | 4.7uF       | ±10%                  | CL10X475KQ8NINN# |
| 3   | 0.90                | 6.3                 | X6S | 4.7uF       | ±20%                  | CL10X475MQ8NINN# |
| 4   | 0.90                | 6.3                 | X6S | 10uF        | ±20%                  | CL10X106MQ8NINN# |
| 5   | 0.90                | 10                  | X6S | 2.2uF       | ±10%                  | CL10X225KP8NINN# |
| 6   | 0.90                | 16                  | X6S | 1uF         | ±10%                  | CL10X105KQ8NINN# |
| 7   | 0.90                | 50                  | X6S | 1uF         | ±10%                  | CL10X105KB8NINN# |
| 8   | 0.95                | 16                  | X6S | 4.7uF       | ±10%                  | CL10X475KQ8NFQ#  |
| 9   | 0.95                | 16                  | X6S | 4.7uF       | ±10%                  | CL10X475KQ8NQN#  |
| 10  | 1.00                | 4                   | X6S | 22uF        | ±20%                  | CL10X226MR8QRN#  |
| 11  | 1.00                | 6.3                 | X6S | 22uF        | ±20%                  | CL10X226MQ8QRN#  |
| 12  | 1.00                | 10                  | X6S | 10uF        | ±20%                  | CL10X106MP8NFR#  |
| 13  | 1.00                | 10                  | X6S | 10uF        | ±20%                  | CL10X106MP8NRN#  |
| 14  | 1.00                | 16                  | X6S | 4.7uF       | ±10%                  | CL10X475KQ8NRN#  |
| 15  | 1.00                | 16                  | X6S | 10uF        | ±20%                  | CL10X106M08NRN#  |
| 16  | 1.00                | 25                  | X6S | 4.7uF       | ±10%                  | CL10X475KA8NRN#  |
| 17  | 1.00                | 35                  | X6S | 2.2uF       | ±10%                  | CL10X225KL8NRN#  |
| 18  | 1.05                | 4                   | X6S | 22uF        | ±20%                  | CL10X226MR8NUN#  |

Size Code (inch/mm) : 0805/2012

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number      |
|-----|---------------------|---------------------|-----|-------------|-----------------------|------------------|
| 1   | 0.95                | 2.5                 | X6S | 22uF        | ±20%                  | CL21X226MSCLRN#  |
| 2   | 0.95                | 6.3                 | X6S | 10uF        | ±10%                  | CL21X106KQCLRN#  |
| 3   | 0.95                | 10                  | X6S | 10uF        | ±10%                  | CL21X106KPCLRN#  |
| 4   | 1.35                | 4                   | X6S | 10uF        | ±20%                  | CL21X106MRFNINN# |
| 5   | 1.35                | 16                  | X6S | 2.2uF       | ±10%                  | CL21X225KOFNINN# |
| 6   | 1.40                | 4                   | X6S | 22uF        | ±20%                  | CL21X226MRQNFN#  |
| 7   | 1.40                | 4                   | X6S | 22uF        | ±20%                  | CL21X226MRQNNN#  |
| 8   | 1.40                | 6.3                 | X6S | 10uF        | ±10%                  | CL21X106KQQNNN#  |
| 9   | 1.40                | 6.3                 | X6S | 22uF        | ±20%                  | CL21X226MQQNFN#  |
| 10  | 1.40                | 6.3                 | X6S | 22uF        | ±20%                  | CL21X226MQQNNN#  |
| 11  | 1.40                | 16                  | X6S | 10uF        | ±10%                  | CL21X106KQQNNN#  |
| 12  | 1.40                | 16                  | X6S | 10uF        | ±20%                  | CL21X106MQQNNN#  |
| 13  | 1.40                | 25                  | X6S | 4.7uF       | ±10%                  | CL21X475KAQNNN#  |
| 14  | 1.45                | 4                   | X6S | 22uF        | ±20%                  | CL21X226MRYNINN# |
| 15  | 1.45                | 4                   | X6S | 47uF        | ±20%                  | CL21X476MRYNINN# |
| 16  | 1.45                | 10                  | X6S | 10uF        | ±10%                  | CL21X106KPYNINN# |
| 17  | 1.45                | 25                  | X6S | 10uF        | ±10%                  | CL21X106KAYNINN# |
| 18  | 1.45                | 25                  | X6S | 10uF        | ±10%                  | CL21X106KAYQNN#  |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 1206/3216

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 1.80                | 4                   | X6S | 47uF        | ±20%                  | CL31X476MRHNNN# |
| 2   | 1.80                | 6.3                 | X6S | 22uF        | ±10%                  | CL31X226KQHNNN# |
| 3   | 1.80                | 6.3                 | X6S | 47uF        | ±10%                  | CL31X476KQHNNN# |
| 4   | 1.80                | 6.3                 | X6S | 47uF        | ±20%                  | CL31X476MQHNFN# |
| 5   | 1.80                | 10                  | X6S | 22uF        | ±10%                  | CL31X226KPHN3N# |
| 6   | 1.80                | 16                  | X6S | 22uF        | ±10%                  | CL31X226KOHN3N# |
| 7   | 1.80                | 16                  | X6S | 22uF        | ±10%                  | CL31X226KOHNNN# |
| 8   | 1.80                | 25                  | X6S | 10uF        | ±10%                  | CL31X106KAHNNN# |
| 9   | 1.80                | 25                  | X6S | 22uF        | ±10%                  | CL31X226KAHN3N# |
| 10  | 1.80                | 25                  | X6S | 22uF        | ±10%                  | CL31X226KAHNF3# |

Size Code (inch/mm) : 1210/3225

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 2.70                | 10                  | X6S | 47uF        | ±10%                  | CL32X476KPJNNN# |
| 2   | 2.80                | 6.3                 | X6S | 100uF       | ±20%                  | CL32X107MQVNNN# |

## Product Lineup (X6T)

Size Code (inch/mm) : 01005/0402

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 0.22                | 4                   | X6T | 470nF       | ±20%                  | CL02W474MR2NNN# |

Size Code (inch/mm) : 0201/0603

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 0.39                | 4                   | X6T | 2.2uF       | ±20%                  | CL03W225MR3CRN# |

Size Code (inch/mm) : 0402/1005

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 0.22                | 2.5                 | X6T | 2.2uF       | ±20%                  | CL05W225MS2LUN# |
| 2   | 0.70                | 2.5                 | X6T | 20uF        | ±20%                  | CL05W206MS5CUN# |



# Normal Capacitors\_Standard

## Product Lineup (Y5V)

Size Code (inch/mm) : 0402/1005

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number      |
|-----|---------------------|---------------------|-----|-------------|-----------------------|------------------|
| 1   | 0.55                | 6.3                 | Y5V | 1uF         | -20/+80%              | CL05F105ZQ5NINN# |
| 2   | 0.55                | 10                  | Y5V | 330nF       | -20/+80%              | CL05F334ZP5NINN# |
| 3   | 0.55                | 10                  | Y5V | 470nF       | -20/+80%              | CL05F474ZP5NINN# |
| 4   | 0.55                | 16                  | Y5V | 22nF        | -20/+80%              | CL05F223ZO5NINN# |
| 5   | 0.55                | 16                  | Y5V | 33nF        | -20/+80%              | CL05F333ZO5NINN# |
| 6   | 0.55                | 16                  | Y5V | 47nF        | -20/+80%              | CL05F473ZO5NINN# |
| 7   | 0.55                | 16                  | Y5V | 100nF       | -20/+80%              | CL05F104ZO5NINN# |
| 8   | 0.55                | 25                  | Y5V | 22nF        | -20/+80%              | CL05F223ZA5NINN# |
| 9   | 0.55                | 25                  | Y5V | 33nF        | -20/+80%              | CL05F333ZA5NINN# |
| 10  | 0.55                | 50                  | Y5V | 15nF        | -20/+80%              | CL05F153ZB5NINN# |

Size Code (inch/mm) : 0603/1608

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number      |
|-----|---------------------|---------------------|-----|-------------|-----------------------|------------------|
| 1   | 0.90                | 6.3                 | Y5V | 2.2uF       | -20/+80%              | CL10F225ZQ8NINN# |
| 2   | 0.90                | 10                  | Y5V | 2.2uF       | -20/+80%              | CL10F225ZP8NINN# |
| 3   | 0.90                | 16                  | Y5V | 100nF       | -20/+80%              | CL10F104ZO8NINN# |
| 4   | 0.90                | 16                  | Y5V | 330nF       | -20/+80%              | CL10F334ZO8NINN# |
| 5   | 0.90                | 25                  | Y5V | 100nF       | -20/+80%              | CL10F104ZA8NINN# |
| 6   | 0.90                | 25                  | Y5V | 150nF       | -20/+80%              | CL10F154ZA8NINN# |
| 7   | 0.90                | 25                  | Y5V | 330nF       | -20/+80%              | CL10F334ZA8NINN# |
| 8   | 0.90                | 25                  | Y5V | 470nF       | -20/+80%              | CL10F474ZA8NINN# |
| 9   | 0.90                | 50                  | Y5V | 10nF        | -20/+80%              | CL10F103ZB8NINN# |
| 10  | 0.90                | 50                  | Y5V | 22nF        | -20/+80%              | CL10F223ZB8NINN# |
| 11  | 0.90                | 50                  | Y5V | 33nF        | -20/+80%              | CL10F333ZB8NINN# |
| 12  | 0.90                | 50                  | Y5V | 39nF        | -20/+80%              | CL10F393ZB8NINN# |
| 13  | 0.90                | 50                  | Y5V | 68nF        | -20/+80%              | CL10F683ZB8NINN# |
| 14  | 0.90                | 50                  | Y5V | 100nF       | -20/+80%              | CL10F104ZB8NINN# |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 0805/2012

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 0.75                | 16                  | Y5V | 680nF       | -20/+80%              | CL21F684ZOANNN# |
| 2   | 0.75                | 25                  | Y5V | 100nF       | -20/+80%              | CL21F104ZAANNN# |
| 3   | 0.75                | 25                  | Y5V | 220nF       | -20/+80%              | CL21F224ZAANNN# |
| 4   | 0.75                | 50                  | Y5V | 10nF        | -20/+80%              | CL21F103ZBANNN# |
| 5   | 0.75                | 50                  | Y5V | 22nF        | -20/+80%              | CL21F223ZBANNN# |
| 6   | 0.75                | 50                  | Y5V | 47nF        | -20/+80%              | CL21F473ZBANNN# |
| 7   | 0.75                | 50                  | Y5V | 100nF       | -20/+80%              | CL21F104ZBANNN# |
| 8   | 0.95                | 25                  | Y5V | 330nF       | -20/+80%              | CL21F334ZACNNN# |
| 9   | 0.95                | 25                  | Y5V | 470nF       | -20/+80%              | CL21F474ZACNNN# |
| 10  | 0.95                | 50                  | Y5V | 100nF       | ±20%                  | CL21F104MBCNNN# |
| 11  | 0.95                | 50                  | Y5V | 150nF       | -20/+80%              | CL21F154ZBCNNN# |
| 12  | 0.95                | 50                  | Y5V | 220nF       | -20/+80%              | CL21F224ZBCNNN# |
| 13  | 1.35                | 6.3                 | Y5V | 10uF        | -20/+80%              | CL21F106ZQFNNN# |
| 14  | 1.35                | 10                  | Y5V | 2.2uF       | -20/+80%              | CL21F225ZPFNNN# |
| 15  | 1.35                | 10                  | Y5V | 3.3uF       | -20/+80%              | CL21F335ZPFNNN# |
| 16  | 1.35                | 10                  | Y5V | 4.7uF       | -20/+80%              | CL21F475ZPFNNN# |
| 17  | 1.35                | 16                  | Y5V | 2.2uF       | -20/+80%              | CL21F225ZOFNNN# |
| 18  | 1.35                | 50                  | Y5V | 1uF         | -20/+80%              | CL21F105ZBFNNN# |
| 19  | 1.35                | 50                  | Y5V | 330nF       | -20/+80%              | CL21F334ZBFNNN# |

Size Code (inch/mm) : 1206/3216

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 1.00                | 16                  | Y5V | 1uF         | -20/+80%              | CL31F105ZOCNNN# |
| 2   | 1.00                | 16                  | Y5V | 2.2uF       | -20/+80%              | CL31F225ZOCNNN# |
| 3   | 1.00                | 25                  | Y5V | 1uF         | -20/+80%              | CL31F105ZACNNN# |
| 4   | 1.00                | 50                  | Y5V | 100nF       | -20/+80%              | CL31F104ZBCNNN# |
| 5   | 1.00                | 50                  | Y5V | 220nF       | -20/+80%              | CL31F224ZBCNNN# |
| 6   | 1.00                | 50                  | Y5V | 330nF       | -20/+80%              | CL31F334ZBCNNN# |
| 7   | 1.00                | 50                  | Y5V | 470nF       | -20/+80%              | CL31F474ZBCNNN# |
| 8   | 1.40                | 10                  | Y5V | 10uF        | -20/+80%              | CL31F106ZPFNNN# |
| 9   | 1.40                | 16                  | Y5V | 3.3uF       | -20/+80%              | CL31F335ZOFNNN# |
| 10  | 1.40                | 16                  | Y5V | 4.7uF       | -20/+80%              | CL31F475ZOFNNN# |
| 11  | 1.40                | 25                  | Y5V | 2.2uF       | -20/+80%              | CL31F225ZAFNNN# |
| 12  | 1.40                | 50                  | Y5V | 1uF         | -20/+80%              | CL31F105ZBFNNN# |
| 13  | 1.80                | 10                  | Y5V | 10uF        | -20/+80%              | CL31F106ZPHNNN# |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 1210/3225

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 1.45                | 50                  | Y5V | 1uF         | -20/+80%              | CL32F105ZBFNNN# |
| 2   | 1.50                | 25                  | Y5V | 10uF        | -20/+80%              | CL32F106ZASLNN# |
| 3   | 1.60                | 35                  | Y5V | 10uF        | -20/+80%              | CL32F106ZLGNNN# |
| 4   | 1.80                | 16                  | Y5V | 10uF        | -20/+80%              | CL32F106ZOHNNN# |
| 5   | 1.80                | 25                  | Y5V | 10uF        | -20/+80%              | CL32F106ZAHNNN# |
| 6   | 1.80                | 35                  | Y5V | 10uF        | -20/+80%              | CL32F106ZLHNNN# |

## Product Lineup (X7R)

Size Code (inch/mm) : 01005/0402

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 0.22                | 10                  | X7R | 1nF         | ±10%                  | CL02B102KP2NNN# |
| 2   | 0.22                | 10                  | X7R | 100pF       | ±10%                  | CL02B101KP2NNN# |
| 3   | 0.22                | 10                  | X7R | 120pF       | ±10%                  | CL02B121KP2NNN# |
| 4   | 0.22                | 10                  | X7R | 220pF       | ±10%                  | CL02B221KP2NNN# |
| 5   | 0.22                | 10                  | X7R | 470pF       | ±10%                  | CL02B471KP2NNN# |
| 6   | 0.22                | 16                  | X7R | 330pF       | ±10%                  | CL02B331K02NNN# |

Size Code (inch/mm) : 0201/0603

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 0.33                | 6.3                 | X7R | 4.7nF       | ±10%                  | CL03B472KQ3NNN# |
| 2   | 0.33                | 6.3                 | X7R | 10nF        | ±10%                  | CL03B103KQ3NNN# |
| 3   | 0.33                | 10                  | X7R | 1.5nF       | ±10%                  | CL03B152KP3NNN# |
| 4   | 0.33                | 10                  | X7R | 3.3nF       | ±10%                  | CL03B332KP3NNN# |
| 5   | 0.33                | 10                  | X7R | 6.8nF       | ±10%                  | CL03B682KP3NNN# |
| 6   | 0.33                | 10                  | X7R | 10nF        | ±10%                  | CL03B103KP3NNN# |
| 7   | 0.33                | 16                  | X7R | 1nF         | ±10%                  | CL03B102K03NNN# |
| 8   | 0.33                | 16                  | X7R | 10nF        | ±10%                  | CL03B103K03NNN# |
| 9   | 0.33                | 16                  | X7R | 150pF       | ±10%                  | CL03B151K03NNN# |
| 10  | 0.33                | 16                  | X7R | 220pF       | ±10%                  | CL03B221K03NNN# |
| 11  | 0.33                | 16                  | X7R | 270pF       | ±10%                  | CL03B271K03NNN# |
| 12  | 0.33                | 16                  | X7R | 470pF       | ±10%                  | CL03B471K03NNN# |
| 13  | 0.33                | 16                  | X7R | 560pF       | ±10%                  | CL03B561K03NNN# |
| 14  | 0.33                | 16                  | X7R | 820pF       | ±10%                  | CL03B821K03NNN# |
| 15  | 0.33                | 25                  | X7R | 1nF         | ±10%                  | CL03B102KA3NNN# |
| 16  | 0.33                | 25                  | X7R | 1nF         | ±5%                   | CL03B102JA3NNN# |
| 17  | 0.33                | 25                  | X7R | 150pF       | ±10%                  | CL03B151KA3NNN# |
| 18  | 0.33                | 25                  | X7R | 220pF       | ±10%                  | CL03B221KA3NNN# |
| 19  | 0.33                | 25                  | X7R | 330pF       | ±10%                  | CL03B331KA3NNN# |
| 18  | 0.33                | 25                  | X7R | 470pF       | ±10%                  | CL03B471KA3NNN# |
| 21  | 0.33                | 25                  | X7R | 680pF       | ±10%                  | CL03B681KA3NNN# |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 0402/1005

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number      |
|-----|---------------------|---------------------|-----|-------------|-----------------------|------------------|
| 1   | 0.33                | 16                  | X7R | 100nF       | ±10%                  | CL05B104K03LNN#  |
| 2   | 0.55                | 6.3                 | X7R | 100nF       | ±10%                  | CL05B104KQ5NINN# |
| 3   | 0.55                | 6.3                 | X7R | 470nF       | ±10%                  | CL05B474KQ5NINN# |
| 4   | 0.55                | 10                  | X7R | 22nF        | ±10%                  | CL05B223KP5NINN# |
| 5   | 0.55                | 10                  | X7R | 27nF        | ±10%                  | CL05B273KP5NINN# |
| 6   | 0.55                | 10                  | X7R | 47nF        | ±10%                  | CL05B473KP5NINN# |
| 7   | 0.55                | 10                  | X7R | 68nF        | ±10%                  | CL05B683KP5NINN# |
| 8   | 0.55                | 10                  | X7R | 82nF        | ±10%                  | CL05B823KP5NINN# |
| 9   | 0.55                | 10                  | X7R | 100nF       | ±10%                  | CL05B104KP5NFN#  |
| 10  | 0.55                | 10                  | X7R | 100nF       | ±10%                  | CL05B104KP5NINN# |
| 11  | 0.55                | 10                  | X7R | 100nF       | ±20%                  | CL05B104MP5NINN# |
| 12  | 0.55                | 10                  | X7R | 220nF       | ±10%                  | CL05B224KP5NINN# |
| 13  | 0.55                | 10                  | X7R | 470nF       | ±10%                  | CL05B474KP5NINN# |
| 14  | 0.55                | 16                  | X7R | 8.2nF       | ±10%                  | CL05B822K05NINN# |
| 15  | 0.55                | 16                  | X7R | 10nF        | ±10%                  | CL05B103K05NCN#  |
| 16  | 0.55                | 16                  | X7R | 10nF        | ±10%                  | CL05B103K05NFN#  |
| 17  | 0.55                | 16                  | X7R | 10nF        | ±10%                  | CL05B103K05NINN# |
| 18  | 0.55                | 16                  | X7R | 10nF        | ±5%                   | CL05B103J05NINN# |
| 19  | 0.55                | 16                  | X7R | 22nF        | ±10%                  | CL05B223K05NFN#  |
| 20  | 0.55                | 16                  | X7R | 22nF        | ±10%                  | CL05B223K05NINN# |
| 21  | 0.55                | 16                  | X7R | 22nF        | ±5%                   | CL05B223J05NINN# |
| 22  | 0.55                | 16                  | X7R | 27nF        | ±10%                  | CL05B273K05NINN# |
| 23  | 0.55                | 16                  | X7R | 33nF        | ±10%                  | CL05B333K05NFN#  |
| 24  | 0.55                | 16                  | X7R | 33nF        | ±10%                  | CL05B333K05NINN# |
| 25  | 0.55                | 16                  | X7R | 33nF        | ±5%                   | CL05B333J05NINN# |
| 26  | 0.55                | 16                  | X7R | 47nF        | ±10%                  | CL05B473K05NFN#  |
| 27  | 0.55                | 16                  | X7R | 47nF        | ±10%                  | CL05B473K05NINN# |
| 28  | 0.55                | 16                  | X7R | 47nF        | ±5%                   | CL05B473J05NINN# |
| 29  | 0.55                | 16                  | X7R | 68nF        | ±10%                  | CL05B683K05NINN# |
| 30  | 0.55                | 16                  | X7R | 100nF       | ±10%                  | CL05B104K05NFN#  |
| 31  | 0.55                | 16                  | X7R | 100nF       | ±10%                  | CL05B104K05NINN# |
| 32  | 0.55                | 16                  | X7R | 100nF       | ±20%                  | CL05B104M05NINN# |
| 33  | 0.55                | 16                  | X7R | 100nF       | ±5%                   | CL05B104J05NINN# |
| 34  | 0.55                | 16                  | X7R | 220nF       | ±10%                  | CL05B224K05NFN#  |
| 35  | 0.55                | 16                  | X7R | 220nF       | ±10%                  | CL05B224K05NINN# |
| 36  | 0.55                | 16                  | X7R | 820pF       | ±10%                  | CL05B821K05NINN# |
| 37  | 0.55                | 25                  | X7R | 1.5nF       | ±10%                  | CL05B152KA5NINN# |
| 38  | 0.55                | 25                  | X7R | 3.3nF       | ±5%                   | CL05B332JA5NINN# |
| 39  | 0.55                | 25                  | X7R | 4.7nF       | ±10%                  | CL05B472KA5NFN#  |
| 40  | 0.55                | 25                  | X7R | 4.7nF       | ±10%                  | CL05B472KA5NINN# |
| 41  | 0.55                | 25                  | X7R | 5.6nF       | ±10%                  | CL05B562KA5NINN# |
| 42  | 0.55                | 25                  | X7R | 6.8nF       | ±10%                  | CL05B682KA5NINN# |
| 43  | 0.55                | 25                  | X7R | 8.2nF       | ±10%                  | CL05B822KA5NINN# |
| 44  | 0.55                | 25                  | X7R | 10nF        | ±10%                  | CL05B103KA5NFN#  |
| 45  | 0.55                | 25                  | X7R | 10nF        | ±10%                  | CL05B103KA5NINN# |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 0402/1005

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 46  | 0.55                | 25                  | X7R | 18nF        | ±10%                  | CL05B183KA5NHN# |
| 47  | 0.55                | 25                  | X7R | 22nF        | ±10%                  | CL05B223KA5NHN# |
| 48  | 0.55                | 25                  | X7R | 47nF        | ±10%                  | CL05B473KA5NHN# |
| 49  | 0.55                | 25                  | X7R | 100nF       | ±10%                  | CL05B104KA5NHN# |
| 50  | 0.55                | 25                  | X7R | 100nF       | ±10%                  | CL05B104KA5SN#  |
| 51  | 0.55                | 25                  | X7R | 560pF       | ±10%                  | CL05B561KA5NHN# |
| 52  | 0.55                | 50                  | X7R | 1nF         | ±10%                  | CL05B102KB5NHN# |
| 53  | 0.55                | 50                  | X7R | 1nF         | ±10%                  | CL05B102KB5NHN# |
| 54  | 0.55                | 50                  | X7R | 1nF         | ±10%                  | CL05B102KB5NHN# |
| 55  | 0.55                | 50                  | X7R | 1nF         | ±5%                   | CL05B102JB5NHN# |
| 56  | 0.55                | 50                  | X7R | 1.2nF       | ±5%                   | CL05B122JB5NHN# |
| 57  | 0.55                | 50                  | X7R | 1.5nF       | ±10%                  | CL05B152KB5NHN# |
| 58  | 0.55                | 50                  | X7R | 1.5nF       | ±5%                   | CL05B152JB5NHN# |
| 59  | 0.55                | 50                  | X7R | 1.8nF       | ±10%                  | CL05B182KB5NHN# |
| 60  | 0.55                | 50                  | X7R | 2.2nF       | ±10%                  | CL05B222KB5NHN# |
| 61  | 0.55                | 50                  | X7R | 2.2nF       | ±10%                  | CL05B222KB5NHN# |
| 62  | 0.55                | 50                  | X7R | 2.2nF       | ±5%                   | CL05B222JB5NHN# |
| 63  | 0.55                | 50                  | X7R | 2.7nF       | ±10%                  | CL05B272KB5NHN# |
| 64  | 0.55                | 50                  | X7R | 3.3nF       | ±10%                  | CL05B332KB5NHN# |
| 65  | 0.55                | 50                  | X7R | 3.3nF       | ±10%                  | CL05B332KB5NHN# |
| 66  | 0.55                | 50                  | X7R | 3.9nF       | ±10%                  | CL05B392KB5NHN# |
| 67  | 0.55                | 50                  | X7R | 4.7nF       | ±10%                  | CL05B472KB5NHN# |
| 68  | 0.55                | 50                  | X7R | 4.7nF       | ±10%                  | CL05B472KB5NHN# |
| 69  | 0.55                | 50                  | X7R | 4.7nF       | ±5%                   | CL05B472JB5NHN# |
| 70  | 0.55                | 50                  | X7R | 5.6nF       | ±10%                  | CL05B562KB5NHN# |
| 71  | 0.55                | 50                  | X7R | 5.6nF       | ±10%                  | CL05B562KB5NHN# |
| 72  | 0.55                | 50                  | X7R | 6.8nF       | ±10%                  | CL05B682KB5NHN# |
| 73  | 0.55                | 50                  | X7R | 6.8nF       | ±5%                   | CL05B682JB5NHN# |
| 74  | 0.55                | 50                  | X7R | 8.2nF       | ±10%                  | CL05B822KB5NHN# |
| 75  | 0.55                | 50                  | X7R | 10nF        | ±10%                  | CL05B103KB5NHN# |
| 76  | 0.55                | 50                  | X7R | 10nF        | ±10%                  | CL05B103KB5NHN# |
| 77  | 0.55                | 50                  | X7R | 15nF        | ±10%                  | CL05B153KB5NHN# |
| 78  | 0.55                | 50                  | X7R | 22nF        | ±10%                  | CL05B223KB5NHN# |
| 79  | 0.55                | 50                  | X7R | 100nF       | ±10%                  | CL05B104KB5NHN# |
| 80  | 0.55                | 50                  | X7R | 100nF       | ±10%                  | CL05B104KB5NHN# |
| 81  | 0.55                | 50                  | X7R | 150pF       | ±10%                  | CL05B151KB5NHN# |
| 82  | 0.55                | 50                  | X7R | 180pF       | ±10%                  | CL05B181KB5NHN# |
| 83  | 0.55                | 50                  | X7R | 220pF       | ±10%                  | CL05B221KB5NHN# |
| 84  | 0.55                | 50                  | X7R | 220pF       | ±5%                   | CL05B221JB5NHN# |
| 85  | 0.55                | 50                  | X7R | 300pF       | ±10%                  | CL05B301KB5NHN# |
| 86  | 0.55                | 50                  | X7R | 330pF       | ±10%                  | CL05B331KB5NHN# |
| 87  | 0.55                | 50                  | X7R | 330pF       | ±5%                   | CL05B331JB5NHN# |
| 88  | 0.55                | 50                  | X7R | 390pF       | ±10%                  | CL05B391KB5NHN# |
| 89  | 0.55                | 50                  | X7R | 470pF       | ±10%                  | CL05B471KB5NHN# |
| 90  | 0.55                | 50                  | X7R | 470pF       | ±10%                  | CL05B471KB5NHN# |
| 91  | 0.55                | 50                  | X7R | 560pF       | ±5%                   | CL05B561JB5NHN# |
| 92  | 0.55                | 50                  | X7R | 680pF       | ±10%                  | CL05B681KB5NHN# |
| 93  | 0.55                | 50                  | X7R | 680pF       | ±5%                   | CL05B681JB5NHN# |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 0603/1608

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number      |
|-----|---------------------|---------------------|-----|-------------|-----------------------|------------------|
| 1   | 0.90                | 6.3                 | X7R | 1uF         | ±10%                  | CL10B105KQ8NINN# |
| 2   | 0.90                | 6.3                 | X7R | 2.2uF       | ±10%                  | CL10B225KQ8NFIN# |
| 3   | 0.90                | 6.3                 | X7R | 2.2uF       | ±10%                  | CL10B225KQ8NINN# |
| 4   | 0.90                | 6.3                 | X7R | 470nF       | ±10%                  | CL10B474KQ8NINN# |
| 5   | 0.90                | 6.3                 | X7R | 680nF       | ±10%                  | CL10B684KQ8NINN# |
| 6   | 0.90                | 10                  | X7R | 1uF         | ±10%                  | CL10B105KP8NFIN# |
| 7   | 0.90                | 10                  | X7R | 1uF         | ±10%                  | CL10B105KP8NINN# |
| 8   | 0.90                | 10                  | X7R | 2.2uF       | ±10%                  | CL10B225KP8NFIN# |
| 9   | 0.90                | 10                  | X7R | 2.2uF       | ±10%                  | CL10B225KP8NINN# |
| 10  | 0.90                | 10                  | X7R | 220nF       | ±10%                  | CL10B224KP8NFIN# |
| 11  | 0.90                | 10                  | X7R | 220nF       | ±5%                   | CL10B224JP8NINN# |
| 12  | 0.90                | 10                  | X7R | 330nF       | ±10%                  | CL10B334KP8NINN# |
| 13  | 0.90                | 10                  | X7R | 470nF       | ±10%                  | CL10B474KP8NINN# |
| 14  | 0.90                | 16                  | X7R | 1uF         | ±10%                  | CL10B105K08NFIN# |
| 15  | 0.90                | 16                  | X7R | 1uF         | ±10%                  | CL10B105K08NINN# |
| 16  | 0.90                | 16                  | X7R | 1uF         | ±10%                  | CL10B105K08SFN#  |
| 17  | 0.90                | 16                  | X7R | 1uF         | ±10%                  | CL10B105K08ZFN#  |
| 18  | 0.90                | 16                  | X7R | 10nF        | ±10%                  | CL10B103K08NINN# |
| 19  | 0.90                | 16                  | X7R | 15nF        | ±10%                  | CL10B153K08NINN# |
| 20  | 0.90                | 16                  | X7R | 22nF        | ±10%                  | CL10B223K08NINN# |
| 21  | 0.90                | 16                  | X7R | 27nF        | ±10%                  | CL10B273K08NINN# |
| 22  | 0.90                | 16                  | X7R | 33nF        | ±10%                  | CL10B333K08NFIN# |
| 23  | 0.90                | 16                  | X7R | 39nF        | ±10%                  | CL10B393K08NINN# |
| 24  | 0.90                | 16                  | X7R | 47nF        | ±10%                  | CL10B473K08NFIN# |
| 25  | 0.90                | 16                  | X7R | 47nF        | ±10%                  | CL10B473K08NINN# |
| 26  | 0.90                | 16                  | X7R | 47nF        | ±5%                   | CL10B473J08NINN# |
| 27  | 0.90                | 16                  | X7R | 56nF        | ±10%                  | CL10B563K08NINN# |
| 28  | 0.90                | 16                  | X7R | 82nF        | ±10%                  | CL10B823K08NINN# |
| 29  | 0.90                | 16                  | X7R | 100nF       | ±10%                  | CL10B104K08NFIN# |
| 30  | 0.90                | 16                  | X7R | 100nF       | ±10%                  | CL10B104K08NINN# |
| 31  | 0.90                | 16                  | X7R | 150nF       | ±10%                  | CL10B154K08NFIN# |
| 32  | 0.90                | 16                  | X7R | 150nF       | ±10%                  | CL10B154K08NINN# |
| 33  | 0.90                | 16                  | X7R | 220nF       | ±10%                  | CL10B224K08NFIN# |
| 34  | 0.90                | 16                  | X7R | 220nF       | ±10%                  | CL10B224K08NINN# |
| 35  | 0.90                | 16                  | X7R | 220nF       | ±10%                  | CL10B224K08SFN#  |
| 36  | 0.90                | 16                  | X7R | 220nF       | ±5%                   | CL10B224J08NINN# |
| 37  | 0.90                | 16                  | X7R | 220nF       | ±5%                   | CL10B224J08SFN#  |
| 38  | 0.90                | 16                  | X7R | 330nF       | ±10%                  | CL10B334K08NFIN# |
| 39  | 0.90                | 16                  | X7R | 330nF       | ±10%                  | CL10B334K08NINN# |
| 40  | 0.90                | 16                  | X7R | 470nF       | ±10%                  | CL10B474K08NFIN# |
| 41  | 0.90                | 16                  | X7R | 470nF       | ±10%                  | CL10B474K08NINN# |
| 42  | 0.90                | 16                  | X7R | 680nF       | ±10%                  | CL10B684K08NFIN# |
| 43  | 0.90                | 25                  | X7R | 1uF         | ±10%                  | CL10B105KA8NFIN# |
| 44  | 0.90                | 25                  | X7R | 1uF         | ±10%                  | CL10B105KA8NINN# |
| 45  | 0.90                | 25                  | X7R | 1uF         | ±10%                  | CL10B105KA8ZFN#  |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 0603/1608

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 46  | 0.90                | 25                  | X7R | 4.7nF       | ±10%                  | CL10B472KA8NNN# |
| 47  | 0.90                | 25                  | X7R | 10nF        | ±10%                  | CL10B103KA8NFN# |
| 48  | 0.90                | 25                  | X7R | 10nF        | ±10%                  | CL10B103KA8NNN# |
| 49  | 0.90                | 25                  | X7R | 22nF        | ±10%                  | CL10B223KA8NFN# |
| 50  | 0.90                | 25                  | X7R | 27nF        | ±10%                  | CL10B273KA8NNN# |
| 51  | 0.90                | 25                  | X7R | 47nF        | ±10%                  | CL10B473KA8NFN# |
| 52  | 0.90                | 25                  | X7R | 56nF        | ±10%                  | CL10B563KA8NNN# |
| 53  | 0.90                | 25                  | X7R | 68nF        | ±10%                  | CL10B683KA8NNN# |
| 54  | 0.90                | 25                  | X7R | 100nF       | ±10%                  | CL10B104KA8NFN# |
| 55  | 0.90                | 25                  | X7R | 100nF       | ±10%                  | CL10B104KA8NNN# |
| 56  | 0.90                | 25                  | X7R | 100nF       | ±5%                   | CL10B104JA8NNN# |
| 57  | 0.90                | 25                  | X7R | 150nF       | ±10%                  | CL10B154KA8NFN# |
| 58  | 0.90                | 25                  | X7R | 220nF       | ±10%                  | CL10B224KA8NFN# |
| 59  | 0.90                | 25                  | X7R | 220nF       | ±10%                  | CL10B224KA8NNN# |
| 60  | 0.90                | 25                  | X7R | 220nF       | ±10%                  | CL10B224KA8SFN# |
| 61  | 0.90                | 25                  | X7R | 470nF       | ±10%                  | CL10B474KA8NFN# |
| 62  | 0.90                | 25                  | X7R | 470nF       | ±10%                  | CL10B474KA8NNN# |
| 63  | 0.90                | 25                  | X7R | 470nF       | ±10%                  | CL10B474KA8SNN# |
| 64  | 0.90                | 50                  | X7R | 1nF         | ±10%                  | CL10B102KB8NKN# |
| 65  | 0.90                | 50                  | X7R | 1nF         | ±10%                  | CL10B102KB8NFN# |
| 66  | 0.90                | 50                  | X7R | 1nF         | ±10%                  | CL10B102KB8NNN# |
| 67  | 0.90                | 50                  | X7R | 1nF         | ±10%                  | CL10B102KB8SFN# |
| 68  | 0.90                | 50                  | X7R | 1nF         | ±5%                   | CL10B102JB8NFN# |
| 69  | 0.90                | 50                  | X7R | 1.2nF       | ±10%                  | CL10B122KB8NFN# |
| 70  | 0.90                | 50                  | X7R | 1.2nF       | ±10%                  | CL10B122KB8NNN# |
| 71  | 0.90                | 50                  | X7R | 1.5nF       | ±10%                  | CL10B152KB8NFN# |
| 72  | 0.90                | 50                  | X7R | 1.5nF       | ±10%                  | CL10B152KB8NNN# |
| 73  | 0.90                | 50                  | X7R | 1.5nF       | ±10%                  | CL10B152KB8SFN# |
| 74  | 0.90                | 50                  | X7R | 1.8nF       | ±10%                  | CL10B182KB8NFN# |
| 75  | 0.90                | 50                  | X7R | 2nF         | ±10%                  | CL10B202KB8NNN# |
| 76  | 0.90                | 50                  | X7R | 2.2nF       | ±10%                  | CL10B222KB8NFN# |
| 77  | 0.90                | 50                  | X7R | 2.2nF       | ±10%                  | CL10B222KB8NNN# |
| 78  | 0.90                | 50                  | X7R | 2.2nF       | ±10%                  | CL10B222KB8SFN# |
| 79  | 0.90                | 50                  | X7R | 2.2nF       | ±10%                  | CL10B222KB8ZNN# |
| 80  | 0.90                | 50                  | X7R | 2.7nF       | ±10%                  | CL10B272KB8NFN# |
| 81  | 0.90                | 50                  | X7R | 2.7nF       | ±10%                  | CL10B272KB8NNN# |
| 82  | 0.90                | 50                  | X7R | 2.7nF       | ±10%                  | CL10B272KB8SFN# |
| 83  | 0.90                | 50                  | X7R | 2.7nF       | ±5%                   | CL10B272JB8NNN# |
| 84  | 0.90                | 50                  | X7R | 3.3nF       | ±10%                  | CL10B332KB8NFN# |
| 85  | 0.90                | 50                  | X7R | 3.3nF       | ±10%                  | CL10B332KB8NNN# |
| 86  | 0.90                | 50                  | X7R | 3.3nF       | ±20%                  | CL10B332MB8NNN# |
| 87  | 0.90                | 50                  | X7R | 3.9nF       | ±10%                  | CL10B392KB8NFN# |
| 88  | 0.90                | 50                  | X7R | 3.9nF       | ±10%                  | CL10B392KB8NNN# |
| 89  | 0.90                | 50                  | X7R | 4.7nF       | ±10%                  | CL10B472KB8NFN# |
| 90  | 0.90                | 50                  | X7R | 4.7nF       | ±10%                  | CL10B472KB8NNN# |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 0603/1608

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 91  | 0.90                | 50                  | X7R | 4.7nF       | ±10%                  | CL10B472KB8SFN# |
| 92  | 0.90                | 50                  | X7R | 4.7nF       | ±10%                  | CL10B472KB8ZNN# |
| 93  | 0.90                | 50                  | X7R | 5.6nF       | ±10%                  | CL10B562KB8NFN# |
| 94  | 0.90                | 50                  | X7R | 5.6nF       | ±10%                  | CL10B562KB8NNN# |
| 95  | 0.90                | 50                  | X7R | 5.6nF       | ±5%                   | CL10B562JB8NNN# |
| 96  | 0.90                | 50                  | X7R | 6.8nF       | ±10%                  | CL10B682KB8NFN# |
| 97  | 0.90                | 50                  | X7R | 6.8nF       | ±10%                  | CL10B682KB8NNN# |
| 98  | 0.90                | 50                  | X7R | 6.8nF       | ±5%                   | CL10B682JB8NNN# |
| 99  | 0.90                | 50                  | X7R | 8.2nF       | ±10%                  | CL10B822KB8NFN# |
| 100 | 0.90                | 50                  | X7R | 10nF        | ±10%                  | CL10B103KB8NFN# |
| 101 | 0.90                | 50                  | X7R | 10nF        | ±10%                  | CL10B103KB8NNN# |
| 102 | 0.90                | 50                  | X7R | 10nF        | ±10%                  | CL10B103KB8ZNN# |
| 103 | 0.90                | 50                  | X7R | 10nF        | ±20%                  | CL10B103MB8NCN# |
| 104 | 0.90                | 50                  | X7R | 10nF        | ±20%                  | CL10B103MB8NNN# |
| 105 | 0.90                | 50                  | X7R | 10nF        | ±5%                   | CL10B103JB8NFN# |
| 106 | 0.90                | 50                  | X7R | 12nF        | ±10%                  | CL10B123KB8NNN# |
| 107 | 0.90                | 50                  | X7R | 15nF        | ±10%                  | CL10B153KB8NFN# |
| 108 | 0.90                | 50                  | X7R | 15nF        | ±10%                  | CL10B153KB8NNN# |
| 109 | 0.90                | 50                  | X7R | 15nF        | ±10%                  | CL10B153KB8SFN# |
| 110 | 0.90                | 50                  | X7R | 18nF        | ±5%                   | CL10B183JB8NNN# |
| 111 | 0.90                | 50                  | X7R | 20nF        | ±10%                  | CL10B203KB8NNN# |
| 112 | 0.90                | 50                  | X7R | 22nF        | ±10%                  | CL10B223KB8NFN# |
| 113 | 0.90                | 50                  | X7R | 22nF        | ±10%                  | CL10B223KB8NNN# |
| 114 | 0.90                | 50                  | X7R | 22nF        | ±10%                  | CL10B223KB8SFN# |
| 115 | 0.90                | 50                  | X7R | 22nF        | ±5%                   | CL10B223JB8NFN# |
| 116 | 0.90                | 50                  | X7R | 27nF        | ±10%                  | CL10B273KB8NNN# |
| 117 | 0.90                | 50                  | X7R | 33nF        | ±10%                  | CL10B333KB8NFN# |
| 118 | 0.90                | 50                  | X7R | 33nF        | ±10%                  | CL10B333KB8NNN# |
| 119 | 0.90                | 50                  | X7R | 33nF        | ±10%                  | CL10B333KB8SFN# |
| 120 | 0.90                | 50                  | X7R | 39nF        | ±10%                  | CL10B393KB8NNN# |
| 121 | 0.90                | 50                  | X7R | 47nF        | ±10%                  | CL10B473KB8NFN# |
| 122 | 0.90                | 50                  | X7R | 47nF        | ±10%                  | CL10B473KB8NNN# |
| 123 | 0.90                | 50                  | X7R | 47nF        | ±10%                  | CL10B473KB8SFN# |
| 124 | 0.90                | 50                  | X7R | 47nF        | ±10%                  | CL10B473KB8ZNN# |
| 125 | 0.90                | 50                  | X7R | 47nF        | ±5%                   | CL10B473JB8NNN# |
| 126 | 0.90                | 50                  | X7R | 56nF        | ±10%                  | CL10B563KB8SFN# |
| 127 | 0.90                | 50                  | X7R | 68nF        | ±10%                  | CL10B683KB8NFN# |
| 128 | 0.90                | 50                  | X7R | 68nF        | ±10%                  | CL10B683KB8NNN# |
| 129 | 0.90                | 50                  | X7R | 82nF        | ±10%                  | CL10B823KB8NFN# |
| 130 | 0.90                | 50                  | X7R | 100nF       | ±10%                  | CL10B104KB8NFN# |
| 131 | 0.90                | 50                  | X7R | 100nF       | ±10%                  | CL10B104KB8NNN# |
| 132 | 0.90                | 50                  | X7R | 100nF       | ±10%                  | CL10B104KB8SFN# |
| 133 | 0.90                | 50                  | X7R | 100nF       | ±10%                  | CL10B104KB8ZNN# |
| 134 | 0.90                | 50                  | X7R | 100nF       | ±20%                  | CL10B104MB8NFN# |
| 135 | 0.90                | 50                  | X7R | 100nF       | ±20%                  | CL10B104MB8NNN# |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 0603/1608

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number      |
|-----|---------------------|---------------------|-----|-------------|-----------------------|------------------|
| 136 | 0.90                | 50                  | X7R | 100nF       | ±5%                   | CL10B104JB8NINN# |
| 137 | 0.90                | 50                  | X7R | 100pF       | ±10%                  | CL10B101KB8NFN#  |
| 138 | 0.90                | 50                  | X7R | 120pF       | ±10%                  | CL10B121KB8NINN# |
| 139 | 0.90                | 50                  | X7R | 150pF       | ±10%                  | CL10B151KB8NINN# |
| 140 | 0.90                | 50                  | X7R | 200pF       | ±10%                  | CL10B201KB8NINN# |
| 141 | 0.90                | 50                  | X7R | 220nF       | ±10%                  | CL10B224KB8NFN#  |
| 142 | 0.90                | 50                  | X7R | 220nF       | ±10%                  | CL10B224KB8NINN# |
| 143 | 0.90                | 50                  | X7R | 220nF       | ±10%                  | CL10B224KB8SFN#  |
| 144 | 0.90                | 50                  | X7R | 220nF       | ±10%                  | CL10B224KB8ZNN#  |
| 145 | 0.90                | 50                  | X7R | 220pF       | ±10%                  | CL10B221KB8NFN#  |
| 146 | 0.90                | 50                  | X7R | 220pF       | ±10%                  | CL10B221KB8NINN# |
| 147 | 0.90                | 50                  | X7R | 220pF       | ±5%                   | CL10B221JB8NINN# |
| 148 | 0.90                | 50                  | X7R | 330pF       | ±10%                  | CL10B331KB8NFN#  |
| 149 | 0.90                | 50                  | X7R | 330pF       | ±10%                  | CL10B331KB8NINN# |
| 150 | 0.90                | 50                  | X7R | 330pF       | ±5%                   | CL10B331JB8NINN# |
| 151 | 0.90                | 50                  | X7R | 390pF       | ±10%                  | CL10B391KB8NINN# |
| 152 | 0.90                | 50                  | X7R | 470pF       | ±10%                  | CL10B471KB8NFN#  |
| 153 | 0.90                | 50                  | X7R | 470pF       | ±10%                  | CL10B471KB8NINN# |
| 154 | 0.90                | 50                  | X7R | 470pF       | ±5%                   | CL10B471JB8NINN# |
| 155 | 0.90                | 50                  | X7R | 510pF       | ±10%                  | CL10B511KB8NINN# |
| 156 | 0.90                | 50                  | X7R | 560pF       | ±5%                   | CL10B561JB8NINN# |
| 157 | 0.90                | 50                  | X7R | 680pF       | ±10%                  | CL10B681KB8NFN#  |
| 158 | 0.90                | 50                  | X7R | 680pF       | ±5%                   | CL10B681JB8NINN# |
| 159 | 0.90                | 100                 | X7R | 1nF         | ±10%                  | CL10B102KC8NFN#  |
| 160 | 0.90                | 100                 | X7R | 1nF         | ±10%                  | CL10B102KC8NINN# |
| 161 | 0.90                | 100                 | X7R | 1.5nF       | ±10%                  | CL10B152KC8NINN# |
| 162 | 0.90                | 100                 | X7R | 3.3nF       | ±10%                  | CL10B332KC8NINN# |
| 163 | 0.90                | 100                 | X7R | 4.7nF       | ±10%                  | CL10B472KC8NINN# |
| 164 | 0.90                | 100                 | X7R | 10nF        | ±10%                  | CL10B103KC8NINN# |
| 165 | 0.90                | 100                 | X7R | 100nF       | ±10%                  | CL10B104KC8NINN# |
| 166 | 0.95                | 6.3                 | X7R | 4.7uF       | ±10%                  | CL10B475KQ8NFFQ# |
| 167 | 0.95                | 6.3                 | X7R | 4.7uF       | ±10%                  | CL10B475KQ8NQN#  |
| 168 | 0.95                | 6.3                 | X7R | 4.7uF       | ±20%                  | CL10B475MQ8NQN#  |
| 169 | 0.95                | 50                  | X7R | 1uF         | ±10%                  | CL10B105KB8NQN#  |
| 170 | 1.00                | 6.3                 | X7R | 10uF        | ±20%                  | CL10B106MQ8NFR#  |
| 171 | 1.00                | 6.3                 | X7R | 10uF        | ±20%                  | CL10B106MQ8NRN#  |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 0805/2012

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 0.75                | 16                  | X7R | 100nF       | ±10%                  | CL21B104KOANNN# |
| 2   | 0.75                | 16                  | X7R | 150nF       | ±10%                  | CL21B154KOANNN# |
| 3   | 0.75                | 16                  | X7R | 180nF       | ±10%                  | CL21B184KOANNN# |
| 4   | 0.75                | 25                  | X7R | 1nF         | ±10%                  | CL21B102KAANFN# |
| 5   | 0.75                | 25                  | X7R | 10nF        | ±10%                  | CL21B103KAANNN# |
| 6   | 0.75                | 50                  | X7R | 1nF         | ±10%                  | CL21B102KBANFN# |
| 7   | 0.75                | 50                  | X7R | 1nF         | ±10%                  | CL21B102KBANNN# |
| 8   | 0.75                | 50                  | X7R | 1nF         | ±5%                   | CL21B102JBANFN# |
| 9   | 0.75                | 50                  | X7R | 1.2nF       | ±10%                  | CL21B122KBANNN# |
| 10  | 0.75                | 50                  | X7R | 2nF         | ±10%                  | CL21B202KBANNN# |
| 11  | 0.75                | 50                  | X7R | 2.2nF       | ±10%                  | CL21B222KBANFN# |
| 12  | 0.75                | 50                  | X7R | 2.2nF       | ±10%                  | CL21B222KBANNN# |
| 13  | 0.75                | 50                  | X7R | 2.2nF       | ±5%                   | CL21B222JBANNN# |
| 14  | 0.75                | 50                  | X7R | 2.7nF       | ±10%                  | CL21B272KBANNN# |
| 15  | 0.75                | 50                  | X7R | 3.3nF       | ±5%                   | CL21B332JBANNN# |
| 16  | 0.75                | 50                  | X7R | 3.9nF       | ±10%                  | CL21B392KBANNN# |
| 17  | 0.75                | 50                  | X7R | 4.7nF       | ±10%                  | CL21B472KBANFN# |
| 18  | 0.75                | 50                  | X7R | 4.7nF       | ±10%                  | CL21B472KBANNN# |
| 19  | 0.75                | 50                  | X7R | 5.6nF       | ±10%                  | CL21B562KBANFN# |
| 20  | 0.75                | 50                  | X7R | 5.6nF       | ±10%                  | CL21B562KBANNN# |
| 21  | 0.75                | 50                  | X7R | 5.6nF       | ±5%                   | CL21B562JBANNN# |
| 22  | 0.75                | 50                  | X7R | 6.8nF       | ±10%                  | CL21B682KBANFN# |
| 23  | 0.75                | 50                  | X7R | 8.2nF       | ±10%                  | CL21B822KBANNN# |
| 24  | 0.75                | 50                  | X7R | 10nF        | ±10%                  | CL21B103KBANFN# |
| 25  | 0.75                | 50                  | X7R | 10nF        | ±10%                  | CL21B103KBANNN# |
| 26  | 0.75                | 50                  | X7R | 10nF        | ±20%                  | CL21B103MBANNN# |
| 27  | 0.75                | 50                  | X7R | 15nF        | ±10%                  | CL21B153KBANFN# |
| 28  | 0.75                | 50                  | X7R | 15nF        | ±5%                   | CL21B153JBANNN# |
| 29  | 0.75                | 50                  | X7R | 18nF        | ±10%                  | CL21B183KBANNN# |
| 30  | 0.75                | 50                  | X7R | 20nF        | ±10%                  | CL21B203KBANNN# |
| 31  | 0.75                | 50                  | X7R | 22nF        | ±10%                  | CL21B223KBANFN# |
| 32  | 0.75                | 50                  | X7R | 22nF        | ±10%                  | CL21B223KBANNN# |
| 33  | 0.75                | 50                  | X7R | 22nF        | ±5%                   | CL21B223JBANNN# |
| 34  | 0.75                | 50                  | X7R | 27nF        | ±10%                  | CL21B273KBANNN# |
| 35  | 0.75                | 50                  | X7R | 33nF        | ±10%                  | CL21B333KBANFN# |
| 36  | 0.75                | 50                  | X7R | 39nF        | ±10%                  | CL21B393KBANNN# |
| 37  | 0.75                | 50                  | X7R | 100pF       | ±10%                  | CL21B101KBANFN# |
| 38  | 0.75                | 50                  | X7R | 180pF       | ±10%                  | CL21B181KBANNN# |
| 39  | 0.75                | 50                  | X7R | 200pF       | ±10%                  | CL21B201KBANNN# |
| 40  | 0.75                | 50                  | X7R | 220pF       | ±10%                  | CL21B221KBANFN# |
| 41  | 0.75                | 50                  | X7R | 300pF       | ±10%                  | CL21B301KBANNN# |
| 42  | 0.75                | 50                  | X7R | 330pF       | ±5%                   | CL21B331JBANNN# |
| 43  | 0.75                | 50                  | X7R | 470pF       | ±10%                  | CL21B471KBANFN# |
| 44  | 0.75                | 50                  | X7R | 470pF       | ±5%                   | CL21B471JBANNN# |
| 45  | 0.75                | 50                  | X7R | 510pF       | ±10%                  | CL21B511KBANNN# |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 0805/2012

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 46  | 0.75                | 50                  | X7R | 680pF       | ±10%                  | CL21B681KBANFN# |
| 47  | 0.75                | 100                 | X7R | 1nF         | ±10%                  | CL21B102KCANNN# |
| 48  | 0.75                | 100                 | X7R | 1nF         | ±5%                   | CL21B102JCANNN# |
| 49  | 0.75                | 100                 | X7R | 1.5nF       | ±10%                  | CL21B152KCANNN# |
| 50  | 0.75                | 100                 | X7R | 2.2nF       | ±10%                  | CL21B222KCANFN# |
| 51  | 0.75                | 100                 | X7R | 4.7nF       | ±10%                  | CL21B472KCANFN# |
| 52  | 0.75                | 100                 | X7R | 6.8nF       | ±10%                  | CL21B682KCANFN# |
| 53  | 0.75                | 100                 | X7R | 6.8nF       | ±10%                  | CL21B682KCANNN# |
| 54  | 0.75                | 100                 | X7R | 10nF        | ±10%                  | CL21B103KCANFN# |
| 55  | 0.75                | 100                 | X7R | 10nF        | ±10%                  | CL21B103KCANNN# |
| 56  | 0.75                | 100                 | X7R | 220pF       | ±10%                  | CL21B221KCANFN# |
| 57  | 0.75                | 100                 | X7R | 270pF       | ±10%                  | CL21B271KCANNN# |
| 58  | 0.75                | 100                 | X7R | 330pF       | ±10%                  | CL21B331KCANNN# |
| 59  | 0.95                | 16                  | X7R | 270nF       | ±10%                  | CL21B274KOCNNN# |
| 60  | 0.95                | 16                  | X7R | 330nF       | ±10%                  | CL21B334KOCNNN# |
| 61  | 0.95                | 25                  | X7R | 100nF       | ±10%                  | CL21B104KACNFN# |
| 62  | 0.95                | 25                  | X7R | 100nF       | ±10%                  | CL21B104KACNNN# |
| 63  | 0.95                | 25                  | X7R | 100nF       | ±20%                  | CL21B104MACNNN# |
| 64  | 0.95                | 25                  | X7R | 120nF       | ±10%                  | CL21B124KACNNN# |
| 65  | 0.95                | 25                  | X7R | 120nF       | ±5%                   | CL21B124JACNNN# |
| 66  | 0.95                | 50                  | X7R | 1nF         | ±10%                  | CL21B102KBCNNN# |
| 67  | 0.95                | 50                  | X7R | 2.2nF       | ±10%                  | CL21B222KBCNNN# |
| 68  | 0.95                | 50                  | X7R | 10nF        | ±10%                  | CL21B103KBCNNN# |
| 69  | 0.95                | 50                  | X7R | 10nF        | ±5%                   | CL21B103JBCNNN# |
| 70  | 0.95                | 50                  | X7R | 47nF        | ±10%                  | CL21B473KBCNFN# |
| 71  | 0.95                | 50                  | X7R | 47nF        | ±10%                  | CL21B473KBCNNN# |
| 72  | 0.95                | 50                  | X7R | 47nF        | ±20%                  | CL21B473MBCNNN# |
| 73  | 0.95                | 50                  | X7R | 56nF        | ±10%                  | CL21B563KBCNNN# |
| 74  | 0.95                | 50                  | X7R | 68nF        | ±10%                  | CL21B683KBCNFN# |
| 75  | 0.95                | 50                  | X7R | 68nF        | ±5%                   | CL21B683JBCNNN# |
| 76  | 0.95                | 50                  | X7R | 82nF        | ±10%                  | CL21B823KBCNNN# |
| 77  | 0.95                | 50                  | X7R | 100nF       | ±10%                  | CL21B104KBCNFN# |
| 78  | 0.95                | 50                  | X7R | 100nF       | ±10%                  | CL21B104KBCNNN# |
| 79  | 0.95                | 50                  | X7R | 100nF       | ±10%                  | CL21B104KBCSFN# |
| 80  | 0.95                | 50                  | X7R | 100nF       | ±5%                   | CL21B104JBCNFN# |
| 81  | 0.95                | 100                 | X7R | 15nF        | ±10%                  | CL21B153KCCNNN# |
| 82  | 0.95                | 200                 | X7R | 1nF         | ±10%                  | CL21B102KDCNFN# |
| 83  | 0.95                | 200                 | X7R | 1nF         | ±5%                   | CL21B102JDCNNN# |
| 84  | 0.95                | 200                 | X7R | 1.8nF       | ±10%                  | CL21B182KDCNNN# |
| 85  | 0.95                | 200                 | X7R | 2.2nF       | ±10%                  | CL21B222KDCNFN# |
| 86  | 0.95                | 200                 | X7R | 4.7nF       | ±10%                  | CL21B472KDCNNN# |
| 87  | 0.95                | 200                 | X7R | 10nF        | ±10%                  | CL21B103KDCNFN# |
| 88  | 0.95                | 200                 | X7R | 10nF        | ±10%                  | CL21B103KDCNNN# |
| 89  | 0.95                | 200                 | X7R | 220pF       | ±10%                  | CL21B221KDCNFN# |
| 90  | 0.95                | 200                 | X7R | 470pF       | ±10%                  | CL21B471KDCNFN# |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 0805/2012

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 91  | 0.95                | 250                 | X7R | 1nF         | ±10%                  | CL21B102KECSFN# |
| 92  | 0.95                | 250                 | X7R | 1nF         | ±10%                  | CL21B102KECSNN# |
| 93  | 1.35                | 10                  | X7R | 1uF         | ±10%                  | CL21B105KPFNNN# |
| 94  | 1.35                | 10                  | X7R | 1uF         | ±20%                  | CL21B105MPFNNN# |
| 95  | 1.35                | 10                  | X7R | 2.2uF       | ±10%                  | CL21B225KPFNNN# |
| 96  | 1.35                | 10                  | X7R | 3.3uF       | ±10%                  | CL21B335KPFNNN# |
| 97  | 1.35                | 10                  | X7R | 4.7uF       | ±10%                  | CL21B475KPFN3N# |
| 98  | 1.35                | 10                  | X7R | 4.7uF       | ±10%                  | CL21B475KPFNFN# |
| 99  | 1.35                | 10                  | X7R | 680nF       | ±10%                  | CL21B684KPFNNN# |
| 100 | 1.35                | 16                  | X7R | 1uF         | ±10%                  | CL21B105KOFNFN# |
| 101 | 1.35                | 16                  | X7R | 1uF         | ±10%                  | CL21B105KOFNNN# |
| 102 | 1.35                | 16                  | X7R | 1uF         | ±10%                  | CL21B105KOFSFN# |
| 103 | 1.35                | 16                  | X7R | 1uF         | ±20%                  | CL21B105MOFNNN# |
| 104 | 1.35                | 16                  | X7R | 2.2uF       | ±10%                  | CL21B225KOFNFN# |
| 105 | 1.35                | 16                  | X7R | 2.2uF       | ±10%                  | CL21B225KOFNNN# |
| 106 | 1.35                | 16                  | X7R | 4.7uF       | ±10%                  | CL21B475KOFNFN# |
| 107 | 1.35                | 16                  | X7R | 4.7uF       | ±10%                  | CL21B475KOFZFN# |
| 108 | 1.35                | 16                  | X7R | 220nF       | ±10%                  | CL21B224KOFNNN# |
| 109 | 1.35                | 16                  | X7R | 470nF       | ±10%                  | CL21B474KOFNFN# |
| 110 | 1.35                | 16                  | X7R | 470nF       | ±10%                  | CL21B474KOFNNN# |
| 111 | 1.35                | 16                  | X7R | 680nF       | ±10%                  | CL21B684KOFNFN# |
| 112 | 1.35                | 16                  | X7R | 680nF       | ±5%                   | CL21B684JOFNNN# |
| 113 | 1.35                | 25                  | X7R | 1uF         | ±10%                  | CL21B105KAFN3N# |
| 114 | 1.35                | 25                  | X7R | 1uF         | ±10%                  | CL21B105KAFNFN# |
| 115 | 1.35                | 25                  | X7R | 1uF         | ±10%                  | CL21B105KAFNNN# |
| 116 | 1.35                | 25                  | X7R | 1uF         | ±10%                  | CL21B105KAFSFN# |
| 117 | 1.35                | 25                  | X7R | 1uF         | ±20%                  | CL21B105MAFNNN# |
| 118 | 1.35                | 25                  | X7R | 1.5uF       | ±10%                  | CL21B155KAFNFN# |
| 119 | 1.35                | 25                  | X7R | 2.2uF       | ±10%                  | CL21B225KAFNFN# |
| 120 | 1.35                | 25                  | X7R | 2.2uF       | ±10%                  | CL21B225KAFZNN# |
| 121 | 1.35                | 25                  | X7R | 2.2uF       | ±20%                  | CL21B225MAFNNN# |
| 122 | 1.35                | 25                  | X7R | 3.3uF       | ±10%                  | CL21B335KAFNFN# |
| 123 | 1.35                | 25                  | X7R | 4.7uF       | ±10%                  | CL21B475KAFNFN# |
| 124 | 1.35                | 25                  | X7R | 4.7uF       | ±10%                  | CL21B475KAFNNN# |
| 125 | 1.35                | 25                  | X7R | 4.7uF       | ±10%                  | CL21B475KAFZF6# |
| 126 | 1.35                | 25                  | X7R | 4.7uF       | ±10%                  | CL21B475KAFZFN# |
| 127 | 1.35                | 25                  | X7R | 4.7uF       | ±20%                  | CL21B475MAFNNN# |
| 128 | 1.35                | 25                  | X7R | 100nF       | ±10%                  | CL21B104KAFNNN# |
| 129 | 1.35                | 25                  | X7R | 220nF       | ±10%                  | CL21B224KAFNFN# |
| 130 | 1.35                | 25                  | X7R | 220nF       | ±10%                  | CL21B224KAFNNN# |
| 131 | 1.35                | 25                  | X7R | 220nF       | ±20%                  | CL21B224MAFNNN# |
| 132 | 1.35                | 25                  | X7R | 220nF       | ±5%                   | CL21B224JAFNNN# |
| 133 | 1.35                | 25                  | X7R | 470nF       | ±10%                  | CL21B474KAFNFN# |
| 134 | 1.35                | 25                  | X7R | 470nF       | ±10%                  | CL21B474KAFNNN# |
| 135 | 1.35                | 25                  | X7R | 470nF       | ±10%                  | CL21B474KAFSFN# |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 0805/2012

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 136 | 1.35                | 25                  | X7R | 470nF       | ±20%                  | CL21B474MAFN#   |
| 137 | 1.35                | 25                  | X7R | 470nF       | ±5%                   | CL21B474JAFN#   |
| 138 | 1.35                | 50                  | X7R | 1uF         | ±10%                  | CL21B105KBFN3T# |
| 139 | 1.35                | 50                  | X7R | 1uF         | ±10%                  | CL21B105KBFN#   |
| 140 | 1.35                | 50                  | X7R | 1uF         | ±10%                  | CL21B105KBFN#   |
| 141 | 1.35                | 50                  | X7R | 1uF         | ±10%                  | CL21B105KBFN#   |
| 142 | 1.35                | 50                  | X7R | 1uF         | ±10%                  | CL21B105KBFN#   |
| 143 | 1.35                | 50                  | X7R | 1uF         | ±20%                  | CL21B105MBFN#   |
| 144 | 1.35                | 50                  | X7R | 68nF        | ±10%                  | CL21B683KBFN#   |
| 145 | 1.35                | 50                  | X7R | 82nF        | ±10%                  | CL21B823KBFN#   |
| 146 | 1.35                | 50                  | X7R | 100nF       | ±10%                  | CL21B104KBFN#   |
| 147 | 1.35                | 50                  | X7R | 100nF       | ±20%                  | CL21B104MBFN#   |
| 148 | 1.35                | 50                  | X7R | 120nF       | ±10%                  | CL21B124KBFN#   |
| 149 | 1.35                | 50                  | X7R | 150nF       | ±10%                  | CL21B154KBFN#   |
| 150 | 1.35                | 50                  | X7R | 150nF       | ±10%                  | CL21B154KBFN#   |
| 151 | 1.35                | 50                  | X7R | 220nF       | ±10%                  | CL21B224KBFN#   |
| 152 | 1.35                | 50                  | X7R | 220nF       | ±10%                  | CL21B224KBFN#   |
| 153 | 1.35                | 50                  | X7R | 330nF       | ±10%                  | CL21B334KBFN#   |
| 154 | 1.35                | 50                  | X7R | 330nF       | ±10%                  | CL21B334KBFN#   |
| 155 | 1.35                | 50                  | X7R | 330nF       | ±20%                  | CL21B334MBFN#   |
| 156 | 1.35                | 50                  | X7R | 470nF       | ±10%                  | CL21B474KBFN#   |
| 157 | 1.35                | 50                  | X7R | 470nF       | ±10%                  | CL21B474KBFN#   |
| 158 | 1.35                | 50                  | X7R | 680nF       | ±10%                  | CL21B684KBFN#   |
| 159 | 1.35                | 100                 | X7R | 22nF        | ±10%                  | CL21B223KCFN#   |
| 160 | 1.35                | 100                 | X7R | 33nF        | ±10%                  | CL21B333KCFN#   |
| 161 | 1.35                | 100                 | X7R | 47nF        | ±10%                  | CL21B473KCFN#   |
| 162 | 1.35                | 100                 | X7R | 68nF        | ±10%                  | CL21B683KCFN#   |
| 163 | 1.35                | 100                 | X7R | 100nF       | ±10%                  | CL21B104KCFN#   |
| 164 | 1.35                | 100                 | X7R | 100nF       | ±10%                  | CL21B104KCFN#   |
| 165 | 1.35                | 100                 | X7R | 220nF       | ±10%                  | CL21B224KCFN#   |
| 166 | 1.35                | 250                 | X7R | 4.7nF       | ±10%                  | CL21B472KEFN#   |
| 167 | 1.35                | 250                 | X7R | 10nF        | ±10%                  | CL21B103KEFN#   |
| 168 | 1.40                | 6.3                 | X7R | 10uF        | ±10%                  | CL21B106KQQFN#  |
| 169 | 1.40                | 6.3                 | X7R | 10uF        | ±10%                  | CL21B106KQQFN#  |
| 170 | 1.40                | 10                  | X7R | 10uF        | ±10%                  | CL21B106KPQFN#  |
| 171 | 1.40                | 10                  | X7R | 10uF        | ±10%                  | CL21B106KPQFN#  |
| 172 | 1.40                | 16                  | X7R | 10uF        | ±10%                  | CL21B106KQQFN#  |
| 173 | 1.40                | 16                  | X7R | 10uF        | ±10%                  | CL21B106KQQFN#  |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 1206/3216

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 1.00                | 10                  | X7R | 1.2uF       | ±10%                  | CL31B125KPCNNN# |
| 2   | 1.00                | 16                  | X7R | 330nF       | ±10%                  | CL31B334KOCNNN# |
| 3   | 1.00                | 16                  | X7R | 470nF       | ±10%                  | CL31B474KOCNNN# |
| 4   | 1.00                | 16                  | X7R | 680nF       | ±10%                  | CL31B684KOCNNN# |
| 5   | 1.00                | 25                  | X7R | 220nF       | ±10%                  | CL31B224KACNFN# |
| 6   | 1.00                | 25                  | X7R | 220nF       | ±10%                  | CL31B224KACNNN# |
| 7   | 1.00                | 25                  | X7R | 330nF       | ±10%                  | CL31B334KACNNN# |
| 8   | 1.00                | 50                  | X7R | 1nF         | ±10%                  | CL31B102KBCNNN# |
| 9   | 1.00                | 50                  | X7R | 1.5nF       | ±10%                  | CL31B152KBCNNN# |
| 10  | 1.00                | 50                  | X7R | 2.7nF       | ±10%                  | CL31B272KBCNNN# |
| 11  | 1.00                | 50                  | X7R | 3.3nF       | ±10%                  | CL31B332KBCNNN# |
| 12  | 1.00                | 50                  | X7R | 6.8nF       | ±10%                  | CL31B682KBCNNN# |
| 13  | 1.00                | 50                  | X7R | 8.2nF       | ±10%                  | CL31B822KBCNNN# |
| 14  | 1.00                | 50                  | X7R | 10nF        | ±10%                  | CL31B103KBCNFN# |
| 15  | 1.00                | 50                  | X7R | 10nF        | ±20%                  | CL31B103MBCNNN# |
| 16  | 1.00                | 50                  | X7R | 33nF        | ±5%                   | CL31B333JBCNNN# |
| 17  | 1.00                | 50                  | X7R | 47nF        | ±10%                  | CL31B473KBCNNN# |
| 18  | 1.00                | 50                  | X7R | 47nF        | ±5%                   | CL31B473JBCNNN# |
| 19  | 1.00                | 50                  | X7R | 68nF        | ±10%                  | CL31B683KBCNNN# |
| 20  | 1.00                | 50                  | X7R | 100nF       | ±10%                  | CL31B104KBCNFN# |
| 21  | 1.00                | 50                  | X7R | 100nF       | ±10%                  | CL31B104KBCNNN# |
| 22  | 1.00                | 50                  | X7R | 100nF       | ±20%                  | CL31B104MBCNNN# |
| 23  | 1.00                | 50                  | X7R | 150nF       | ±10%                  | CL31B154KBCNNN# |
| 24  | 1.00                | 50                  | X7R | 220pF       | ±10%                  | CL31B221KBCNNN# |
| 25  | 1.00                | 50                  | X7R | 330pF       | ±10%                  | CL31B331KBCNNN# |
| 26  | 1.00                | 50                  | X7R | 390pF       | ±5%                   | CL31B391JBCNNN# |
| 27  | 1.00                | 50                  | X7R | 560pF       | ±10%                  | CL31B561KBCNNN# |
| 28  | 1.00                | 50                  | X7R | 680pF       | ±10%                  | CL31B681KBCNNN# |
| 29  | 1.00                | 100                 | X7R | 2.2nF       | ±10%                  | CL31B222KCCNNN# |
| 30  | 1.00                | 100                 | X7R | 3.3nF       | ±10%                  | CL31B332KCCNNN# |
| 31  | 1.00                | 100                 | X7R | 10nF        | ±10%                  | CL31B103KCCNFN# |
| 32  | 1.00                | 100                 | X7R | 15nF        | ±10%                  | CL31B153KCCNNN# |
| 33  | 1.00                | 100                 | X7R | 22nF        | ±10%                  | CL31B223KCCNFN# |
| 34  | 1.00                | 100                 | X7R | 22nF        | ±10%                  | CL31B223KCCNNN# |
| 35  | 1.00                | 100                 | X7R | 33nF        | ±10%                  | CL31B333KCCNNN# |
| 36  | 1.00                | 200                 | X7R | 1nF         | ±10%                  | CL31B102KDCNNN# |
| 37  | 1.00                | 200                 | X7R | 2.2nF       | ±10%                  | CL31B222KDCNFN# |
| 38  | 1.00                | 200                 | X7R | 10nF        | ±10%                  | CL31B103KDCNFN# |
| 39  | 1.00                | 200                 | X7R | 470pF       | ±10%                  | CL31B471KDCNNN# |
| 40  | 1.25                | 25                  | X7R | 1uF         | ±10%                  | CL31B105KAPLNN# |
| 41  | 1.25                | 350                 | X7R | 33nF        | ±10%                  | CL31B333KFESNN# |
| 42  | 1.40                | 16                  | X7R | 1uF         | ±10%                  | CL31B105KOFNFN# |
| 43  | 1.40                | 16                  | X7R | 1uF         | ±10%                  | CL31B105KOFNNN# |
| 44  | 1.40                | 16                  | X7R | 1uF         | ±20%                  | CL31B105MOFNNN# |
| 45  | 1.40                | 16                  | X7R | 1.5uF       | ±10%                  | CL31B155KOFNNN# |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 1206/3216

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 46  | 1.40                | 50                  | X7R | 220nF       | ±10%                  | CL31B224KBFNFN# |
| 47  | 1.40                | 50                  | X7R | 220nF       | ±10%                  | CL31B224KBFNNN# |
| 48  | 1.40                | 50                  | X7R | 220nF       | ±20%                  | CL31B224MBFNNN# |
| 49  | 1.40                | 50                  | X7R | 270nF       | ±10%                  | CL31B274KBFNNN# |
| 50  | 1.40                | 50                  | X7R | 330nF       | ±10%                  | CL31B334KBFNFN# |
| 51  | 1.40                | 50                  | X7R | 330nF       | ±10%                  | CL31B334KBFNNN# |
| 52  | 1.40                | 50                  | X7R | 330nF       | ±5%                   | CL31B334JBFNNN# |
| 53  | 1.40                | 100                 | X7R | 100nF       | ±10%                  | CL31B104KCFNFN# |
| 54  | 1.40                | 100                 | X7R | 100nF       | ±10%                  | CL31B104KCFNNN# |
| 55  | 1.40                | 100                 | X7R | 100nF       | ±5%                   | CL31B104JCFNNN# |
| 56  | 1.40                | 200                 | X7R | 33nF        | ±10%                  | CL31B333KDFNNN# |
| 57  | 1.40                | 500                 | X7R | 1nF         | ±10%                  | CL31B102KGFNFN# |
| 58  | 1.40                | 500                 | X7R | 1nF         | ±10%                  | CL31B102KGFNNN# |
| 59  | 1.40                | 500                 | X7R | 1.5nF       | ±10%                  | CL31B152KGFNFN# |
| 60  | 1.40                | 500                 | X7R | 1.5nF       | ±10%                  | CL31B152KGFNNN# |
| 61  | 1.40                | 500                 | X7R | 2.2nF       | ±10%                  | CL31B222KGFNFN# |
| 62  | 1.40                | 500                 | X7R | 3.3nF       | ±10%                  | CL31B332KGFNFN# |
| 63  | 1.40                | 500                 | X7R | 4.7nF       | ±10%                  | CL31B472KGFNFN# |
| 64  | 1.40                | 500                 | X7R | 6.8nF       | ±10%                  | CL31B682KGFNNN# |
| 65  | 1.40                | 500                 | X7R | 10nF        | ±10%                  | CL31B103KGFNFN# |
| 66  | 1.40                | 500                 | X7R | 220pF       | ±10%                  | CL31B221KGFNNN# |
| 67  | 1.40                | 500                 | X7R | 470pF       | ±10%                  | CL31B471KGFNNN# |
| 68  | 1.40                | 500                 | X7R | 680pF       | ±10%                  | CL31B681KGFNNN# |
| 69  | 1.40                | 630                 | X7R | 1nF         | ±10%                  | CL31B102KHFNFN# |
| 70  | 1.40                | 630                 | X7R | 1nF         | ±10%                  | CL31B102KHFSFN# |
| 71  | 1.40                | 630                 | X7R | 1.5nF       | ±10%                  | CL31B152KHFNFN# |
| 72  | 1.40                | 630                 | X7R | 2.2nF       | ±10%                  | CL31B222KHFNFN# |
| 73  | 1.40                | 630                 | X7R | 2.2nF       | ±10%                  | CL31B222KHFSFN# |
| 74  | 1.40                | 630                 | X7R | 3.3nF       | ±10%                  | CL31B332KHFSFN# |
| 75  | 1.40                | 630                 | X7R | 4.7nF       | ±10%                  | CL31B472KHFNFN# |
| 76  | 1.40                | 630                 | X7R | 4.7nF       | ±10%                  | CL31B472KHFNNN# |
| 77  | 1.40                | 630                 | X7R | 4.7nF       | ±10%                  | CL31B472KHFSFN# |
| 78  | 1.40                | 630                 | X7R | 6.8nF       | ±10%                  | CL31B682KHFNFN# |
| 79  | 1.40                | 630                 | X7R | 10nF        | ±10%                  | CL31B103KHFNFN# |
| 80  | 1.40                | 630                 | X7R | 10nF        | ±10%                  | CL31B103KHFNNN# |
| 81  | 1.40                | 630                 | X7R | 10nF        | ±10%                  | CL31B103KHFSFN# |
| 82  | 1.40                | 630                 | X7R | 330pF       | ±10%                  | CL31B331KHFNNN# |
| 83  | 1.40                | 630                 | X7R | 470pF       | ±10%                  | CL31B471KHFNNN# |
| 84  | 1.40                | 630                 | X7R | 680pF       | ±10%                  | CL31B681KHFNNN# |
| 85  | 1.40                | 1000                | X7R | 1nF         | ±10%                  | CL31B102KIFNFN# |
| 86  | 1.40                | 1000                | X7R | 1nF         | ±10%                  | CL31B102KIFNNN# |
| 87  | 1.40                | 1000                | X7R | 1.5nF       | ±10%                  | CL31B152KIFNFN# |
| 88  | 1.40                | 1000                | X7R | 2.2nF       | ±10%                  | CL31B222KIFNFN# |
| 89  | 1.40                | 1000                | X7R | 2.2nF       | ±10%                  | CL31B222KIFNNN# |
| 90  | 1.40                | 1000                | X7R | 680pF       | ±10%                  | CL31B681KIFNNN# |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 1206/3216

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number      |
|-----|---------------------|---------------------|-----|-------------|-----------------------|------------------|
| 91  | 1.80                | 6.3                 | X7R | 10uF        | ±10%                  | CL31B106KQHNFN#  |
| 92  | 1.80                | 6.3                 | X7R | 10uF        | ±10%                  | CL31B106KQHNNN#  |
| 93  | 1.80                | 6.3                 | X7R | 22uF        | ±10%                  | CL31B226KQHNNN#  |
| 94  | 1.80                | 10                  | X7R | 4.7uF       | ±10%                  | CL31B475KPHNFN#  |
| 95  | 1.80                | 10                  | X7R | 4.7uF       | ±10%                  | CL31B475KPHNNN#  |
| 96  | 1.80                | 10                  | X7R | 10uF        | ±10%                  | CL31B106KPHN3N#  |
| 97  | 1.80                | 10                  | X7R | 10uF        | ±10%                  | CL31B106KPHNFN#  |
| 98  | 1.80                | 10                  | X7R | 10uF        | ±10%                  | CL31B106KPHNNN#  |
| 99  | 1.80                | 10                  | X7R | 22uF        | ±10%                  | CL31B226KPHNFN#  |
| 100 | 1.80                | 10                  | X7R | 22uF        | ±10%                  | CL31B226KPHNNN#  |
| 101 | 1.80                | 10                  | X7R | 22uF        | ±20%                  | CL31B226MPHNNN#  |
| 102 | 1.80                | 16                  | X7R | 2.2uF       | ±10%                  | CL31B225KOHNFN#  |
| 103 | 1.80                | 16                  | X7R | 2.2uF       | ±10%                  | CL31B225KOHNNN#  |
| 104 | 1.80                | 16                  | X7R | 2.2uF       | ±20%                  | CL31B225MOHNNN#  |
| 105 | 1.80                | 16                  | X7R | 3.3uF       | ±10%                  | CL31B335KOHNFN#  |
| 106 | 1.80                | 16                  | X7R | 3.3uF       | ±10%                  | CL31B335KOHNNN#  |
| 107 | 1.80                | 16                  | X7R | 4.7uF       | ±10%                  | CL31B475KOHNFN#  |
| 108 | 1.80                | 16                  | X7R | 4.7uF       | ±10%                  | CL31B475KOHNNN#  |
| 109 | 1.80                | 16                  | X7R | 10uF        | ±10%                  | CL31B106KOHNFN#  |
| 110 | 1.80                | 16                  | X7R | 10uF        | ±10%                  | CL31B106KOHNNN#  |
| 111 | 1.80                | 16                  | X7R | 10uF        | ±10%                  | CL31B106KOHZFN#  |
| 112 | 1.80                | 16                  | X7R | 10uF        | ±20%                  | CL31B106MOHNNN#  |
| 113 | 1.80                | 25                  | X7R | 1uF         | ±10%                  | CL31B105KAHNFN#  |
| 114 | 1.80                | 25                  | X7R | 1uF         | ±10%                  | CL31B105KAHNNN#  |
| 115 | 1.80                | 25                  | X7R | 1uF         | ±20%                  | CL31B105MAHNNN#  |
| 116 | 1.80                | 25                  | X7R | 1uF         | ±5%                   | CL31B105JAHNNN#  |
| 117 | 1.80                | 25                  | X7R | 2.2uF       | ±10%                  | CL31B225KAHNFN#  |
| 118 | 1.80                | 25                  | X7R | 2.2uF       | ±10%                  | CL31B225KAHNNN#  |
| 119 | 1.80                | 25                  | X7R | 4.7uF       | ±10%                  | CL31B475KAHNFN#  |
| 120 | 1.80                | 25                  | X7R | 4.7uF       | ±10%                  | CL31B475KAHNNN#  |
| 121 | 1.80                | 25                  | X7R | 10uF        | ±10%                  | CL31B106KAHNFN#  |
| 122 | 1.80                | 25                  | X7R | 10uF        | ±10%                  | CL31B106KAHNNN#  |
| 123 | 1.80                | 25                  | X7R | 10uF        | ±10%                  | CL31B106KAHSFN#  |
| 124 | 1.80                | 25                  | X7R | 680nF       | ±10%                  | CL31B684KAHNNN#  |
| 125 | 1.80                | 35                  | X7R | 10uF        | ±10%                  | CL31B106KLHNFN#  |
| 126 | 1.80                | 35                  | X7R | 10uF        | ±10%                  | CL31B106KLHNNN#  |
| 127 | 1.80                | 35                  | X7R | 10uF        | ±10%                  | CL31B106KLHSFN#  |
| 128 | 1.80                | 50                  | X7R | 1uF         | ±10%                  | CL31B105KBHNFN#  |
| 129 | 1.80                | 50                  | X7R | 1uF         | ±10%                  | CL31B105KBHNNN#  |
| 130 | 1.80                | 50                  | X7R | 1uF         | ±10%                  | CL31B105KBHSNN#  |
| 131 | 1.80                | 50                  | X7R | 2.2uF       | ±10%                  | CL31B225KBHNFN#  |
| 132 | 1.80                | 50                  | X7R | 2.2uF       | ±10%                  | CL31B225KBHNNN#  |
| 133 | 1.80                | 50                  | X7R | 4.7uF       | ±10%                  | CL31B475KBHNN3N# |
| 134 | 1.80                | 50                  | X7R | 4.7uF       | ±10%                  | CL31B475KBHNFN#  |
| 135 | 1.80                | 50                  | X7R | 4.7uF       | ±10%                  | CL31B475KBHNNN#  |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 1206/3216

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 136 | 1.80                | 50                  | X7R | 4.7uF       | ±10%                  | CL31B475KBHZFN# |
| 137 | 1.80                | 50                  | X7R | 10uF        | ±10%                  | CL31B106KBHNFN# |
| 138 | 1.80                | 50                  | X7R | 10uF        | ±10%                  | CL31B106KBHNNN# |
| 139 | 1.80                | 50                  | X7R | 470nF       | ±10%                  | CL31B474KBHNFN# |
| 140 | 1.80                | 50                  | X7R | 470nF       | ±10%                  | CL31B474KBHNNN# |
| 141 | 1.80                | 50                  | X7R | 470nF       | ±20%                  | CL31B474MBHNNN# |
| 142 | 1.80                | 100                 | X7R | 1uF         | ±10%                  | CL31B105KCHNFN# |
| 143 | 1.80                | 100                 | X7R | 1uF         | ±10%                  | CL31B105KCHNNN# |
| 144 | 1.80                | 100                 | X7R | 1uF         | ±10%                  | CL31B105KCHSFN# |
| 145 | 1.80                | 100                 | X7R | 1uF         | ±10%                  | CL31B105KCHSNN# |
| 146 | 1.80                | 100                 | X7R | 2.2uF       | ±10%                  | CL31B225KCHSFN# |
| 147 | 1.80                | 100                 | X7R | 2.2uF       | ±10%                  | CL31B225KCHSNN# |
| 148 | 1.80                | 100                 | X7R | 470nF       | ±10%                  | CL31B474KCHSFN# |
| 149 | 1.80                | 200                 | X7R | 100nF       | ±10%                  | CL31B104KDHNFN# |
| 150 | 1.80                | 250                 | X7R | 33nF        | ±10%                  | CL31B333KEHNNN# |
| 151 | 1.80                | 250                 | X7R | 47nF        | ±10%                  | CL31B473KEHNNN# |
| 152 | 1.80                | 250                 | X7R | 47nF        | ±10%                  | CL31B473KEHSFN# |
| 153 | 1.80                | 250                 | X7R | 100nF       | ±10%                  | CL31B104KEHNFN# |
| 154 | 1.80                | 250                 | X7R | 100nF       | ±10%                  | CL31B104KEHNNN# |
| 155 | 1.80                | 250                 | X7R | 100nF       | ±10%                  | CL31B104KEHSFN# |
| 156 | 1.80                | 500                 | X7R | 22nF        | ±10%                  | CL31B223KGHNNN# |
| 157 | 1.80                | 500                 | X7R | 33nF        | ±10%                  | CL31B333KGHNFN# |
| 158 | 1.80                | 500                 | X7R | 33nF        | ±10%                  | CL31B333KGHNNN# |
| 159 | 1.80                | 630                 | X7R | 22nF        | ±10%                  | CL31B223KHNNFN# |
| 160 | 1.80                | 630                 | X7R | 22nF        | ±10%                  | CL31B223KHNNNN# |
| 161 | 1.80                | 630                 | X7R | 22nF        | ±10%                  | CL31B223KHHSFN# |
| 162 | 1.80                | 630                 | X7R | 33nF        | ±10%                  | CL31B333KHNNFN# |
| 163 | 1.80                | 630                 | X7R | 33nF        | ±10%                  | CL31B333KHHSFN# |
| 164 | 1.80                | 2000                | X7R | 1nF         | ±10%                  | CL31B102KJHNNN# |



# Normal Capacitors\_Standard

Size Code (inch/mm) : 1210/3225

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 1.45                | 25                  | X7R | 1uF         | ±10%                  | CL32B105KAFNNN# |
| 2   | 1.45                | 50                  | X7R | 150nF       | ±10%                  | CL32B154KBFNNN# |
| 3   | 1.45                | 50                  | X7R | 470nF       | ±10%                  | CL32B474KBFNNN# |
| 4   | 1.45                | 500                 | X7R | 10nF        | ±10%                  | CL32B103KGFNNN# |
| 5   | 1.80                | 50                  | X7R | 1uF         | ±10%                  | CL32B105KBHNNN# |
| 6   | 1.80                | 50                  | X7R | 1uF         | ±20%                  | CL32B105MBHNNN# |
| 7   | 2.00                | 16                  | X7R | 10uF        | ±10%                  | CL32B106KOULNN# |
| 8   | 2.00                | 25                  | X7R | 10uF        | ±10%                  | CL32B106KAUL3N# |
| 9   | 2.00                | 25                  | X7R | 10uF        | ±10%                  | CL32B106KAULNN# |
| 10  | 2.00                | 35                  | X7R | 10uF        | ±10%                  | CL32B106KLULNN# |
| 11  | 2.00                | 50                  | X7R | 4.7uF       | ±10%                  | CL32B475KBUYFN# |
| 12  | 2.00                | 50                  | X7R | 4.7uF       | ±10%                  | CL32B475KBUYNN# |
| 13  | 2.20                | 10                  | X7R | 10uF        | ±10%                  | CL32B106KPINNN# |
| 14  | 2.20                | 25                  | X7R | 2.2uF       | ±10%                  | CL32B225KAINNN# |
| 15  | 2.70                | 10                  | X7R | 22uF        | ±10%                  | CL32B226KPJNNN# |
| 16  | 2.70                | 10                  | X7R | 47uF        | ±10%                  | CL32B476KPJNNN# |
| 17  | 2.70                | 10                  | X7R | 47uF        | ±20%                  | CL32B476MPJNNN# |
| 18  | 2.70                | 100                 | X7R | 1uF         | ±10%                  | CL32B105KCJNNN# |
| 19  | 2.70                | 100                 | X7R | 1uF         | ±10%                  | CL32B105KCJSNN# |
| 20  | 2.70                | 100                 | X7R | 2.2uF       | ±10%                  | CL32B225KCJSFN# |
| 21  | 2.70                | 100                 | X7R | 2.2uF       | ±10%                  | CL32B225KCJSNN# |
| 22  | 2.70                | 16                  | X7R | 10uF        | ±10%                  | CL32B106KOJNNN# |
| 23  | 2.70                | 16                  | X7R | 22uF        | ±10%                  | CL32B226KOJNFN# |
| 24  | 2.70                | 16                  | X7R | 22uF        | ±10%                  | CL32B226KOJNNN# |
| 25  | 2.70                | 16                  | X7R | 22uF        | ±20%                  | CL32B226MOJNNN# |
| 26  | 2.70                | 25                  | X7R | 10uF        | ±10%                  | CL32B106KAJNFN# |
| 27  | 2.70                | 25                  | X7R | 10uF        | ±10%                  | CL32B106KAJNNN# |
| 28  | 2.70                | 25                  | X7R | 22uF        | ±10%                  | CL32B226KAJNFN# |
| 29  | 2.70                | 25                  | X7R | 22uF        | ±10%                  | CL32B226KAJNNN# |
| 30  | 2.70                | 250                 | X7R | 100nF       | ±10%                  | CL32B104KEJNNN# |
| 31  | 2.70                | 35                  | X7R | 10uF        | ±10%                  | CL32B106KLJNNN# |
| 32  | 2.70                | 50                  | X7R | 2.2uF       | ±10%                  | CL32B225KBJNNN# |
| 33  | 2.70                | 50                  | X7R | 4.7uF       | ±10%                  | CL32B475KBJN3N# |
| 34  | 2.70                | 50                  | X7R | 4.7uF       | ±10%                  | CL32B475KBJNFN# |
| 35  | 2.70                | 50                  | X7R | 4.7uF       | ±10%                  | CL32B475KBJNNN# |
| 36  | 2.70                | 50                  | X7R | 10uF        | ±10%                  | CL32B106KBJNFN# |
| 37  | 2.70                | 50                  | X7R | 10uF        | ±10%                  | CL32B106KBJNNN# |
| 38  | 2.70                | 6.3                 | X7R | 47uF        | ±20%                  | CL32B476MQJNNN# |
| 39  | 2.80                | 50                  | X7R | 4.7uF       | ±10%                  | CL32B475KBVZNN# |



# Normal Capacitors\_Standard

## Product Lineup (X7S)

Size Code (inch/mm) : 0201/0603

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 0.33                | 10                  | X7S | 100nF       | ±10%                  | CL03Y104KP3NNN# |
| 2   | 0.33                | 16                  | X7S | 100nF       | ±10%                  | CL03Y104K03NNN# |

Size Code (inch/mm) : 0603/1608

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 1.00                | 6.3                 | X7S | 10uF        | ±20%                  | CL10Y106MQ8NFR# |

Size Code (inch/mm) : 0805/2012

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 1.35                | 25                  | X7S | 4.7uF       | ±10%                  | CL21Y475KAFNNN# |

## Product Lineup (X7T)

Size Code (inch/mm) : 0201/0603

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 0.33                | 6.3                 | X7T | 220nF       | ±10%                  | CL03Z224KQ3NNN# |

Size Code (inch/mm) : 0402/1005

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 0.70                | 4                   | X7T | 10uF        | ±20%                  | CL05Z106MR5NUN# |

Size Code (inch/mm) : 0805/2012

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 1.40                | 6.3                 | X7T | 22uF        | ±20%                  | CL21Z226MQQNNN# |
| 2   | 1.45                | 25                  | X7T | 10uF        | ±10%                  | CL21Z106KAYQNN# |



# Normal Capacitors\_Standard

## Product Lineup (X7R(S) (DC Bias 0.5vr TCC))

Size Code (inch/mm) : 0603/1608

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC                           | Capacitance | Capacitance Tolerance | Part Number     | Remarks |
|-----|---------------------|---------------------|-------------------------------|-------------|-----------------------|-----------------|---------|
| 1   | 1.00                | 16                  | X7R(S)<br>(DC Bias 0.5vr TCC) | 10uF        | ±20%                  | CL10K106M08NRN# |         |

Size Code (inch/mm) : 0805/2012

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC                           | Capacitance | Capacitance Tolerance | Part Number     | Remarks |
|-----|---------------------|---------------------|-------------------------------|-------------|-----------------------|-----------------|---------|
| 1   | 1.45                | 25                  | X7R(S)<br>(DC Bias 0.5vr TCC) | 10uF        | ±10%                  | CL21K106KAYQNN# |         |

Size Code (inch/mm) : 0805/2012

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC                           | Capacitance | Capacitance Tolerance | Part Number     | Remarks       |
|-----|---------------------|---------------------|-------------------------------|-------------|-----------------------|-----------------|---------------|
| 1   | 1.45                | 25                  | X7R(S)<br>(DC Bias 0.5vr TCC) | 10uF        | ±10%                  | CL21K106KAY6NN# | Normal(Epoxy) |

## Product Lineup (X7S)

Size Code (inch/mm) : 1206/3216

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     | Remarks       |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|---------------|
| 1   | 1.90                | 100                 | X7S | 4.7uF       | ±10%                  | CL31Y475KCK6NN# | Normal(Epoxy) |

# Normal Capacitors\_High Level I

Normal High Level I

## Features

- A High level I MLCC is a chip-type capacitor suitable for industrial applications, with greater reliability than a general MLCC
- It has improved the moisture resistance characteristics.
- In the outgoing inspection, proceed with the bending strength evaluation strengthen.



- ① Ceramic Body
- ② Electrode (Ni/Cu\*)
- ③ Plating (Ni)
- ④ Termination (Cu or Cu+Metal Epoxy)
- ⑤ Plating (Sn)

High Level I

Improved Reliability  
(65°C, 90%RH, 1Vr, 500H)

High Level II

Reinforced Reliability  
(85°C, 85%RH, 1Vr, 1000H)

\* Internal Cu electrode is only applied to limited products.

## Application

- Server, Network, Base station, Solar Inverter, DC-DC Converter

## Structure and Dimensions



| Size Code | Dimension (mm) |           |           |              | EIA (inch) |
|-----------|----------------|-----------|-----------|--------------|------------|
|           | L              | W         | T         | BW           |            |
| 03        | 0.60±0.03      | 0.30±0.03 | 0.30±0.03 | 0.15±0.05    | 0603       |
|           | 0.60±0.09      | 0.30±0.09 | 0.30±0.09 |              |            |
| 05        | 1.00±0.05      | 0.50±0.05 | 0.50±0.05 | 0.25±0.10    | 0402       |
|           | 1.00±0.10      | 0.50±0.10 | 0.50±0.10 |              |            |
|           | 1.00±0.15      | 0.50±0.15 | 0.50±0.15 |              |            |
|           | 1.00±0.20      | 0.50±0.20 | 0.50±0.20 |              |            |
| 10        | 1.60±0.10      | 0.80±0.10 | 0.80±0.10 | 0.30±0.20    | 0603       |
|           | 1.60±0.15      | 0.80±0.15 | 0.80±0.15 |              |            |
|           | 1.60±0.20      | 0.80±0.20 | 0.80±0.20 |              |            |
|           | 1.60±0.25      | 0.80±0.25 | 0.80±0.25 |              |            |
| 21        | 2.00±0.10      | 1.25±0.10 | 0.65±0.10 | 0.5+0.2/-0.3 | 0805       |
|           | 2.00±0.10      | 1.25±0.10 | 0.85±0.10 |              |            |
|           | 2.00±0.10      | 1.25±0.10 | 1.25±0.10 |              |            |
|           | 2.00±0.15      | 1.25±0.15 | 1.25±0.15 |              |            |
| 31        | 3.20±0.15      | 1.60±0.15 | 0.85±0.15 | 0.50±0.30    | 1206       |
|           | 3.20±0.15      | 1.60±0.15 | 1.25±0.15 |              |            |
|           | 3.20±0.20      | 1.60±0.20 | 1.60±0.20 |              |            |
|           | 3.20±0.30      | 1.60±0.20 | 1.60±0.20 |              |            |
| 32        | 3.20±0.30      | 1.60±0.30 | 1.60±0.30 | 0.60±0.30    | 1210       |
|           | 3.20±0.30      | 2.50±0.20 | 1.80±0.20 |              |            |
|           | 3.20±0.30      | 2.50±0.20 | 2.00±0.20 |              |            |
|           | 3.20±0.40      | 2.50±0.30 | 2.50±0.30 |              |            |



# Normal Capacitors\_High Level I

## Capacitance Table (COG)

| Category     | TCC         | Size Code (inch/mm) | Rated Voltage (Vdc) | Capacitance |   |    |     |   |    |     |   |    | Capacitance Range |     |   |              |               |
|--------------|-------------|---------------------|---------------------|-------------|---|----|-----|---|----|-----|---|----|-------------------|-----|---|--------------|---------------|
|              |             |                     |                     | pF          |   |    | nF  |   |    | uF  |   |    |                   |     |   |              |               |
|              |             |                     |                     | 0.1         | 1 | 10 | 100 | 1 | 10 | 100 | 1 | 10 |                   | 100 |   |              |               |
| High Level I | COG (125°C) | 008004/0201         | 16                  | ■           | ■ | ■  |     |   |    |     |   |    |                   |     |   | 0.2pF - 10pF |               |
|              |             |                     | 25                  | ■           | ■ | ■  |     |   |    |     |   |    |                   |     |   |              | 0.2pF - 10pF  |
|              |             | 01005/0402          | 6.3                 |             |   |    | ■   |   |    |     |   |    |                   |     |   |              | 100pF - 100pF |
|              |             |                     | 16                  |             |   |    | ■   | ■ |    |     |   |    |                   |     |   |              | 10pF - 100pF  |
|              |             |                     | 25                  |             |   |    | ■   | ■ |    |     |   |    |                   |     |   |              | 10pF - 100pF  |
|              |             | 0201/0603           | 50                  |             |   |    | ■   |   |    |     |   |    |                   |     |   |              | 100pF - 100pF |
|              |             |                     | 25                  | ■           | ■ | ■  | ■   |   |    |     |   |    |                   |     |   |              | 0.2pF - 100pF |
|              |             | 0402/1005           | 50                  | ■           | ■ | ■  | ■   |   |    |     |   |    |                   |     |   |              | 0.5pF - 47pF  |
|              |             |                     | 16                  |             |   |    | ■   | ■ | ■  |     |   |    |                   |     |   |              | 27pF - 1nF    |
|              |             | 0603/1608           | 25                  | ■           | ■ | ■  | ■   |   |    |     |   |    |                   |     |   |              | 0.1pF - 1nF   |
|              |             |                     | 50                  | ■           | ■ | ■  | ■   |   |    |     |   |    |                   |     |   |              | 0.1pF - 1nF   |
|              |             |                     | 100                 |             |   |    | ■   | ■ | ■  |     |   |    |                   |     |   |              | 12pF - 220pF  |
|              |             | 0805/2012           | 16                  |             |   |    |     |   |    | ■   |   |    |                   |     |   |              | 1nF - 2.2nF   |
|              |             |                     | 25                  |             |   |    |     |   |    | ■   | ■ |    |                   |     |   |              | 560pF - 10nF  |
|              |             |                     | 50                  |             |   |    |     |   |    | ■   | ■ | ■  |                   |     |   |              | 1pF - 5.6nF   |
|              |             |                     | 100                 |             |   |    |     |   |    | ■   | ■ | ■  |                   |     |   |              | 1.2pF - 4.7nF |
|              |             |                     | 200                 |             |   |    |     |   |    |     |   | ■  |                   |     |   |              | 220pF - 220pF |
|              |             | 1206/3216           | 250                 |             |   |    |     |   |    |     |   | ■  |                   |     |   |              | 470pF - 470pF |
|              |             |                     | 25                  |             |   |    |     |   |    |     |   | ■  | ■                 |     |   |              | 3.3nF - 10nF  |
|              |             |                     | 50                  |             |   |    |     |   |    |     |   | ■  | ■                 |     |   |              | 10pF - 15nF   |
|              |             |                     | 100                 |             |   |    |     |   |    |     |   | ■  | ■                 |     |   |              | 12pF - 3.9nF  |
|              |             |                     | 200                 |             |   |    |     |   |    |     |   | ■  | ■                 |     |   |              | 18pF - 1nF    |
|              |             | 1210/3225           | 250                 |             |   |    |     |   |    |     |   | ■  | ■                 |     |   |              | 10pF - 2.2nF  |
|              |             |                     | 630                 |             |   |    |     |   |    |     |   | ■  | ■                 |     |   |              | 10pF - 470pF  |
|              |             |                     | 16                  |             |   |    |     |   |    |     |   |    |                   | ■   | ■ |              | 15nF - 120nF  |
|              |             |                     | 25                  |             |   |    |     |   |    |     |   |    |                   | ■   | ■ |              | 10nF - 100nF  |
|              |             |                     | 50                  |             |   |    |     |   |    |     |   |    |                   | ■   | ■ |              | 10pF - 100nF  |
|              |             |                     | 100                 |             |   |    |     |   |    |     |   |    |                   | ■   | ■ |              | 20pF - 33nF   |
|              |             |                     | 200                 |             |   |    |     |   |    |     |   |    |                   | ■   | ■ |              | 68pF - 1nF    |
|              |             |                     | 250                 |             |   |    |     |   |    |     |   |    |                   | ■   | ■ |              | 2.2nF - 8.2nF |
|              |             |                     | 500                 |             |   |    |     |   |    |     |   |    |                   | ■   | ■ |              | 10pF - 2.2nF  |
|              |             | 630                 |                     |             |   |    |     |   |    |     |   |    | ■                 | ■   |   | 10pF - 10nF  |               |
|              |             | 1210/3225           | 1000                |             |   |    |     |   |    |     |   |    |                   | ■   | ■ |              | 10pF - 1nF    |
|              |             |                     | 2000                |             |   |    |     |   |    |     |   |    |                   | ■   | ■ |              | 15pF - 100pF  |
|              |             |                     | 25                  |             |   |    |     |   |    |     |   |    |                   |     |   | ■            | 10nF - 10nF   |
|              |             |                     | 50                  |             |   |    |     |   |    |     |   |    |                   |     |   | ■            | 1.8nF - 22nF  |
|              |             |                     | 100                 |             |   |    |     |   |    |     |   |    |                   |     |   | ■            | 33nF - 47nF   |
|              |             |                     | 500                 |             |   |    |     |   |    |     |   |    |                   |     |   | ■            | 680pF - 1.8nF |
|              |             | 1210/3225           | 630                 |             |   |    |     |   |    |     |   |    |                   |     |   | ■            | 8.2nF - 33nF  |
|              |             |                     | 1000                |             |   |    |     |   |    |     |   |    |                   |     |   | ■            | 10nF - 22nF   |
|              |             |                     | 2000                |             |   |    |     |   |    |     |   |    |                   |     |   | ■            | 100pF - 100pF |
|              |             |                     | 2000                |             |   |    |     |   |    |     |   |    |                   |     |   | ■            | 100pF - 100pF |







# Normal Capacitors\_High Level I

## Capacitance Table (X7R)

| Category     | TCC         | Size Code (inch/mm) | Rated Voltage (Vdc) | Capacitance |   |    |     |    |    |     |   |    |     |  |  | Capacitance Range |               |               |               |
|--------------|-------------|---------------------|---------------------|-------------|---|----|-----|----|----|-----|---|----|-----|--|--|-------------------|---------------|---------------|---------------|
|              |             |                     |                     | pF          |   |    |     | nF |    |     |   | uF |     |  |  |                   |               |               |               |
|              |             |                     |                     | 0.1         | 1 | 10 | 100 | 1  | 10 | 100 | 1 | 10 | 100 |  |  |                   |               |               |               |
| High Level I | X7R (125°C) | 01005/0402          | 10                  |             |   |    |     |    |    |     |   |    |     |  |  |                   | 100pF - 1nF   |               |               |
|              |             |                     | 16                  |             |   |    |     |    |    |     |   |    |     |  |  |                   |               | 330pF - 330pF |               |
|              |             | 0201/0603           | 6                   |             |   |    |     |    |    |     |   |    |     |  |  |                   |               |               | 1.5nF - 10nF  |
|              |             |                     | 10                  |             |   |    |     |    |    |     |   |    |     |  |  |                   |               |               | 330pF - 100nF |
|              |             |                     | 16                  |             |   |    |     |    |    |     |   |    |     |  |  |                   |               |               | 100pF - 10nF  |
|              |             | 0402/1005           | 25                  |             |   |    |     |    |    |     |   |    |     |  |  |                   |               |               | 100pF - 10nF  |
|              |             |                     | 4                   |             |   |    |     |    |    |     |   |    |     |  |  |                   |               |               | 1uF - 1uF     |
|              |             |                     | 6                   |             |   |    |     |    |    |     |   |    |     |  |  |                   |               |               | 1nF - 1uF     |
|              |             | 0603/1608           | 10                  |             |   |    |     |    |    |     |   |    |     |  |  |                   |               |               | 10nF - 470nF  |
|              |             |                     | 16                  |             |   |    |     |    |    |     |   |    |     |  |  |                   |               |               | 820pF - 220nF |
|              |             |                     | 25                  |             |   |    |     |    |    |     |   |    |     |  |  |                   |               |               | 220pF - 220nF |
|              |             |                     | 50                  |             |   |    |     |    |    |     |   |    |     |  |  |                   |               |               | 150pF - 100nF |
|              |             | 0805/2012           | 6                   |             |   |    |     |    |    |     |   |    |     |  |  |                   |               |               | 220nF - 4.7uF |
|              |             |                     | 10                  |             |   |    |     |    |    |     |   |    |     |  |  |                   |               |               | 5.6nF - 2.2uF |
|              |             |                     | 16                  |             |   |    |     |    |    |     |   |    |     |  |  |                   |               |               | 5.6nF - 1uF   |
|              |             |                     | 25                  |             |   |    |     |    |    |     |   |    |     |  |  |                   |               |               | 4.7nF - 1uF   |
|              |             |                     | 35                  |             |   |    |     |    |    |     |   |    |     |  |  |                   |               |               | 470nF - 470nF |
|              |             |                     | 50                  |             |   |    |     |    |    |     |   |    |     |  |  |                   |               |               | 100pF - 1uF   |
|              |             | 1206/3216           | 100                 |             |   |    |     |    |    |     |   |    |     |  |  |                   |               |               | 220pF - 100nF |
|              |             |                     | 6                   |             |   |    |     |    |    |     |   |    |     |  |  |                   |               |               | 2.2uF - 10uF  |
|              |             |                     | 10                  |             |   |    |     |    |    |     |   |    |     |  |  |                   |               |               | 220nF - 10uF  |
|              |             |                     | 16                  |             |   |    |     |    |    |     |   |    |     |  |  |                   |               |               | 100nF - 10uF  |
|              |             |                     | 25                  |             |   |    |     |    |    |     |   |    |     |  |  |                   |               |               | 1nF - 4.7uF   |
|              |             |                     | 50                  |             |   |    |     |    |    |     |   |    |     |  |  |                   |               |               | 100pF - 2.2uF |
|              |             |                     | 100                 |             |   |    |     |    |    |     |   |    |     |  |  |                   |               |               | 220pF - 470nF |
|              |             | 200                 |                     |             |   |    |     |    |    |     |   |    |     |  |  |                   |               | 150pF - 10nF  |               |
|              |             | 250                 |                     |             |   |    |     |    |    |     |   |    |     |  |  |                   |               |               | 1nF - 10nF    |
|              |             | 1206/3216           | 6                   |             |   |    |     |    |    |     |   |    |     |  |  |                   |               |               | 22uF - 22uF   |
|              |             |                     | 10                  |             |   |    |     |    |    |     |   |    |     |  |  |                   |               |               | 1uF - 22uF    |
|              |             |                     | 16                  |             |   |    |     |    |    |     |   |    |     |  |  |                   |               |               | 220nF - 10uF  |
|              |             |                     | 25                  |             |   |    |     |    |    |     |   |    |     |  |  |                   |               |               | 220nF - 10uF  |
|              |             |                     | 35                  |             |   |    |     |    |    |     |   |    |     |  |  |                   |               |               | 10uF - 10uF   |
| 50           |             |                     |                     |             |   |    |     |    |    |     |   |    |     |  |  |                   | 220pF - 10uF  |               |               |
| 100          |             |                     |                     |             |   |    |     |    |    |     |   |    |     |  |  |                   | 220pF - 2.2uF |               |               |
| 200          |             |                     |                     |             |   |    |     |    |    |     |   |    |     |  |  |                   |               | 470pF - 100nF |               |
| 250          |             |                     |                     |             |   |    |     |    |    |     |   |    |     |  |  |                   |               | 33nF - 100nF  |               |
| 350          |             |                     |                     |             |   |    |     |    |    |     |   |    |     |  |  |                   |               | 33nF - 33nF   |               |
| 500          |             |                     |                     |             |   |    |     |    |    |     |   |    |     |  |  |                   |               | 220pF - 33nF  |               |
| 630          |             |                     |                     |             |   |    |     |    |    |     |   |    |     |  |  |                   |               | 330pF - 33nF  |               |
| 1000         |             |                     |                     |             |   |    |     |    |    |     |   |    |     |  |  |                   | 680pF - 10nF  |               |               |
| 2000         |             |                     |                     |             |   |    |     |    |    |     |   |    |     |  |  |                   | 1nF - 1nF     |               |               |



# Normal Capacitors\_High Level I

| Category     | TCC         | Size Code (inch/mm) | Rated Voltage (Vdc) | Capacitance |   |    |     |   |    |     |   |    | Capacitance Range |               |               |               |
|--------------|-------------|---------------------|---------------------|-------------|---|----|-----|---|----|-----|---|----|-------------------|---------------|---------------|---------------|
|              |             |                     |                     | pF          |   |    | nF  |   |    | uF  |   |    |                   |               |               |               |
|              |             |                     |                     | 0.1         | 1 | 10 | 100 | 1 | 10 | 100 | 1 | 10 |                   | 100           |               |               |
| High Level I | X7R (125°C) | 1210/3225           | 6                   |             |   |    |     |   |    |     |   |    |                   |               | 47uF - 47uF   |               |
|              |             |                     | 10                  |             |   |    |     |   |    |     |   |    |                   |               |               | 10uF - 47uF   |
|              |             |                     | 16                  |             |   |    |     |   |    |     |   |    |                   |               |               | 2.2uF - 22uF  |
|              |             |                     | 25                  |             |   |    |     |   |    |     |   |    |                   |               |               | 1uF - 22uF    |
|              |             |                     | 35                  |             |   |    |     |   |    |     |   |    |                   |               |               | 10uF - 10uF   |
|              |             |                     | 50                  |             |   |    |     |   |    |     |   |    |                   |               |               | 150nF - 10uF  |
|              |             |                     | 100                 |             |   |    |     |   |    |     |   |    |                   |               |               | 220nF - 4.7uF |
|              |             |                     | 200                 |             |   |    |     |   |    |     |   |    |                   |               |               | 22nF - 22nF   |
|              |             |                     | 250                 |             |   |    |     |   |    |     |   |    |                   |               |               | 100nF - 100nF |
|              |             |                     | 500                 |             |   |    |     |   |    |     |   |    |                   |               |               | 10nF - 22nF   |
|              |             |                     | 630                 |             |   |    |     |   |    |     |   |    |                   |               |               | 22nF - 47nF   |
|              |             |                     | 1000                |             |   |    |     |   |    |     |   |    |                   |               |               | 22nF - 22nF   |
|              |             |                     | 2000                |             |   |    |     |   |    |     |   |    |                   | 1nF - 1nF     |               |               |
| High Level I | X7S (125°C) | 0201/0603           | 6                   |             |   |    |     |   |    |     |   |    |                   |               | 100nF - 100nF |               |
|              |             |                     | 10                  |             |   |    |     |   |    |     |   |    |                   |               | 100nF - 100nF |               |
|              |             |                     | 16                  |             |   |    |     |   |    |     |   |    |                   |               | 100nF - 100nF |               |
|              |             | 0402/1005           | 6                   |             |   |    |     |   |    |     |   |    |                   |               |               | 1uF - 1uF     |
|              |             |                     | 10                  |             |   |    |     |   |    |     |   |    |                   |               |               | 1uF - 1uF     |
|              |             |                     | 50                  |             |   |    |     |   |    |     |   |    |                   |               |               | 33nF - 100nF  |
|              |             | 0603/1608           | 6                   |             |   |    |     |   |    |     |   |    |                   |               |               | 1uF - 1uF     |
|              |             |                     | 10                  |             |   |    |     |   |    |     |   |    |                   |               |               | 1uF - 1uF     |
|              |             |                     | 16                  |             |   |    |     |   |    |     |   |    |                   |               |               | 680nF - 4.7uF |
|              |             | 0805/2012           | 25                  |             |   |    |     |   |    |     |   |    |                   |               |               | 2.2uF - 2.2uF |
|              |             |                     | 16                  |             |   |    |     |   |    |     |   |    |                   |               |               | 4.7uF - 10uF  |
|              |             |                     | 25                  |             |   |    |     |   |    |     |   |    |                   |               |               | 2.2uF - 10uF  |
| 1206/3216    | 100         |                     |                     |             |   |    |     |   |    |     |   |    |                   | 1uF - 1uF     |               |               |
|              | 4           |                     |                     |             |   |    |     |   |    |     |   |    |                   | 47uF - 47uF   |               |               |
|              | 25          |                     |                     |             |   |    |     |   |    |     |   |    |                   | 10uF - 10uF   |               |               |
| 1210/3225    | 4           |                     |                     |             |   |    |     |   |    |     |   |    |                   | 100uF - 100uF |               |               |
|              | 6           |                     |                     |             |   |    |     |   |    |     |   |    |                   | 100uF - 100uF |               |               |
|              | 25          |                     |                     |             |   |    |     |   |    |     |   |    |                   | 22uF - 22uF   |               |               |
|              | 50          |                     |                     |             |   |    |     |   |    |     |   |    |                   | 10uF - 10uF   |               |               |
|              | 100         |                     |                     |             |   |    |     |   |    |     |   |    |                   | 4.7uF - 10uF  |               |               |
| High Level I | X7T (125°C) | 01005/0402          | 2                   |             |   |    |     |   |    |     |   |    |                   |               | 470nF - 470nF |               |
|              |             |                     | 6                   |             |   |    |     |   |    |     |   |    |                   |               | 220nF - 220nF |               |
|              |             | 0201/0603           | 10                  |             |   |    |     |   |    |     |   |    |                   |               |               | 10nF - 10nF   |
|              |             |                     | 2                   |             |   |    |     |   |    |     |   |    |                   |               |               | 100nF - 220nF |
|              |             | 0402/1005           | 4                   |             |   |    |     |   |    |     |   |    |                   |               |               | 10uF - 10uF   |
|              |             |                     | 10                  |             |   |    |     |   |    |     |   |    |                   |               |               | 2.2uF - 2.2uF |
|              |             |                     | 16                  |             |   |    |     |   |    |     |   |    |                   |               |               | 2.2uF - 2.2uF |
|              |             | 0603/1608           | 6                   |             |   |    |     |   |    |     |   |    |                   |               |               | 4.7uF - 10uF  |
|              |             |                     | 10                  |             |   |    |     |   |    |     |   |    |                   |               |               | 1uF - 10uF    |
|              |             | 0805/2012           | 6                   |             |   |    |     |   |    |     |   |    |                   |               |               | 22uF - 22uF   |
|              |             |                     | 10                  |             |   |    |     |   |    |     |   |    |                   |               |               | 22uF - 22uF   |
|              |             | 1206/3216           | 35                  |             |   |    |     |   |    |     |   |    |                   |               |               | 10uF - 10uF   |
| 1210/3225    | 6           |                     |                     |             |   |    |     |   |    |     |   |    |                   | 22uF - 47uF   |               |               |



# Normal Capacitors\_High Level I

## Product Lineup (COG)

Size Code (inch/mm) : 0201/0603

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 0.33                | 25                  | COG | 10pF        | ±5%                   | CL03C100JA3NNW# |
| 2   | 0.33                | 25                  | COG | 33pF        | ±5%                   | CL03C330JA3NNW# |
| 3   | 0.33                | 25                  | COG | 100pF       | ±5%                   | CL03C101JA3NNW# |
| 4   | 0.33                | 50                  | COG | 33pF        | ±5%                   | CL03C330JB3NNW# |
| 5   | 0.33                | 50                  | COG | 47pF        | ±5%                   | CL03C470JB3NNW# |

Size Code (inch/mm) : 0402/1005

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 0.55                | 25                  | COG | 100pF       | ±5%                   | CL05C101JA5NNW# |
| 2   | 0.55                | 25                  | COG | 220pF       | ±5%                   | CL05C221JA5NNW# |
| 3   | 0.55                | 50                  | COG | 0.5pF       | ±0.25pF               | CL05C0R5CB5NNW# |
| 4   | 0.55                | 50                  | COG | 1.3pF       | ±0.25pF               | CL05CR75CB5NNW# |
| 5   | 0.55                | 50                  | COG | 2pF         | ±0.25pF               | CL05C1R3CB5NNW# |
| 6   | 0.55                | 50                  | COG | 2.2pF       | ±0.25pF               | CL05C020CB5NNW# |
| 7   | 0.55                | 50                  | COG | 2.4pF       | ±0.1pF                | CL05C2R2CB5NNW# |
| 8   | 0.55                | 50                  | COG | 4pF         | ±0.25pF               | CL05C2R4BB5NNW# |
| 9   | 0.55                | 50                  | COG | 4.3pF       | ±0.25pF               | CL05C040CB5NNW# |
| 10  | 0.55                | 50                  | COG | 4.7pF       | ±0.25pF               | CL05C4R3CB5NNW# |
| 11  | 0.55                | 50                  | COG | 5.6pF       | ±0.25pF               | CL05C4R7CB5NNW# |
| 12  | 0.55                | 50                  | COG | 0.75pF      | ±0.25pF               | CL05C5R6CB5NNW# |
| 13  | 0.55                | 50                  | COG | 8.2pF       | ±0.25pF               | CL05C8R2CB5NNW# |
| 14  | 0.55                | 50                  | COG | 9pF         | ±0.25pF               | CL05C090CB5NNW# |
| 15  | 0.55                | 50                  | COG | 10pF        | ±5%                   | CL05C100JB5NNW# |
| 16  | 0.55                | 50                  | COG | 12pF        | ±0.25pF               | CL05C120CB5NNW# |
| 17  | 0.55                | 50                  | COG | 12pF        | ±5%                   | CL05C120JB5NNW# |
| 18  | 0.55                | 50                  | COG | 15pF        | ±0.25pF               | CL05C150CB5NNW# |
| 19  | 0.55                | 50                  | COG | 15pF        | ±5%                   | CL05C150JB5NNW# |
| 20  | 0.55                | 50                  | COG | 18pF        | ±1%                   | CL05C180FB5NNW# |
| 21  | 0.55                | 50                  | COG | 18pF        | ±5%                   | CL05C180JB5NNW# |
| 22  | 0.55                | 50                  | COG | 20pF        | ±5%                   | CL05C200JB5NNW# |
| 23  | 0.55                | 50                  | COG | 22pF        | ±5%                   | CL05C220JB5NNW# |
| 24  | 0.55                | 50                  | COG | 24pF        | ±5%                   | CL05C240JB5NNW# |
| 25  | 0.55                | 50                  | COG | 27pF        | ±5%                   | CL05C270JB5NNW# |



# Normal Capacitors\_High Level I

Size Code (inch/mm) : 0402/1005

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 26  | 0.55                | 50                  | COG | 33pF        | ±5%                   | CL05C330JB5NNW# |
| 27  | 0.55                | 50                  | COG | 39pF        | ±5%                   | CL05C390JB5NNW# |
| 28  | 0.55                | 50                  | COG | 47pF        | ±1%                   | CL05C470FB5NNW# |
| 29  | 0.55                | 50                  | COG | 47pF        | ±5%                   | CL05C470JB5NNW# |
| 30  | 0.55                | 50                  | COG | 56pF        | ±5%                   | CL05C560JB5NNW# |
| 31  | 0.55                | 50                  | COG | 68pF        | ±5%                   | CL05C680JB5NNW# |
| 32  | 0.55                | 50                  | COG | 82pF        | ±5%                   | CL05C820JB5NNW# |
| 33  | 0.55                | 50                  | COG | 100pF       | ±1%                   | CL05C101FB5NNW# |
| 34  | 0.55                | 50                  | COG | 100pF       | ±5%                   | CL05C101JB5NNW# |
| 35  | 0.55                | 50                  | COG | 150pF       | ±5%                   | CL05C151JB5NNW# |
| 36  | 0.55                | 50                  | COG | 180pF       | ±5%                   | CL05C181JB5NNW# |
| 37  | 0.55                | 50                  | COG | 220pF       | ±5%                   | CL05C221JB5NNW# |
| 38  | 0.55                | 50                  | COG | 270pF       | ±5%                   | CL05C271JB5NNW# |
| 39  | 0.55                | 50                  | COG | 330pF       | ±5%                   | CL05C331JB5NNW# |
| 40  | 0.55                | 50                  | COG | 390pF       | ±5%                   | CL05C391JB5NNW# |
| 41  | 0.55                | 50                  | COG | 470pF       | ±5%                   | CL05C471JB5NNW# |
| 42  | 0.55                | 50                  | COG | 560pF       | ±5%                   | CL05C561JB5NNW# |
| 43  | 0.55                | 50                  | COG | 680pF       | ±5%                   | CL05C681JB5NNW# |
| 44  | 0.55                | 50                  | COG | 820pF       | ±5%                   | CL05C821JB5NNW# |
| 45  | 0.55                | 50                  | COG | 1nF         | ±5%                   | CL05C102JB5NNW# |

Size Code (inch/mm) : 0603/1608

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 0.90                | 25                  | COG | 680pF       | ±5%                   | CL10C681JA8NNW# |
| 2   | 0.90                | 25                  | COG | 1.5nF       | ±2%                   | CL10C152GA8NNW# |
| 3   | 0.90                | 50                  | COG | 1pF         | ±0.25pF               | CL10C010CB8NNW# |
| 4   | 0.90                | 50                  | COG | 1.8pF       | ±0.25pF               | CL10C1R8CB8NNW# |
| 5   | 0.90                | 50                  | COG | 2.2pF       | ±0.1pF                | CL10C2R2BB8NNW# |
| 6   | 0.90                | 50                  | COG | 2.2pF       | ±0.25pF               | CL10C2R2CB8NNW# |
| 7   | 0.90                | 50                  | COG | 3.3pF       | ±0.25pF               | CL10C3R3CB8NNW# |
| 8   | 0.90                | 50                  | COG | 3.9pF       | ±0.1pF                | CL10C3R9BB8NNW# |
| 9   | 0.90                | 50                  | COG | 3.9pF       | ±0.25pF               | CL10C3R9CB8NNW# |
| 10  | 0.90                | 50                  | COG | 4.7pF       | ±0.1pF                | CL10C4R7BB8NNW# |
| 11  | 0.90                | 50                  | COG | 4.7pF       | ±0.25pF               | CL10C4R7CB8NNW# |
| 12  | 0.90                | 50                  | COG | 5pF         | ±0.1pF                | CL10C050BB8NNW# |
| 13  | 0.90                | 50                  | COG | 5.6pF       | ±0.25pF               | CL10C5R6CB8NNW# |
| 14  | 0.90                | 50                  | COG | 6.2pF       | ±0.25pF               | CL10C6R2CB8NNW# |
| 15  | 0.90                | 50                  | COG | 6.8pF       | ±0.25pF               | CL10C6R8CB8NNW# |
| 16  | 0.90                | 50                  | COG | 8.2pF       | ±0.25pF               | CL10C8R2CB8NNW# |
| 17  | 0.90                | 50                  | COG | 10pF        | ±0.25pF               | CL10C100CB8NNW# |
| 18  | 0.90                | 50                  | COG | 10pF        | ±5%                   | CL10C100JB8NNW# |
| 19  | 0.90                | 50                  | COG | 10pF        | ±10%                  | CL10C100KB8NNW# |
| 20  | 0.90                | 50                  | COG | 12pF        | ±5%                   | CL10C120JB8NNW# |



# Normal Capacitors\_High Level I

Size Code (inch/mm) : 0603/1608

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 21  | 0.90                | 50                  | COG | 15pF        | ±1%                   | CL10C150FB8NNW# |
| 22  | 0.90                | 50                  | COG | 15pF        | ±5%                   | CL10C150JB8NNW# |
| 23  | 0.90                | 50                  | COG | 18pF        | ±5%                   | CL10C180JB8NNW# |
| 24  | 0.90                | 50                  | COG | 22pF        | ±1%                   | CL10C220FB8NNW# |
| 25  | 0.90                | 50                  | COG | 22pF        | ±2%                   | CL10C220GB8NNW# |
| 26  | 0.90                | 50                  | COG | 22pF        | ±5%                   | CL10C220JB8NNW# |
| 27  | 0.90                | 50                  | COG | 33pF        | ±5%                   | CL10C330JB8NNW# |
| 28  | 0.90                | 50                  | COG | 39pF        | ±5%                   | CL10C390JB8NNW# |
| 29  | 0.90                | 50                  | COG | 47pF        | ±1%                   | CL10C470FB8NNW# |
| 30  | 0.90                | 50                  | COG | 47pF        | ±5%                   | CL10C470JB8NNW# |
| 31  | 0.90                | 50                  | COG | 47pF        | ±10%                  | CL10C470KB8NNW# |
| 32  | 0.90                | 50                  | COG | 56pF        | ±5%                   | CL10C560JB8NNW# |
| 33  | 0.90                | 50                  | COG | 68pF        | ±5%                   | CL10C680JB8NNW# |
| 34  | 0.90                | 50                  | COG | 82pF        | ±5%                   | CL10C820JB8NNW# |
| 35  | 0.90                | 50                  | COG | 100pF       | ±5%                   | CL10C101JB8NNW# |
| 36  | 0.90                | 50                  | COG | 100pF       | ±10%                  | CL10C101KB8NNW# |
| 37  | 0.90                | 50                  | COG | 120pF       | ±5%                   | CL10C121JB8NNW# |
| 38  | 0.90                | 50                  | COG | 150pF       | ±5%                   | CL10C151JB8NNW# |
| 39  | 0.90                | 50                  | COG | 180pF       | ±5%                   | CL10C181JB8NNW# |
| 40  | 0.90                | 50                  | COG | 200pF       | ±5%                   | CL10C201JB8NNW# |
| 41  | 0.90                | 50                  | COG | 220pF       | ±5%                   | CL10C221JB8NNW# |
| 42  | 0.90                | 50                  | COG | 270pF       | ±5%                   | CL10C271JB8NNW# |
| 43  | 0.90                | 50                  | COG | 330pF       | ±5%                   | CL10C331JB8NNW# |
| 44  | 0.90                | 50                  | COG | 390pF       | ±5%                   | CL10C391JB8NNW# |
| 45  | 0.90                | 50                  | COG | 470pF       | ±5%                   | CL10C471JB8NNW# |
| 46  | 0.90                | 50                  | COG | 560pF       | ±5%                   | CL10C561JB8NNW# |
| 47  | 0.90                | 50                  | COG | 680pF       | ±5%                   | CL10C681JB8NNW# |
| 48  | 0.90                | 50                  | COG | 820pF       | ±5%                   | CL10C821JB8NNW# |
| 49  | 0.90                | 50                  | COG | 1nF         | ±5%                   | CL10C102JB8NNW# |
| 50  | 0.90                | 50                  | COG | 1.2nF       | ±5%                   | CL10C122JB8NNW# |
| 51  | 0.90                | 50                  | COG | 1.5nF       | ±5%                   | CL10C152JB8NNW# |
| 52  | 0.90                | 50                  | COG | 2.2nF       | ±5%                   | CL10C222JB8NNW# |
| 53  | 0.90                | 100                 | COG | 10pF        | ±5%                   | CL10C100JC8NNW# |
| 54  | 0.90                | 100                 | COG | 33pF        | ±5%                   | CL10C330JC8NNW# |
| 55  | 0.90                | 100                 | COG | 100pF       | ±5%                   | CL10C101JC8NNW# |
| 56  | 0.90                | 100                 | COG | 150pF       | ±5%                   | CL10C151JC8NNW# |
| 57  | 0.90                | 100                 | COG | 220pF       | ±5%                   | CL10C221JC8NNW# |
| 58  | 0.90                | 100                 | COG | 270pF       | ±5%                   | CL10C271JC8NNW# |
| 59  | 0.90                | 100                 | COG | 330pF       | ±5%                   | CL10C331JC8NNW# |



# Normal Capacitors\_High Level I

Size Code (inch/mm) : 0805/2012

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 0.75                | 50                  | COG | 33pF        | ±5%                   | CL21C330JBANNW# |
| 2   | 0.75                | 50                  | COG | 100pF       | ±2%                   | CL21C101GBANNW# |
| 3   | 0.75                | 50                  | COG | 100pF       | ±5%                   | CL21C101JBANNW# |
| 4   | 0.75                | 50                  | COG | 150pF       | ±5%                   | CL21C151JBANNW# |
| 5   | 0.75                | 50                  | COG | 220pF       | ±5%                   | CL21C221JBANNW# |
| 6   | 0.75                | 50                  | COG | 270pF       | ±5%                   | CL21C271JBANNW# |
| 7   | 0.75                | 50                  | COG | 330pF       | ±5%                   | CL21C331JBANNW# |
| 8   | 0.75                | 50                  | COG | 390pF       | ±5%                   | CL21C391JBANNW# |
| 9   | 0.75                | 50                  | COG | 470pF       | ±5%                   | CL21C471JBANNW# |
| 10  | 0.75                | 50                  | COG | 560pF       | ±5%                   | CL21C561JBANNW# |
| 11  | 0.75                | 50                  | COG | 680pF       | ±5%                   | CL21C681JBANNW# |
| 12  | 0.95                | 50                  | COG | 680pF       | ±5%                   | CL21C681JBCNNW# |
| 13  | 0.95                | 50                  | COG | 1nF         | ±5%                   | CL21C102JBCNNW# |
| 14  | 1.35                | 50                  | COG | 1.5nF       | ±5%                   | CL21C152JBFNNW# |
| 15  | 1.35                | 50                  | COG | 2.2nF       | ±5%                   | CL21C222JBFNNW# |
| 16  | 1.35                | 50                  | COG | 2.7nF       | ±5%                   | CL21C272JBFNNW# |
| 17  | 1.35                | 50                  | COG | 3.3nF       | ±5%                   | CL21C332JBFNNW# |
| 18  | 1.35                | 50                  | COG | 4.7nF       | ±5%                   | CL21C472JBFNNW# |
| 19  | 1.35                | 50                  | COG | 10nF        | ±5%                   | CL21C103JBFNNW# |
| 20  | 0.75                | 100                 | COG | 330pF       | ±5%                   | CL21C331JCANNW# |
| 21  | 0.95                | 100                 | COG | 470pF       | ±5%                   | CL21C471JCCNNW# |
| 22  | 0.95                | 100                 | COG | 680pF       | ±5%                   | CL21C681JCCNNW# |
| 23  | 1.35                | 100                 | COG | 1nF         | ±5%                   | CL21C102JCFNNW# |
| 24  | 0.95                | 200                 | COG | 220pF       | ±5%                   | CL21C221JDCNNW# |
| 25  | 0.95                | 250                 | COG | 10pF        | ±5%                   | CL21C100JECNNW# |



# Normal Capacitors\_High Level I

Size Code (inch/mm) : 1206/3216, 1210/3225

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 1.40                | 25                  | COG | 10nF        | ±2%                   | CL31C103GAFNNW# |
| 2   | 1.40                | 25                  | COG | 10nF        | ±5%                   | CL31C103JAFNNW# |
| 3   | 1.00                | 50                  | COG | 1nF         | ±5%                   | CL31C102JBCNNW# |
| 4   | 1.00                | 50                  | COG | 1.5nF       | ±2%                   | CL31C152GBCNNW# |
| 5   | 1.40                | 50                  | COG | 3.3nF       | ±5%                   | CL31C332JBFNNW# |
| 6   | 1.80                | 50                  | COG | 27nF        | ±5%                   | CL31C273JBHNNW# |
| 7   | 1.80                | 50                  | COG | 33nF        | ±5%                   | CL31C333JBHNNW# |
| 8   | 1.00                | 100                 | COG | 680pF       | ±5%                   | CL31C681JCCNNW# |
| 9   | 1.00                | 100                 | COG | 1nF         | ±5%                   | CL31C102JCCNNW# |
| 10  | 1.00                | 100                 | COG | 1nF         | ±10%                  | CL31C102KCCNNW# |
| 11  | 1.40                | 500                 | COG | 10pF        | ±5%                   | CL31C100JGFNNW# |
| 12  | 1.40                | 500                 | COG | 39pF        | ±5%                   | CL31C390JGFNNW# |
| 13  | 1.40                | 500                 | COG | 47pF        | ±5%                   | CL31C470JGFNNW# |
| 14  | 1.40                | 500                 | COG | 100pF       | ±2%                   | CL31C101GGFNNW# |
| 15  | 1.40                | 630                 | COG | 10pF        | ±5%                   | CL31C100JHFNNW# |
| 16  | 1.40                | 630                 | COG | 22pF        | ±5%                   | CL31C220JHFNNW# |
| 17  | 1.40                | 630                 | COG | 100pF       | ±5%                   | CL31C101JHFNNW# |
| 18  | 1.40                | 630                 | COG | 150pF       | ±5%                   | CL31C151JHFNNW# |
| 19  | 1.40                | 630                 | COG | 220pF       | ±5%                   | CL31C221JHFNNW# |
| 20  | 1.80                | 630                 | COG | 10nF        | ±5%                   | CL31C103JHHNNW# |
| 21  | 2.70                | 100                 | COG | 47nF        | ±5%                   | CL32C473JCJNNW# |
| 22  | 2.70                | 630                 | COG | 22nF        | ±5%                   | CL32C223JHJNNW# |
| 23  | 2.70                | 630                 | COG | 33nF        | ±5%                   | CL32C333JHJNNW# |
| 24  | 2.80                | 1000                | COG | 22nF        | ±5%                   | CL32C223JIVNNW# |

## Product Lineup (X5R)

Size Code (inch/mm) : 0201/0603

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 0.33                | 6.3                 | X5R | 10nF        | ±10%                  | CL03A103KQ3NNW# |
| 2   | 0.33                | 6.3                 | X5R | 100nF       | ±10%                  | CL03A104KQ3N3W# |
| 3   | 0.33                | 6.3                 | X5R | 100nF       | ±10%                  | CL03A104KQ3NNW# |
| 4   | 0.33                | 6.3                 | X5R | 470nF       | ±20%                  | CL03A474MQ3NNW# |
| 5   | 0.39                | 6.3                 | X5R | 2.2uF       | ±20%                  | CL03A225MQ3CRW# |
| 6   | 0.33                | 10                  | X5R | 2.2nF       | ±10%                  | CL03A222KP3NNW# |
| 7   | 0.33                | 10                  | X5R | 4.7nF       | ±10%                  | CL03A472KP3NNW# |
| 8   | 0.33                | 10                  | X5R | 10nF        | ±10%                  | CL03A103KP3NNW# |
| 9   | 0.33                | 10                  | X5R | 100nF       | ±10%                  | CL03A104KP3NNW# |
| 10  | 0.33                | 10                  | X5R | 100nF       | ±20%                  | CL03A104MP3NNW# |
| 11  | 0.33                | 25                  | X5R | 100nF       | ±10%                  | CL03A104KA3NNW# |



# Normal Capacitors\_High Level I

Size Code (inch/mm) : 0402/1005

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 0.55                | 4                   | X5R | 2.2uF       | ±20%                  | CL05A225MR5NNW# |
| 2   | 0.65                | 4                   | X5R | 4.7uF       | ±20%                  | CL05A475MR5NRW# |
| 3   | 0.55                | 6.3                 | X5R | 100nF       | ±10%                  | CL05A104KQ5NNW# |
| 4   | 0.55                | 6.3                 | X5R | 220nF       | ±10%                  | CL05A224KQ5NNW# |
| 5   | 0.55                | 6.3                 | X5R | 470nF       | ±10%                  | CL05A474KQ5NNW# |
| 6   | 0.55                | 6.3                 | X5R | 1uF         | ±10%                  | CL05A105KQ5NNW# |
| 7   | 0.55                | 6.3                 | X5R | 1uF         | ±20%                  | CL05A105MQ5NNW# |
| 8   | 0.55                | 6.3                 | X5R | 2.2uF       | ±20%                  | CL05A225MQ5NNW# |
| 9   | 0.65                | 6.3                 | X5R | 4.7uF       | ±20%                  | CL05A475MQ5NRW# |
| 10  | 0.70                | 6.3                 | X5R | 10uF        | ±20%                  | CL05A106MQ5NUW# |
| 11  | 0.55                | 10                  | X5R | 100nF       | ±10%                  | CL05A104KP5NNW# |
| 12  | 0.55                | 10                  | X5R | 220nF       | ±10%                  | CL05A224KP5NNW# |
| 13  | 0.55                | 10                  | X5R | 1uF         | ±10%                  | CL05A105KP5NNW# |
| 14  | 0.60                | 10                  | X5R | 1uF         | ±10%                  | CL05A105KP5NQW# |
| 15  | 0.70                | 10                  | X5R | 10uF        | ±20%                  | CL05A106MP5IUW# |
| 16  | 0.55                | 16                  | X5R | 100nF       | ±10%                  | CL05A104K05NNW# |
| 17  | 0.55                | 16                  | X5R | 220nF       | ±10%                  | CL05A224K05NNW# |
| 18  | 0.55                | 16                  | X5R | 470nF       | ±10%                  | CL05A474K05NNW# |
| 19  | 0.55                | 16                  | X5R | 1uF         | ±10%                  | CL05A105K05NNW# |
| 20  | 0.60                | 16                  | X5R | 1uF         | ±10%                  | CL05A105K05NQW# |
| 21  | 0.55                | 16                  | X5R | 1uF         | ±10%                  | CL05A105K05QNW# |
| 22  | 0.60                | 16                  | X5R | 1uF         | ±20%                  | CL05A105M05NQW# |
| 23  | 0.55                | 25                  | X5R | 100nF       | ±10%                  | CL05A104KA5NNW# |
| 24  | 0.55                | 25                  | X5R | 220nF       | ±10%                  | CL05A224KA5NNW# |
| 25  | 0.55                | 25                  | X5R | 470nF       | ±10%                  | CL05A474KA5NNW# |
| 26  | 0.60                | 25                  | X5R | 1uF         | ±10%                  | CL05A105KA5NQW# |
| 27  | 0.65                | 35                  | X5R | 1uF         | ±10%                  | CL05A105KL5NRW# |



# Normal Capacitors\_High Level I

Size Code (inch/mm) : 0603/1608

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 0.95                | 4Vdc                | X5R | 22uF        | ±20%                  | CL10A226MR8NQW# |
| 2   | 1.05                | 4Vdc                | X5R | 22uF        | ±20%                  | CL10A226MR8NUW# |
| 3   | 1.00                | 4Vdc                | X5R | 22uF        | ±20%                  | CL10A226MR8QRW# |
| 4   | 1.00                | 4Vdc                | X5R | 47uF        | ±20%                  | CL10A476MR8NRW# |
| 5   | 0.90                | 6.3Vdc              | X5R | 1uF         | ±10%                  | CL10A105KQ8NNW# |
| 6   | 0.90                | 6.3Vdc              | X5R | 2.2uF       | ±10%                  | CL10A225KQ8NNW# |
| 7   | 0.90                | 6.3Vdc              | X5R | 4.7uF       | ±10%                  | CL10A475KQ8NNW# |
| 8   | 0.90                | 6.3Vdc              | X5R | 4.7uF       | ±20%                  | CL10A475MQ8NNW# |
| 9   | 0.95                | 6.3Vdc              | X5R | 4.7uF       | ±20%                  | CL10A475MQ8NQW# |
| 10  | 0.90                | 6.3Vdc              | X5R | 10uF        | ±10%                  | CL10A106KQ8NNW# |
| 11  | 0.90                | 6.3Vdc              | X5R | 10uF        | ±20%                  | CL10A106MQ8NNW# |
| 12  | 0.90                | 10Vdc               | X5R | 470nF       | ±10%                  | CL10A474KP8NNW# |
| 13  | 0.90                | 10Vdc               | X5R | 1uF         | ±10%                  | CL10A105KP8NNW# |
| 14  | 0.90                | 10Vdc               | X5R | 2.2uF       | ±10%                  | CL10A225KP8NNW# |
| 15  | 0.90                | 10Vdc               | X5R | 4.7uF       | ±10%                  | CL10A475KP8NNW# |
| 16  | 0.95                | 10Vdc               | X5R | 10uF        | ±10%                  | CL10A106KP8NQW# |
| 17  | 0.95                | 10Vdc               | X5R | 10uF        | ±20%                  | CL10A106MP8NQW# |
| 18  | 0.90                | 16Vdc               | X5R | 1uF         | ±10%                  | CL10A105K08NNW# |
| 19  | 0.90                | 16Vdc               | X5R | 2.2uF       | ±10%                  | CL10A225K08NNW# |
| 20  | 0.95                | 16Vdc               | X5R | 4.7uF       | ±10%                  | CL10A475K08NQW# |
| 21  | 0.90                | 25Vdc               | X5R | 220nF       | ±10%                  | CL10A224KA8NNW# |
| 22  | 0.90                | 25Vdc               | X5R | 470nF       | ±10%                  | CL10A474KA8NNW# |
| 23  | 0.90                | 25Vdc               | X5R | 1uF         | ±10%                  | CL10A105KA8NNW# |
| 24  | 0.90                | 25Vdc               | X5R | 2.2uF       | ±10%                  | CL10A225KA8NNW# |
| 25  | 0.90                | 35Vdc               | X5R | 1uF         | ±10%                  | CL10A105KL8NNW# |
| 26  | 0.90                | 50Vdc               | X5R | 220nF       | ±10%                  | CL10A224KB8NNW# |
| 27  | 0.90                | 50Vdc               | X5R | 1uF         | ±10%                  | CL10A105KB8NNW# |

Size Code (inch/mm) : 0805/2012

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 1.45                | 2.5                 | X5R | 100uF       | ±20%                  | CL21A107MSYNNW# |
| 2   | 1.45                | 4                   | X5R | 47uF        | ±20%                  | CL21A476MRYNNW# |
| 3   | 1.45                | 4                   | X5R | 100uF       | ±20%                  | CL21A107MRYNNW# |
| 4   | 1.35                | 6.3                 | X5R | 4.7uF       | ±10%                  | CL21A475KQFNNW# |
| 5   | 1.35                | 6.3                 | X5R | 4.7uF       | ±20%                  | CL21A475MQFNNW# |
| 6   | 1.35                | 6.3                 | X5R | 10uF        | ±10%                  | CL21A106KQFNNW# |
| 7   | 1.40                | 6.3                 | X5R | 22uF        | ±20%                  | CL21A226MQQNNW# |
| 8   | 1.45                | 6.3                 | X5R | 22uF        | ±20%                  | CL21A226MQYNNW# |
| 9   | 1.45                | 6.3                 | X5R | 47uF        | ±20%                  | CL21A476MQYNNW# |
| 10  | 1.45                | 6.3                 | X5R | 100uF       | ±20%                  | CL21A107MQYNNW# |
| 11  | 1.35                | 10                  | X5R | 2.2uF       | ±10%                  | CL21A225KPFNNW# |
| 12  | 1.35                | 10                  | X5R | 4.7uF       | ±10%                  | CL21A475KPFNNW# |
| 13  | 1.35                | 10                  | X5R | 10uF        | ±10%                  | CL21A106KPFNNW# |
| 14  | 1.35                | 10                  | X5R | 10uF        | ±20%                  | CL21A106MPFNNW# |
| 15  | 1.40                | 10                  | X5R | 10uF        | ±20%                  | CL21A106MPQNNW# |
| 16  | 1.45                | 10                  | X5R | 22uF        | ±20%                  | CL21A226MPYNNW# |
| 17  | 1.45                | 10                  | X5R | 47uF        | ±20%                  | CL21A476MPYNNW# |



# Normal Capacitors\_High Level I

Size Code (inch/mm) : 0805/2012

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number      |
|-----|---------------------|---------------------|-----|-------------|-----------------------|------------------|
| 18  | 1.35                | 16                  | X5R | 10uF        | ±10%                  | CL21A106KOFNNW#  |
| 19  | 1.40                | 16                  | X5R | 10uF        | ±10%                  | CL21A106KQOQNNW# |
| 20  | 1.45                | 16                  | X5R | 22uF        | ±20%                  | CL21A226MOYNNW#  |
| 21  | 1.35                | 25                  | X5R | 2.2uF       | ±10%                  | CL21A225KAFNNW#  |
| 22  | 1.35                | 25                  | X5R | 4.7uF       | ±10%                  | CL21A475KAFNNW#  |
| 23  | 1.40                | 25                  | X5R | 4.7uF       | ±10%                  | CL21A475KAQNNW#  |
| 24  | 1.45                | 25                  | X5R | 10uF        | ±10%                  | CL21A106KAYQNNW# |
| 25  | 1.45                | 25                  | X5R | 10uF        | ±20%                  | CL21A106MAYQNNW# |
| 26  | 1.45                | 25                  | X5R | 22uF        | ±20%                  | CL21A226MAYNNW#  |

Size Code (inch/mm) : 1206/3216

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 1.90                | 4                   | X5R | 100uF       | ±20%                  | CL31A107MRKNNW# |
| 2   | 1.80                | 6.3                 | X5R | 10uF        | ±10%                  | CL31A106KQHNNW# |
| 3   | 1.80                | 6.3                 | X5R | 22uF        | ±10%                  | CL31A226KQHNNW# |
| 4   | 1.80                | 6.3                 | X5R | 22uF        | ±20%                  | CL31A226MQHNNW# |
| 5   | 1.80                | 6.3                 | X5R | 47uF        | ±10%                  | CL31A476KQHNNW# |
| 6   | 1.80                | 6.3                 | X5R | 47uF        | ±20%                  | CL31A476MQHNNW# |
| 7   | 1.90                | 6.3                 | X5R | 100uF       | ±20%                  | CL31A107MQKNNW# |
| 8   | 1.80                | 10                  | X5R | 22uF        | ±10%                  | CL31A226KPHNNW# |
| 9   | 1.80                | 10                  | X5R | 22uF        | ±20%                  | CL31A226MPHNNW# |
| 10  | 1.80                | 10                  | X5R | 47uF        | ±10%                  | CL31A476KPHNNW# |
| 11  | 1.90                | 10                  | X5R | 100uF       | ±20%                  | CL31A107MPKNNW# |
| 12  | 1.80                | 16                  | X5R | 22uF        | ±10%                  | CL31A226KOHNNW# |
| 13  | 1.80                | 16                  | X5R | 22uF        | ±20%                  | CL31A226MOHNNW# |
| 14  | 1.80                | 25                  | X5R | 4.7uF       | ±10%                  | CL31A475KAHNNW# |
| 15  | 1.80                | 25                  | X5R | 10uF        | ±10%                  | CL31A106KAHNNW# |
| 16  | 1.80                | 25                  | X5R | 10uF        | ±20%                  | CL31A106MAHNNW# |
| 17  | 1.80                | 25                  | X5R | 22uF        | ±10%                  | CL31A226KAHNNW# |
| 18  | 1.80                | 25                  | X5R | 22uF        | ±20%                  | CL31A226MAHNNW# |
| 19  | 1.80                | 50                  | X5R | 4.7uF       | ±10%                  | CL31A475KBHNNW# |
| 20  | 1.80                | 50                  | X5R | 10uF        | ±10%                  | CL31A106KBHNNW# |

Size Code (inch/mm) : 1210/3225

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 2.70                | 6.3                 | X5R | 22uF        | ±10%                  | CL32A226KQJNNW# |
| 2   | 2.70                | 6.3                 | X5R | 22uF        | ±20%                  | CL32A226MQJNNW# |
| 3   | 2.80                | 6.3                 | X5R | 100uF       | ±20%                  | CL32A107MQVNNW# |
| 4   | 2.80                | 6.3                 | X5R | 200uF       | ±20%                  | CL32A227MQVNNW# |
| 5   | 2.70                | 10                  | X5R | 22uF        | ±10%                  | CL32A226KPJNNW# |
| 6   | 2.70                | 10                  | X5R | 22uF        | ±20%                  | CL32A226MPJNNW# |
| 7   | 2.70                | 10                  | X5R | 47uF        | ±10%                  | CL32A476KPJNNW# |
| 8   | 2.80                | 10                  | X5R | 100uF       | ±20%                  | CL32A107MPVNNW# |
| 9   | 2.70                | 16                  | X5R | 22uF        | ±10%                  | CL32A226KOJNNW# |
| 10  | 2.70                | 16                  | X5R | 47uF        | ±10%                  | CL32A476KOJNNW# |
| 11  | 2.70                | 16                  | X5R | 47uF        | ±20%                  | CL32A476MOJNNW# |
| 12  | 2.70                | 25                  | X5R | 22uF        | ±10%                  | CL32A226KAJNNW# |
| 13  | 2.70                | 25                  | X5R | 22uF        | ±20%                  | CL32A226MAJNNW# |
| 14  | 2.70                | 50                  | X5R | 10uF        | ±10%                  | CL32A106KBJNNW# |



# Normal Capacitors\_High Level I

## Product Lineup (X6S)

Size Code (inch/mm) : 0201/0603

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 0.33                | 4                   | X6S | 100nF       | ±20%                  | CL03X104MR3NNW# |
| 2   | 0.33                | 6.3                 | X6S | 100nF       | ±10%                  | CL03X104KQ3NNW# |
| 3   | 0.33                | 6.3                 | X6S | 100nF       | ±20%                  | CL03X104MQ3NNW# |
| 4   | 0.39                | 6.3                 | X6S | 1µF         | ±20%                  | CL03X105MQ3CRW# |
| 5   | 0.33                | 10                  | X6S | 100nF       | ±10%                  | CL03X104KP3NNW# |
| 6   | 0.39                | 10                  | X6S | 220nF       | ±10%                  | CL03X224KP3NRW# |
| 7   | 0.39                | 10                  | X6S | 330nF       | ±10%                  | CL03X334KP3NRW# |
| 8   | 0.33                | 16                  | X6S | 100nF       | ±10%                  | CL03X104K03NNW# |
| 9   | 0.33                | 25                  | X6S | 100nF       | ±10%                  | CL03X104KA3NNW# |

Size Code (inch/mm) : 0402/1005

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 0.50                | 2.5                 | X6S | 4.3µF       | ±20%                  | CL05X435MS5NWW# |
| 2   | 0.80                | 2.5                 | X6S | 22µF        | ±20%                  | CL05X226MS6NUW# |
| 3   | 0.55                | 4                   | X6S | 470nF       | ±20%                  | CL05X474MR5NNW# |
| 4   | 0.55                | 4                   | X6S | 1µF         | ±20%                  | CL05X105MR5NNW# |
| 5   | 0.70                | 4                   | X6S | 2.2µF       | ±20%                  | CL05X225MR5QUW# |
| 6   | 0.70                | 4                   | X6S | 10µF        | ±20%                  | CL05X106MR5NUW# |
| 7   | 0.80                | 4                   | X6S | 22µF        | ±20%                  | CL05X226MR6NUW# |
| 8   | 0.55                | 6.3                 | X6S | 470nF       | ±10%                  | CL05X474KQ5NNW# |
| 9   | 0.55                | 6.3                 | X6S | 1µF         | ±10%                  | CL05X105KQ5NNW# |
| 10  | 0.60                | 6.3                 | X6S | 1µF         | ±10%                  | CL05X105KQ5NQW# |
| 11  | 0.55                | 6.3                 | X6S | 1µF         | ±20%                  | CL05X105MQ5NNW# |
| 12  | 0.70                | 6.3                 | X6S | 2.2µF       | ±20%                  | CL05X225MQ5QUW# |
| 13  | 0.70                | 6.3                 | X6S | 4.7µF       | ±20%                  | CL05X475MQ5NUW# |
| 14  | 0.70                | 6.3                 | X6S | 10µF        | ±20%                  | CL05X106MQ5NUW# |
| 15  | 0.55                | 10                  | X6S | 1µF         | ±10%                  | CL05X105KP5NNW# |
| 16  | 0.55                | 10                  | X6S | 1µF         | ±20%                  | CL05X105MP5NNW# |
| 17  | 0.70                | 10                  | X6S | 2.2µF       | ±10%                  | CL05X225KP5QUW# |
| 18  | 0.70                | 10                  | X6S | 2.2µF       | ±20%                  | CL05X225MP5QUW# |
| 19  | 0.60                | 16                  | X6S | 1µF         | ±10%                  | CL05X105K05NQW# |
| 20  | 0.70                | 16                  | X6S | 2.2µF       | ±20%                  | CL05X225M05NUW# |
| 21  | 0.60                | 25                  | X6S | 1µF         | ±10%                  | CL05X105KA5NQW# |
| 22  | 0.60                | 25                  | X6S | 1µF         | ±20%                  | CL05X105MA5NQW# |

Size Code (inch/mm) : 0603/1608

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 1.00                | 2.5                 | X6S | 47µF        | ±20%                  | CL10X476MS8NRW# |
| 2   | 0.90                | 4                   | X6S | 4.7µF       | ±10%                  | CL10X475KR8NNW# |
| 3   | 0.90                | 4                   | X6S | 10µF        | ±20%                  | CL10X106MR8NNW# |
| 4   | 1.00                | 4                   | X6S | 22µF        | ±20%                  | CL10X226MR8NUW# |



# Normal Capacitors\_High Level I

Size Code (inch/mm) : 0603/1608

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 5   | 1.05                | 4                   | X6S | 22uF        | ±20%                  | CL10X226MR8QRW# |
| 6   | 1.00                | 4                   | X6S | 47uF        | ±20%                  | CL10X476MR8NRW# |
| 7   | 1.00                | 6.3                 | X6S | 4.7uF       | ±10%                  | CL10X475KQ8NRW# |
| 8   | 0.90                | 6.3                 | X6S | 4.7uF       | ±20%                  | CL10X475MQ8NNW# |
| 9   | 0.95                | 6.3                 | X6S | 4.7uF       | ±20%                  | CL10X475MQ8NQW# |
| 10  | 1.00                | 6.3                 | X6S | 4.7uF       | ±20%                  | CL10X475MQ8NRW# |
| 11  | 1.00                | 6.3                 | X6S | 22uF        | ±20%                  | CL10X226MQ8QRW# |
| 12  | 1.00                | 10                  | X6S | 10uF        | ±20%                  | CL10X106MP8NRW# |
| 13  | 1.00                | 16                  | X6S | 4.7uF       | ±10%                  | CL10X475K08NRW# |
| 14  | 1.00                | 16                  | X6S | 10uF        | ±20%                  | CL10X106M08NRW# |

Size Code (inch/mm) : 0805/2012

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number      |
|-----|---------------------|---------------------|-----|-------------|-----------------------|------------------|
| 1   | 1.45                | 2.5                 | X6T | 47uF        | ±20%                  | CL21W476MSYNNW#  |
| 2   | 1.40                | 4                   | X6S | 22uF        | ±20%                  | CL21X226MRQNNW#  |
| 3   | 1.45                | 4                   | X6S | 22uF        | ±20%                  | CL21X226MRYNNW#  |
| 4   | 1.45                | 4                   | X6T | 47uF        | ±20%                  | CL21W476MRYNNW#  |
| 5   | 1.45                | 4                   | X6S | 47uF        | ±20%                  | CL21X476MRYNNW#  |
| 6   | 1.45                | 4                   | X6S | 100uF       | ±20%                  | CL21X107MRYNNW#  |
| 7   | 1.40                | 6.3                 | X6S | 10uF        | ±10%                  | CL21X106KQQNNW#  |
| 8   | 1.40                | 6.3                 | X6S | 10uF        | ±20%                  | CL21X106MQQNNW#  |
| 9   | 1.40                | 6.3                 | X6S | 22uF        | ±20%                  | CL21X226MQQNNW#  |
| 10  | 1.45                | 6.3                 | X6S | 22uF        | ±20%                  | CL21X226MQYNNW#  |
| 11  | 1.45                | 6.3                 | X6S | 47uF        | ±20%                  | CL21X476MQYNNW#  |
| 12  | 1.40                | 10                  | X6S | 10uF        | ±10%                  | CL21X106KPYNNW#  |
| 13  | 1.40                | 10                  | X6S | 10uF        | ±20%                  | CL21X106MPQNNW#  |
| 14  | 1.45                | 10                  | X6S | 22uF        | ±20%                  | CL21X226MPYNNW#  |
| 15  | 1.40                | 16                  | X6S | 10uF        | ±10%                  | CL21X106KQNNW#   |
| 16  | 1.40                | 16                  | X6S | 10uF        | ±20%                  | CL21X106MQNNW#   |
| 17  | 1.45                | 16                  | X6S | 22uF        | ±20%                  | CL21X226MOYNNW#  |
| 18  | 1.45                | 25                  | X6S | 10uF        | ±10%                  | CL21X106KAYQNNW# |
| 19  | 1.45                | 25                  | X6S | 10uF        | ±20%                  | CL21X106MAYQNNW# |

Size Code (inch/mm) : 1206/3216, 1210/3225

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 1.90                | 4                   | X6S | 100uF       | ±20%                  | CL31X107MRKNNW# |
| 2   | 1.80                | 6.3                 | X6S | 47uF        | ±20%                  | CL31X476MQHNNW# |
| 3   | 1.90                | 6.3                 | X6S | 100uF       | ±20%                  | CL31X107MQKNNW# |
| 4   | 2.80                | 4                   | X6S | 100uF       | ±20%                  | CL32X107MRVNNW# |
| 5   | 2.80                | 6.3                 | X6S | 100uF       | ±20%                  | CL32X107MQVNNW# |
| 6   | 2.70                | 16                  | X6S | 47uF        | ±20%                  | CL32X476MOJNNW# |



# Normal Capacitors\_High Level I

## Product Lineup (X7R)

Size Code (inch/mm) : 0201/0603

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 0.33                | 6.3                 | X7R | 10nF        | ±10%                  | CL03B103KQ3NNW# |
| 2   | 0.33                | 10                  | X7R | 10nF        | ±10%                  | CL03B103KP3NNW# |
| 3   | 0.33                | 10                  | X7R | 100nF       | ±10%                  | CL03B104KP3NNW# |
| 4   | 0.33                | 10                  | X7S | 100nF       | ±10%                  | CL03Y104KP3NNW# |
| 5   | 0.33                | 16                  | X7R | 1nF         | ±10%                  | CL03B102K03NNW# |
| 6   | 0.33                | 16                  | X7R | 10nF        | ±10%                  | CL03B103K03NNW# |
| 7   | 0.33                | 25                  | X7R | 680pF       | ±10%                  | CL03B681KA3NNW# |
| 8   | 0.33                | 25                  | X7R | 1nF         | ±10%                  | CL03B102KA3NNW# |
| 9   | 0.33                | 25                  | X7R | 10nF        | ±10%                  | CL03B103KA3NNW# |

Size Code (inch/mm) : 0402/1005

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number      |
|-----|---------------------|---------------------|-----|-------------|-----------------------|------------------|
| 1   | 0.55                | 4                   | X7R | 1uF         | ±10%                  | CL05B105KR5QNW#  |
| 2   | 0.55                | 6.3                 | X7R | 100nF       | ±10%                  | CL05B104KQ5NNW#  |
| 3   | 0.55                | 6.3                 | X7R | 220nF       | ±10%                  | CL05B224KQ5NNW#  |
| 4   | 0.55                | 6.3                 | X7R | 470nF       | ±10%                  | CL05B474KQ5ZNNW# |
| 5   | 0.55                | 6.3                 | X7R | 1uF         | ±10%                  | CL05B105KQ5QNW#  |
| 6   | 0.55                | 10                  | X7R | 10nF        | ±10%                  | CL05B103KP5NNW#  |
| 7   | 0.55                | 10                  | X7R | 27nF        | ±10%                  | CL05B273KP5NNW#  |
| 8   | 0.55                | 10                  | X7R | 33nF        | ±10%                  | CL05B333KP5NNW#  |
| 9   | 0.55                | 10                  | X7R | 47nF        | ±10%                  | CL05B473KP5NNW#  |
| 10  | 0.55                | 10                  | X7R | 100nF       | ±10%                  | CL05B104KP5NNW#  |
| 11  | 0.55                | 10                  | X7R | 220nF       | ±10%                  | CL05B224KP5NNW#  |
| 12  | 0.55                | 10                  | X7R | 470nF       | ±10%                  | CL05B474KP5ZNNW# |
| 13  | 0.55                | 16                  | X7R | 1nF         | ±10%                  | CL05B102K05NNW#  |
| 14  | 0.55                | 16                  | X7R | 10nF        | ±5%                   | CL05B103J05NNW#  |
| 15  | 0.55                | 16                  | X7R | 10nF        | ±10%                  | CL05B103K05NNW#  |
| 16  | 0.55                | 16                  | X7R | 10nF        | ±20%                  | CL05B103M05NNW#  |
| 17  | 0.55                | 16                  | X7R | 15nF        | ±10%                  | CL05B153K05NNW#  |
| 18  | 0.55                | 16                  | X7R | 22nF        | ±10%                  | CL05B223K05NNW#  |
| 19  | 0.55                | 16                  | X7R | 33nF        | ±10%                  | CL05B333K05NNW#  |
| 20  | 0.55                | 16                  | X7R | 39nF        | ±10%                  | CL05B393K05NNW#  |
| 21  | 0.55                | 16                  | X7R | 47nF        | ±10%                  | CL05B473K05NNW#  |
| 22  | 0.55                | 16                  | X7R | 68nF        | ±10%                  | CL05B683K05NNW#  |
| 23  | 0.55                | 16                  | X7R | 82nF        | ±10%                  | CL05B823K05NNW#  |
| 24  | 0.55                | 16                  | X7R | 100nF       | ±10%                  | CL05B104K05NNW#  |
| 25  | 0.55                | 16                  | X7R | 220nF       | ±10%                  | CL05B224K05NNW#  |
| 26  | 0.70                | 16                  | X7T | 2.2uF       | ±20%                  | CL05Z225M05NUW#  |
| 27  | 0.55                | 25                  | X7R | 220pF       | ±10%                  | CL05B221KA5NNW#  |
| 28  | 0.55                | 25                  | X7R | 1nF         | ±10%                  | CL05B102KA5NNW#  |
| 29  | 0.55                | 25                  | X7R | 3.3nF       | ±10%                  | CL05B332KA5NNW#  |
| 30  | 0.55                | 25                  | X7R | 3.9nF       | ±10%                  | CL05B392KA5NNW#  |



# Normal Capacitors\_High Level I

Size Code (inch/mm) : 0402/1005

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 31  | 0.55                | 25                  | X7R | 4.7nF       | ±10%                  | CL05B472KA5NNW# |
| 32  | 0.55                | 25                  | X7R | 5.6nF       | ±10%                  | CL05B562KA5NNW# |
| 33  | 0.55                | 25                  | X7R | 6.8nF       | ±10%                  | CL05B682KA5NNW# |
| 34  | 0.55                | 25                  | X7R | 8.2nF       | ±10%                  | CL05B822KA5NNW# |
| 35  | 0.55                | 25                  | X7R | 10nF        | ±5%                   | CL05B103JA5NNW# |
| 36  | 0.55                | 25                  | X7R | 10nF        | ±10%                  | CL05B103KA5NNW# |
| 37  | 0.55                | 25                  | X7R | 15nF        | ±10%                  | CL05B153KA5NNW# |
| 38  | 0.55                | 25                  | X7R | 22nF        | ±10%                  | CL05B223KA5NNW# |
| 39  | 0.55                | 25                  | X7R | 33nF        | ±10%                  | CL05B333KA5NNW# |
| 40  | 0.55                | 25                  | X7R | 47nF        | ±10%                  | CL05B473KA5NNW# |
| 41  | 0.55                | 25                  | X7R | 100nF       | ±10%                  | CL05B104KA5NNW# |
| 42  | 0.55                | 25                  | X7R | 100nF       | ±20%                  | CL05B104MA5NNW# |
| 43  | 0.55                | 25                  | X7R | 220nF       | ±10%                  | CL05B224KA5NNW# |
| 44  | 0.55                | 50                  | X7R | 220pF       | ±10%                  | CL05B221KB5NNW# |
| 45  | 0.55                | 50                  | X7R | 270pF       | ±10%                  | CL05B271KB5NNW# |
| 46  | 0.55                | 50                  | X7R | 330pF       | ±10%                  | CL05B331KB5NNW# |
| 47  | 0.55                | 50                  | X7R | 390pF       | ±10%                  | CL05B391KB5NNW# |
| 48  | 0.55                | 50                  | X7R | 470pF       | ±10%                  | CL05B471KB5NNW# |
| 49  | 0.55                | 50                  | X7R | 560pF       | ±10%                  | CL05B561KB5NNW# |
| 50  | 0.55                | 50                  | X7R | 680pF       | ±10%                  | CL05B681KB5NNW# |
| 51  | 0.55                | 50                  | X7R | 820pF       | ±10%                  | CL05B821KB5NNW# |
| 52  | 0.55                | 50                  | X7R | 1nF         | ±5%                   | CL05B102JB5NNW# |
| 53  | 0.55                | 50                  | X7R | 1nF         | ±10%                  | CL05B102KB5NNW# |
| 54  | 0.55                | 50                  | X7R | 1.5nF       | ±10%                  | CL05B152KB5NNW# |
| 55  | 0.55                | 50                  | X7R | 1.8nF       | ±10%                  | CL05B182KB5NNW# |
| 56  | 0.55                | 50                  | X7R | 2.2nF       | ±10%                  | CL05B222KB5NNW# |
| 57  | 0.55                | 50                  | X7R | 2.7nF       | ±10%                  | CL05B272KB5NNW# |
| 58  | 0.55                | 50                  | X7R | 3.3nF       | ±5%                   | CL05B332JB5NNW# |
| 59  | 0.55                | 50                  | X7R | 3.3nF       | ±10%                  | CL05B332KB5NNW# |
| 60  | 0.55                | 50                  | X7R | 3.9nF       | ±10%                  | CL05B392KB5NNW# |
| 61  | 0.55                | 50                  | X7R | 4.7nF       | ±10%                  | CL05B472KB5NNW# |
| 62  | 0.55                | 50                  | X7R | 8.2nF       | ±10%                  | CL05B822KB5NNW# |
| 63  | 0.55                | 50                  | X7R | 10nF        | ±10%                  | CL05B103KB5NNW# |
| 64  | 0.55                | 50                  | X7R | 22nF        | ±10%                  | CL05B223KB5NNW# |
| 65  | 0.55                | 50                  | X7R | 100nF       | ±10%                  | CL05B104KB5NNW# |



# Normal Capacitors\_High Level I

Size Code (inch/mm) : 0603/1608

| No. | Thickness Max.<br>(mm) | Rated Voltage<br>(Vdc) | TCC | Capacitance | Capacitance<br>Tolerance | Part Number     |
|-----|------------------------|------------------------|-----|-------------|--------------------------|-----------------|
| 1   | 0.90                   | 6.3                    | X7R | 2.2uF       | ±10%                     | CL10B225KQ8N3W# |
| 2   | 0.95                   | 6.3                    | X7T | 4.7uF       | ±10%                     | CL10Z475KQ8N3W# |
| 3   | 0.90                   | 10                     | X7R | 220nF       | ±10%                     | CL10B224KP8NNW# |
| 4   | 0.90                   | 10                     | X7R | 1uF         | ±10%                     | CL10B105KP8NNW# |
| 5   | 0.90                   | 10                     | X7R | 2.2uF       | ±10%                     | CL10B225KP8N3W# |
| 6   | 0.90                   | 16                     | X7R | 47nF        | ±10%                     | CL10B473K08NNW# |
| 7   | 0.90                   | 16                     | X7R | 100nF       | ±10%                     | CL10B104K08NNW# |
| 8   | 0.90                   | 16                     | X7R | 150nF       | ±10%                     | CL10B154K08NNW# |
| 9   | 0.90                   | 16                     | X7R | 220nF       | ±5%                      | CL10B224J08NNW# |
| 10  | 0.90                   | 16                     | X7R | 220nF       | ±10%                     | CL10B224K08NNW# |
| 11  | 0.90                   | 16                     | X7R | 470nF       | ±10%                     | CL10B474K08NNW# |
| 12  | 0.90                   | 16                     | X7R | 680nF       | ±10%                     | CL10B684K08NNW# |
| 13  | 0.90                   | 16                     | X7R | 1uF         | ±10%                     | CL10B105K08NNW# |
| 14  | 0.90                   | 25                     | X7R | 10nF        | ±10%                     | CL10B103KA8NNW# |
| 15  | 0.90                   | 25                     | X7R | 22nF        | ±10%                     | CL10B223KA8NNW# |
| 16  | 0.90                   | 25                     | X7R | 33nF        | ±10%                     | CL10B333KA8NNW# |
| 17  | 0.90                   | 25                     | X7R | 39nF        | ±10%                     | CL10B393KA8NNW# |
| 18  | 0.90                   | 25                     | X7R | 47nF        | ±10%                     | CL10B473KA8NNW# |
| 19  | 0.90                   | 25                     | X7R | 100nF       | ±10%                     | CL10B104KA8NNW# |
| 20  | 0.90                   | 25                     | X7R | 100nF       | ±20%                     | CL10B104MA8NNW# |
| 21  | 0.90                   | 25                     | X7R | 1uF         | ±10%                     | CL10B105KA8NNW# |
| 22  | 0.90                   | 50                     | X7R | 100pF       | ±10%                     | CL10B101KB8NNW# |
| 23  | 0.90                   | 50                     | X7R | 220pF       | ±10%                     | CL10B221KB8NNW# |
| 24  | 0.90                   | 50                     | X7R | 330pF       | ±10%                     | CL10B331KB8NNW# |
| 25  | 0.90                   | 50                     | X7R | 470pF       | ±10%                     | CL10B471KB8NNW# |
| 26  | 0.90                   | 50                     | X7R | 680pF       | ±10%                     | CL10B681KB8NNW# |
| 27  | 0.90                   | 50                     | X7R | 1nF         | ±10%                     | CL10B102KB8NNW# |
| 28  | 0.90                   | 50                     | X7R | 1.5nF       | ±10%                     | CL10B152KB8NNW# |
| 29  | 0.90                   | 50                     | X7R | 2.2nF       | ±5%                      | CL10B222JB8NNW# |
| 30  | 0.90                   | 50                     | X7R | 2.2nF       | ±10%                     | CL10B222KB8NNW# |
| 31  | 0.90                   | 50                     | X7R | 3.3nF       | ±10%                     | CL10B332KB8NNW# |
| 32  | 0.90                   | 50                     | X7R | 3.9nF       | ±10%                     | CL10B392KB8NNW# |
| 33  | 0.90                   | 50                     | X7R | 4.7nF       | ±10%                     | CL10B472KB8NNW# |
| 34  | 0.90                   | 50                     | X7R | 6.8nF       | ±10%                     | CL10B682KB8NNW# |
| 35  | 0.90                   | 50                     | X7R | 8.2nF       | ±10%                     | CL10B822KB8NNW# |
| 36  | 0.90                   | 50                     | X7R | 10nF        | ±5%                      | CL10B103JB8NNW# |
| 37  | 0.90                   | 50                     | X7R | 10nF        | ±10%                     | CL10B103KB8NNW# |
| 38  | 0.90                   | 50                     | X7R | 22nF        | ±10%                     | CL10B223KB8NNW# |
| 39  | 0.90                   | 50                     | X7R | 27nF        | ±10%                     | CL10B273KB8NNW# |
| 40  | 0.90                   | 50                     | X7R | 33nF        | ±10%                     | CL10B333KB8NNW# |
| 41  | 0.90                   | 50                     | X7R | 47nF        | ±10%                     | CL10B473KB8NNW# |
| 42  | 0.90                   | 50                     | X7R | 100nF       | ±5%                      | CL10B104JB8NNW# |
| 43  | 0.90                   | 50                     | X7R | 100nF       | ±10%                     | CL10B104KB8NNW# |
| 44  | 0.90                   | 50                     | X7R | 220nF       | ±10%                     | CL10B224KB8NNW# |
| 45  | 0.90                   | 100                    | X7R | 1nF         | ±10%                     | CL10B102KC8NNW# |
| 46  | 0.90                   | 100                    | X7R | 10nF        | ±10%                     | CL10B103KC8NNW# |
| 47  | 0.90                   | 100                    | X7R | 100nF       | ±10%                     | CL10B104KC8N3W# |



# Normal Capacitors\_High Level I

Size Code (inch/mm) : 0805/2012

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 1.40                | 6.3                 | X7R | 10uF        | ±10%                  | CL21B106KQNNW#  |
| 2   | 1.45                | 6.3                 | X7T | 22uF        | ±20%                  | CL21Z226MQYNNW# |
| 3   | 1.35                | 10                  | X7R | 2.2uF       | ±10%                  | CL21B225KPFNNW# |
| 4   | 1.40                | 10                  | X7R | 10uF        | ±10%                  | CL21B106KQNNW#  |
| 5   | 1.35                | 16                  | X7R | 2.2uF       | ±10%                  | CL21B225KOFNNW# |
| 6   | 1.35                | 16                  | X7R | 4.7uF       | ±10%                  | CL21B475KOFNNW# |
| 7   | 0.95                | 25                  | X7R | 100nF       | ±10%                  | CL21B104KACNNW# |
| 8   | 1.35                | 25                  | X7R | 1uF         | ±10%                  | CL21B105KAFNNW# |
| 9   | 1.35                | 25                  | X7R | 2.2uF       | ±10%                  | CL21B225KAFNNW# |
| 10  | 0.75                | 50                  | X7R | 220pF       | ±10%                  | CL21B221KBANNW# |
| 11  | 0.75                | 50                  | X7R | 330pF       | ±10%                  | CL21B331KBANNW# |
| 12  | 0.75                | 50                  | X7R | 470pF       | ±10%                  | CL21B471KBANNW# |
| 13  | 0.75                | 50                  | X7R | 680pF       | ±10%                  | CL21B681KBANNW# |
| 14  | 0.75                | 50                  | X7R | 820pF       | ±10%                  | CL21B821KBANNW# |
| 15  | 0.75                | 50                  | X7R | 1nF         | ±10%                  | CL21B102KBANNW# |
| 16  | 0.75                | 50                  | X7R | 1.8nF       | ±10%                  | CL21B182KBANNW# |
| 17  | 0.75                | 50                  | X7R | 2.7nF       | ±10%                  | CL21B272KBANNW# |
| 18  | 0.75                | 50                  | X7R | 3.3nF       | ±10%                  | CL21B332KBANNW# |
| 19  | 0.75                | 50                  | X7R | 4.7nF       | ±10%                  | CL21B472KBANNW# |
| 20  | 0.75                | 50                  | X7R | 5.6nF       | ±10%                  | CL21B562KBANNW# |
| 21  | 0.75                | 50                  | X7R | 6.8nF       | ±10%                  | CL21B682KBANNW# |
| 22  | 0.75                | 50                  | X7R | 8.2nF       | ±10%                  | CL21B822KBANNW# |
| 23  | 0.75                | 50                  | X7R | 10nF        | ±10%                  | CL21B103KBANNW# |
| 24  | 0.75                | 50                  | X7R | 15nF        | ±10%                  | CL21B153KBANNW# |
| 25  | 0.75                | 50                  | X7R | 18nF        | ±10%                  | CL21B183KBANNW# |
| 26  | 0.75                | 50                  | X7R | 22nF        | ±10%                  | CL21B223KBANNW# |
| 27  | 0.75                | 50                  | X7R | 27nF        | ±10%                  | CL21B273KBANNW# |
| 28  | 0.75                | 50                  | X7R | 39nF        | ±10%                  | CL21B393KBANNW# |
| 29  | 0.95                | 50                  | X7R | 47nF        | ±10%                  | CL21B473KBCNNW# |
| 30  | 0.95                | 50                  | X7R | 56nF        | ±10%                  | CL21B563KBCNNW# |
| 31  | 0.95                | 50                  | X7R | 68nF        | ±10%                  | CL21B683KBCNNW# |
| 32  | 0.95                | 50                  | X7R | 82nF        | ±10%                  | CL21B823KBCNNW# |
| 33  | 0.95                | 50                  | X7R | 100nF       | ±10%                  | CL21B104KBCNNW# |
| 34  | 1.35                | 50                  | X7R | 1uF         | ±10%                  | CL21B105KBFNNW# |
| 35  | 1.45                | 50                  | X7R | 2.2uF       | ±10%                  | CL21B225KBYNNW# |
| 36  | 0.75                | 100                 | X7R | 10nF        | ±10%                  | CL21B103KCANNW# |
| 37  | 1.45                | 100                 | X7S | 1uF         | ±10%                  | CL21Y105KCYZNW# |



# Normal Capacitors\_High Level I

Size Code (inch/mm) : 1206/3216

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number      |
|-----|---------------------|---------------------|-----|-------------|-----------------------|------------------|
| 1   | 1.80                | 4                   | X7S | 47uF        | ±20%                  | CL31Y476MRHNNW#  |
| 2   | 1.80                | 6.3                 | X7R | 22uF        | ±10%                  | CL31B226KQHNNW#  |
| 3   | 1.80                | 10                  | X7R | 22uF        | ±10%                  | CL31B226KPHNNW#  |
| 4   | 1.90                | 10                  | X7R | 22uF        | ±10%                  | CL31B226KPKZNNW# |
| 5   | 1.40                | 16                  | X7R | 220nF       | ±10%                  | CL31B224KOFNNW#  |
| 6   | 1.80                | 16                  | X7R | 470nF       | ±10%                  | CL31B474KOHNNW#  |
| 7   | 1.80                | 16                  | X7R | 680nF       | ±10%                  | CL31B684KOHNNW#  |
| 8   | 1.40                | 16                  | X7R | 1uF         | ±10%                  | CL31B105KOFNNW#  |
| 9   | 1.80                | 16                  | X7R | 2.2uF       | ±10%                  | CL31B225KOHNNW#  |
| 10  | 1.80                | 16                  | X7R | 10uF        | ±10%                  | CL31B106KOHNNW#  |
| 11  | 1.40                | 25                  | X7R | 220nF       | ±10%                  | CL31B224KAFNNW#  |
| 12  | 1.80                | 25                  | X7R | 470nF       | ±10%                  | CL31B474KAHNNW#  |
| 13  | 1.80                | 25                  | X7R | 680nF       | ±10%                  | CL31B684KAHNNW#  |
| 14  | 1.80                | 25                  | X7R | 1uF         | ±10%                  | CL31B105KAHNNW#  |
| 15  | 1.80                | 25                  | X7R | 1uF         | ±20%                  | CL31B105MAHNNW#  |
| 16  | 1.80                | 25                  | X7R | 2.2uF       | ±10%                  | CL31B225KAHNNW#  |
| 17  | 1.80                | 25                  | X7R | 4.7uF       | ±10%                  | CL31B475KAHNNW#  |
| 18  | 1.80                | 25                  | X7R | 10uF        | ±10%                  | CL31B106KAHNNW#  |
| 19  | 1.00                | 50                  | X7R | 100nF       | ±10%                  | CL31B104KBCNNW#  |
| 20  | 1.40                | 50                  | X7R | 330nF       | ±10%                  | CL31B334KBFNNW#  |
| 21  | 1.80                | 50                  | X7R | 470nF       | ±10%                  | CL31B474KBHNNW#  |
| 22  | 1.80                | 50                  | X7R | 1uF         | ±10%                  | CL31B105KBHNNW#  |
| 23  | 1.80                | 50                  | X7R | 2.2uF       | ±10%                  | CL31B225KBHNNW#  |
| 24  | 1.80                | 50                  | X7R | 4.7uF       | ±10%                  | CL31B475KBHNNW#  |
| 25  | 1.40                | 100                 | X7R | 10nF        | ±10%                  | CL31B103KCFNNW#  |
| 26  | 1.80                | 100                 | X7R | 2.2uF       | ±10%                  | CL31B225KCHZNNW# |
| 27  | 1.40                | 500                 | X7R | 470pF       | ±10%                  | CL31B471KGFNNW#  |
| 28  | 1.40                | 500                 | X7R | 680pF       | ±10%                  | CL31B681KGFNNW#  |
| 29  | 1.40                | 500                 | X7R | 2.2nF       | ±10%                  | CL31B222KGFNNW#  |
| 30  | 1.40                | 630                 | X7R | 470pF       | ±10%                  | CL31B471KHFNNW#  |
| 31  | 1.40                | 630                 | X7R | 680pF       | ±10%                  | CL31B681KHFNNW#  |
| 32  | 1.40                | 630                 | X7R | 1.5nF       | ±10%                  | CL31B152KHFNNW#  |
| 33  | 1.40                | 630                 | X7R | 2.2nF       | ±10%                  | CL31B222KHFNNW#  |
| 34  | 1.40                | 630                 | X7R | 3.3nF       | ±10%                  | CL31B332KHFNNW#  |
| 35  | 1.40                | 630                 | X7R | 4.7nF       | ±10%                  | CL31B472KHFNNW#  |
| 36  | 1.40                | 630                 | X7R | 6.8nF       | ±10%                  | CL31B682KHFNNW#  |
| 37  | 1.40                | 630                 | X7R | 10nF        | ±10%                  | CL31B103KHFNNW#  |



# Normal Capacitors\_High Level I

Size Code (inch/mm) : 1210/3225

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number      |
|-----|---------------------|---------------------|-----|-------------|-----------------------|------------------|
| 1   | 2.80                | 6.3                 | X7S | 100uF       | ±20%                  | CL32Y107MQVNNW#  |
| 2   | 2.80                | 10                  | X7R | 10uF        | ±10%                  | CL32B106KPVZNNW# |
| 3   | 2.70                | 16                  | X7R | 4.7uF       | ±10%                  | CL32B475KQJNNW#  |
| 4   | 2.80                | 16                  | X7R | 10uF        | ±10%                  | CL32B106KOVZNNW# |
| 5   | 2.00                | 25                  | X7R | 10uF        | ±10%                  | CL32B106KAULNNW# |
| 6   | 2.80                | 25                  | X7S | 22uF        | ±10%                  | CL32Y226KAVZNNW# |
| 7   | 2.70                | 50                  | X7R | 4.7uF       | ±10%                  | CL32B475KBJNNW#  |
| 8   | 2.80                | 50                  | X7R | 10uF        | ±10%                  | CL32B106KBVZNNW# |
| 9   | 2.70                | 100                 | X7R | 2.2uF       | ±10%                  | CL32B225KCJZNNW# |
| 10  | 2.20                | 100                 | X7R | 4.7uF       | ±10%                  | CL32B475KCIZNNW# |
| 11  | 2.20                | 100                 | X7S | 4.7uF       | ±10%                  | CL32Y475KCIZNNW# |
| 12  | 2.80                | 100                 | X7S | 10uF        | ±10%                  | CL32Y106KCVZNNW# |
| 13  | 2.20                | 630                 | X7R | 47nF        | ±10%                  | CL32B473KHINNW#  |
| 14  | 2.20                | 1000                | X7R | 22nF        | ±10%                  | CL32B223KIIZNNW# |

# Normal Capacitors\_High Level II

Normal  
High Level II

## Features

- A High Level II MLCC is a chip-type capacitor designed to be suitable for outdoor industrial applications.
- Reliability for moisture resistance and temperature change has been strengthened, and the bending strength characteristic is excellent.



- ① Ceramic Body
- ② Electrode (Ni/Cu\*)
- ③ Plating (Ni)
- ④ Termination (Cu or Cu+Metal Epoxy)
- ⑤ Plating (Sn)

High Level I

Improved Reliability  
(65°C, 90%RH, 1Vr, 500H)

High Level II

Reinforced Reliability  
(85°C, 85%RH, 1Vr, 1000H)

\* Internal Cu electrode is only applied to limited products.

## Application

- Base station, Solar Inverter, DC-DC Converter

## Structure and Dimensions



| Size Code | Dimension (mm) |           |           |              | EIA (inch) |
|-----------|----------------|-----------|-----------|--------------|------------|
|           | L              | W         | T         | BW           |            |
| 03        | 0.60±0.03      | 0.30±0.03 | 0.30±0.03 | 0.15±0.05    | 0603       |
| 05        | 1.00±0.05      | 0.50±0.05 | 0.50±0.05 | 0.25±0.10    | 0402       |
| 10        | 1.60±0.10      | 0.80±0.10 | 0.80±0.10 | 0.30±0.20    | 0603       |
| 21        | 2.00±0.10      | 1.25±0.10 | 1.25±0.10 | 0.5+0.2/-0.3 | 0805       |
| 31        | 3.20±0.20      | 1.60±0.20 | 1.60±0.20 | 0.50±0.30    | 1206       |
|           | 3.20±0.30      | 1.60±0.30 | 1.60±0.30 |              |            |
| 32        | 3.20±0.30      | 2.50±0.20 | 2.00±0.20 | 0.60±0.30    | 1210       |
|           | 3.20±0.30      | 2.50±0.30 | 2.50±0.30 |              |            |

## Capacitance Table (COG)

| Category      | TCC         | Size Code (inch/mm) | Rated Voltage (Vdc) | Capacitance |   |    |     |   |    |     |   |    | Capacitance Range |     |             |             |               |
|---------------|-------------|---------------------|---------------------|-------------|---|----|-----|---|----|-----|---|----|-------------------|-----|-------------|-------------|---------------|
|               |             |                     |                     | pF          |   |    | nF  |   |    | uF  |   |    |                   |     |             |             |               |
|               |             |                     |                     | 0.1         | 1 | 10 | 100 | 1 | 10 | 100 | 1 | 10 |                   | 100 |             |             |               |
| High Level II | COG (125°C) | 0402/1005           | 50                  |             |   |    |     |   |    |     |   |    |                   |     |             | 3.3pF - 1nF |               |
|               |             |                     | 25                  |             |   |    |     |   |    |     |   |    |                   |     |             |             | 1nF - 6.8nF   |
|               |             | 0603/1608           | 50                  |             |   |    |     |   |    |     |   |    |                   |     |             |             | 22pF - 3.3nF  |
|               |             |                     | 100                 |             |   |    |     |   |    |     |   |    |                   |     |             |             | 100pF - 4.7nF |
|               |             | 1206/3216           | 50                  |             |   |    |     |   |    |     |   |    |                   |     |             |             | 47nF - 100nF  |
|               |             |                     | 630                 |             |   |    |     |   |    |     |   |    |                   |     |             |             | 10nF - 10nF   |
|               |             |                     | 1000                |             |   |    |     |   |    |     |   |    |                   |     |             |             | 680pF - 1nF   |
|               |             |                     | 630                 |             |   |    |     |   |    |     |   |    |                   |     |             |             | 22nF - 33nF   |
| 1210/3225     | 630         |                     |                     |             |   |    |     |   |    |     |   |    |                   |     | 22nF - 33nF |             |               |
|               | 1000        |                     |                     |             |   |    |     |   |    |     |   |    |                   |     | 10nF - 22nF |             |               |

## Capacitance Table (X5R)

| Category      | TCC        | Size Code (inch/mm) | Rated Voltage (Vdc) | Capacitance |   |    |     |   |    |     |   |    | Capacitance Range |     |  |               |             |
|---------------|------------|---------------------|---------------------|-------------|---|----|-----|---|----|-----|---|----|-------------------|-----|--|---------------|-------------|
|               |            |                     |                     | pF          |   |    | nF  |   |    | uF  |   |    |                   |     |  |               |             |
|               |            |                     |                     | 0.1         | 1 | 10 | 100 | 1 | 10 | 100 | 1 | 10 |                   | 100 |  |               |             |
| High Level II | X5R (85°C) | 0603/1608           | 6.3                 |             |   |    |     |   |    |     |   |    |                   |     |  | 4.7uF - 4.7uF |             |
|               |            |                     | 10                  |             |   |    |     |   |    |     |   |    |                   |     |  | 1uF - 10uF    |             |
|               |            |                     | 16                  |             |   |    |     |   |    |     |   |    |                   |     |  |               | 1uF - 1uF   |
|               |            |                     | 25                  |             |   |    |     |   |    |     |   |    |                   |     |  |               | 1uF - 1uF   |
|               |            | 0805/2012           | 6.3                 |             |   |    |     |   |    |     |   |    |                   |     |  |               | 22uF - 22uF |



# Normal Capacitors\_High Level II

## Capacitance Table (X6S)

| Category      | TCC         | Size Code (inch/mm) | Rated Voltage (Vdc) | Capacitance |   |    |     |   |    |     |   |    | Capacitance Range |     |  |  |  |  |  |  |             |               |
|---------------|-------------|---------------------|---------------------|-------------|---|----|-----|---|----|-----|---|----|-------------------|-----|--|--|--|--|--|--|-------------|---------------|
|               |             |                     |                     | pF          |   |    | nF  |   |    | uF  |   |    |                   |     |  |  |  |  |  |  |             |               |
|               |             |                     |                     | 0.1         | 1 | 10 | 100 | 1 | 10 | 100 | 1 | 10 |                   | 100 |  |  |  |  |  |  |             |               |
| High Level II | X6S (105°C) | 0805/2012           | 4                   |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  | 47uF - 47uF |               |
|               |             |                     | 25                  |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  |             | 4.7uF - 4.7uF |
|               |             | 1206/3216           | 6.3                 |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  |             | 100uF - 100uF |
|               |             | 1210/3225           | 2.5                 |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  |             | 330uF - 330uF |

## Capacitance Table (X7R)

| Category      | TCC         | Size Code (inch/mm) | Rated Voltage (Vdc) | Capacitance |   |    |     |   |    |     |   |    | Capacitance Range |     |  |  |  |  |  |             |               |               |
|---------------|-------------|---------------------|---------------------|-------------|---|----|-----|---|----|-----|---|----|-------------------|-----|--|--|--|--|--|-------------|---------------|---------------|
|               |             |                     |                     | pF          |   |    | nF  |   |    | uF  |   |    |                   |     |  |  |  |  |  |             |               |               |
|               |             |                     |                     | 0.1         | 1 | 10 | 100 | 1 | 10 | 100 | 1 | 10 |                   | 100 |  |  |  |  |  |             |               |               |
| High Level II | X7R (125°C) | 0201/0603           | 10                  |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |             | 100nF - 100nF |               |
|               |             |                     | 25                  |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |             |               | 100nF - 100nF |
|               |             | 0402/1005           | 50                  |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |             |               | 4.7nF - 100nF |
|               |             |                     | 10                  |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |             |               | 1uF - 2.2uF   |
|               |             | 0603/1608           | 16                  |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |             |               | 1uF - 1uF     |
|               |             |                     | 25                  |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |             |               | 8.2nF - 1uF   |
|               |             |                     | 50                  |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |             |               | 270pF - 47nF  |
|               |             |                     | 100                 |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |             |               | 100nF - 100nF |
|               |             | 0805/2012           | 16                  |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |             |               | 10uF - 10uF   |
|               |             |                     | 25                  |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |             |               | 10uF - 10uF   |
| 1206/3216     | 50          |                     |                     |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  | 1uF - 1uF   |               |               |
|               | 10          |                     |                     |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  | 47uF - 47uF |               |               |

## Capacitance Table (X7S)

| Category      | TCC         | Size Code (inch/mm) | Rated Voltage (Vdc) | Capacitance |   |    |     |   |    |     |   |    | Capacitance Range |     |  |  |  |  |  |               |               |               |
|---------------|-------------|---------------------|---------------------|-------------|---|----|-----|---|----|-----|---|----|-------------------|-----|--|--|--|--|--|---------------|---------------|---------------|
|               |             |                     |                     | pF          |   |    | nF  |   |    | uF  |   |    |                   |     |  |  |  |  |  |               |               |               |
|               |             |                     |                     | 0.1         | 1 | 10 | 100 | 1 | 10 | 100 | 1 | 10 |                   | 100 |  |  |  |  |  |               |               |               |
| High Level II | X7S (125°C) | 0201/0603           | 10                  |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |               | 100nF - 100nF |               |
|               |             | 0603/1608           | 10                  |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |               |               | 4.7uF - 4.7uF |
|               |             |                     | 16                  |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |               |               | 4.7uF - 4.7uF |
|               |             | 0805/2012           | 25                  |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |               |               | 4.7uF - 4.7uF |
|               |             | 1206/3216           | 4                   |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |               |               | 47uF - 47uF   |
| 1210/3225     | 6.3         |                     |                     |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  | 100uF - 100uF |               |               |

## Capacitance Table (X7T)

| Category      | TCC         | Size Code (inch/mm) | Rated Voltage (Vdc) | Capacitance |   |    |     |   |    |     |   |    | Capacitance Range |     |  |  |  |  |  |  |             |               |
|---------------|-------------|---------------------|---------------------|-------------|---|----|-----|---|----|-----|---|----|-------------------|-----|--|--|--|--|--|--|-------------|---------------|
|               |             |                     |                     | pF          |   |    | nF  |   |    | uF  |   |    |                   |     |  |  |  |  |  |  |             |               |
|               |             |                     |                     | 0.1         | 1 | 10 | 100 | 1 | 10 | 100 | 1 | 10 |                   | 100 |  |  |  |  |  |  |             |               |
| High Level II | X7T (125°C) | 0603/1608           | 6.3                 |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  | 10uF - 10uF |               |
|               |             |                     | 10                  |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  |             | 10uF - 10uF   |
|               |             | 1206/3216           | 4                   |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  |             | 100uF - 100uF |
|               |             |                     | 6.3                 |             |   |    |     |   |    |     |   |    |                   |     |  |  |  |  |  |  |             |               |



# Normal Capacitors\_High Level II

## Product Lineup (COG)

Size Code (inch/mm) : 0402/1005, 0603/1608

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 0.55                | 50                  | COG | 5.6pF       | ±0.25pF               | CL05C5R6CB5N4N# |
| 2   | 0.55                | 50                  | COG | 47pF        | ±5%                   | CL05C470JB5N4N# |
| 3   | 0.55                | 50                  | COG | 100pF       | ±5%                   | CL05C101JB5N4N# |
| 4   | 0.55                | 50                  | COG | 330pF       | ±5%                   | CL05C331JB5N4N# |
| 5   | 0.55                | 50                  | COG | 1nF         | ±5%                   | CL05C102JB5N4N# |
| 6   | 0.90                | 25                  | COG | 1nF         | ±5%                   | CL10C102JA8N4N# |
| 7   | 0.90                | 50                  | COG | 22pF        | ±5%                   | CL10C220JB8N4N# |
| 8   | 0.90                | 50                  | COG | 33pF        | ±5%                   | CL10C330JB8N4N# |
| 9   | 0.90                | 50                  | COG | 68pF        | ±5%                   | CL10C680JB8N4N# |
| 10  | 0.90                | 50                  | COG | 100pF       | ±5%                   | CL10C101JB8N4N# |
| 11  | 0.90                | 50                  | COG | 120pF       | ±5%                   | CL10C121JB8N4N# |
| 12  | 0.90                | 50                  | COG | 150pF       | ±5%                   | CL10C151JB8N4N# |
| 13  | 0.90                | 50                  | COG | 150pF       | ±10%                  | CL10C151KB8N4N# |
| 14  | 0.90                | 50                  | COG | 220pF       | ±5%                   | CL10C221JB8N4N# |
| 15  | 0.90                | 50                  | COG | 330pF       | ±5%                   | CL10C331JB8N4N# |
| 16  | 0.90                | 50                  | COG | 330pF       | ±10%                  | CL10C331KB8N4N# |
| 17  | 0.90                | 50                  | COG | 390pF       | ±5%                   | CL10C391JB8N4N# |
| 18  | 0.90                | 50                  | COG | 470pF       | ±5%                   | CL10C471JB8N4N# |
| 19  | 0.90                | 50                  | COG | 560pF       | ±5%                   | CL10C561JB8N4N# |
| 20  | 0.90                | 50                  | COG | 680pF       | ±5%                   | CL10C681JB8N4N# |
| 21  | 0.90                | 50                  | COG | 820pF       | ±5%                   | CL10C821JB8N4N# |
| 22  | 0.90                | 50                  | COG | 1.2nF       | ±5%                   | CL10C122JB8N4N# |
| 23  | 0.90                | 50                  | COG | 1.8nF       | ±5%                   | CL10C182JB8N4N# |
| 24  | 0.90                | 50                  | COG | 2.2nF       | ±5%                   | CL10C222JB8N4N# |
| 25  | 0.90                | 50                  | COG | 3.3nF       | ±5%                   | CL10C332JB8N4N# |
| 26  | 0.90                | 100                 | COG | 100pF       | ±5%                   | CL10C101JC8N4N# |

Size Code (inch/mm) : 1210/3225

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 2.70                | 1000                | COG | 10nF        | ±5%                   | CL32C103JIJN4N# |
| 2   | 2.70                | 1000                | COG | 15nF        | ±5%                   | CL32C153JIJN4N# |
| 3   | 2.80                | 1000                | COG | 22nF        | ±5%                   | CL32C223JIVN4N# |



# Normal Capacitors\_High Level II

## Product Lineup (X5R)

Size Code (inch/mm) : 0603/1608, 0805/2012

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 0.90                | 6.3                 | X5R | 4.7uF       | ±10%                  | CL10A475KQ8N4N# |
| 2   | 0.90                | 6.3                 | X5R | 4.7uF       | ±20%                  | CL10A475MQ8N4N# |
| 3   | 0.90                | 10                  | X5R | 1uF         | ±10%                  | CL10A105KP8N4N# |
| 4   | 0.90                | 10                  | X5R | 4.7uF       | ±10%                  | CL10A475KP8N4N# |
| 5   | 0.95                | 10                  | X5R | 10uF        | ±10%                  | CL10A106KP8N4Q# |
| 6   | 0.90                | 16                  | X5R | 1uF         | ±10%                  | CL10A105K08N4N# |
| 7   | 0.90                | 25                  | X5R | 1uF         | ±10%                  | CL10A105KA8N4N# |
| 8   | 1.40                | 6.3                 | X5R | 22uF        | ±20%                  | CL21A226MQQN4N# |

## Product Lineup (X6S)

Size Code (inch/mm) : 1206/3216

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 1.90                | 6.3                 | X6S | 100uF       | ±20%                  | CL31X107MQKN4N# |

Size Code (inch/mm) : 1210/3225

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 2.80                | 2.5                 | X6S | 330uF       | ±20%                  | CL32X337MSVN4S# |

## Product Lineup (X7R/S)

Size Code (inch/mm) : 0402/1005, 1210/3225

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 0.33                | 10                  | X7R | 100nF       | ±10%                  | CL03B104KP3N4N# |
| 2   | 0.33                | 10                  | X7S | 100nF       | ±10%                  | CL03Y104KP3N4N# |
| 3   | 0.55                | 10                  | X7R | 470nF       | ±10%                  | CL05B474KP5Z4N# |
| 4   | 0.55                | 16                  | X7R | 22nF        | ±10%                  | CL05B223K05Z4N# |
| 5   | 0.55                | 16                  | X7R | 100nF       | ±10%                  | CL05B104K05Z4N# |
| 6   | 0.55                | 25                  | X7R | 100nF       | ±10%                  | CL05B104KA5N4N# |
| 7   | 0.55                | 50                  | X7R | 1nF         | ±10%                  | CL05B102KB5Z4N# |
| 8   | 0.55                | 50                  | X7R | 4.7nF       | ±10%                  | CL05B472KB5S4N# |
| 9   | 0.55                | 50                  | X7R | 100nF       | ±10%                  | CL05B104KB5N4N# |
| 10  | 0.90                | 10                  | X7R | 1uF         | ±10%                  | CL10B105KP8N4N# |
| 11  | 0.90                | 10                  | X7R | 2.2uF       | ±10%                  | CL10B225KP8N4N# |
| 12  | 0.90                | 16                  | X7R | 1uF         | ±10%                  | CL10B105K08N4N# |
| 13  | 0.90                | 25                  | X7R | 100nF       | ±10%                  | CL10B104KA8Z4N# |
| 14  | 0.90                | 25                  | X7R | 220nF       | ±10%                  | CL10B224KA8Z4N# |
| 15  | 0.90                | 25                  | X7R | 1uF         | ±10%                  | CL10B105KA8N4N# |



# Normal Capacitors\_High Level II

Size Code (inch/mm) : 0402/1005, 1210/3225

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 16  | 0.90                | 25                  | X7R | 1uF         | ±10%                  | CL10B105KA8Z4N# |
| 17  | 0.90                | 50                  | X7R | 1nF         | ±10%                  | CL10B102KB8Z4N# |
| 18  | 0.90                | 50                  | X7R | 6.8nF       | ±10%                  | CL10B682KB8N4N# |
| 19  | 0.90                | 50                  | X7R | 47nF        | ±10%                  | CL10B473KB8N4N# |
| 20  | 0.90                | 50                  | X7R | 100nF       | ±10%                  | CL10B104KB8Z4N# |
| 21  | 0.90                | 50                  | X7R | 220nF       | ±10%                  | CL10B224KB8Z4J# |
| 22  | 0.90                | 100                 | X7R | 100nF       | ±10%                  | CL10B104KC8N4N# |
| 23  | 1.50                | 16                  | X7S | 10uF        | ±20%                  | CL21Y106MOYZ4U# |
| 24  | 1.35                | 25                  | X7R | 1uF         | ±10%                  | CL21B105KAFZ4N# |
| 25  | 1.35                | 25                  | X7R | 2.2uF       | ±10%                  | CL21B225KAFZ4J# |
| 26  | 1.45                | 25                  | X7S | 4.7uF       | ±10%                  | CL21Y475KAYN4N# |
| 27  | 1.35                | 100                 | X7R | 100nF       | ±10%                  | CL21B104KCFZ4N# |
| 28  | 1.45                | 100                 | X7S | 1uF         | ±10%                  | CL21Y105KCYZ4N# |
| 29  | 1.90                | 6.3                 | X7R | 22uF        | ±10%                  | CL31B226KQKZ4N# |
| 30  | 1.90                | 6.3                 | X7T | 47uF        | ±20%                  | CL31Z476MQKN4N# |
| 31  | 1.80                | 10                  | X7R | 10uF        | ±10%                  | CL31B106KPHZ4N# |
| 32  | 1.90                | 10                  | X7R | 22uF        | ±10%                  | CL31B226KPKZ4N# |
| 33  | 1.80                | 25                  | X7R | 10uF        | ±10%                  | CL31B106KAHN4N# |
| 34  | 1.80                | 50                  | X7R | 1uF         | ±10%                  | CL31B105KBHN4N# |
| 35  | 1.80                | 100                 | X7R | 1uF         | ±10%                  | CL31B105KCHZ4N# |
| 36  | 1.80                | 100                 | X7R | 2.2uF       | ±10%                  | CL31B225KCHZ4N# |
| 37  | 1.80                | 100                 | X7S | 2.2uF       | ±10%                  | CL31Y225KCHZ4N# |
| 38  | 1.90                | 100                 | X7S | 4.7uF       | ±10%                  | CL31Y475KCK64N# |
| 39  | 1.90                | 100                 | X7S | 4.7uF       | ±10%                  | CL31Y475KCK6NW# |
| 40  | 2.80                | 6.3                 | X7S | 100uF       | ±20%                  | CL32Y107MQVN4N# |
| 41  | 2.80                | 50                  | X7R | 10uF        | ±10%                  | CL32B106KBVZ4N# |
| 42  | 2.70                | 100                 | X7R | 2.2uF       | ±10%                  | CL32B225KCJZ4N# |
| 43  | 2.70                | 100                 | X7R | 4.7uF       | ±10%                  | CL32B475KCJZ4N# |
| 44  | 2.20                | 100                 | X7S | 4.7uF       | ±10%                  | CL32Y475KCIZ4N# |
| 45  | 2.70                | 100                 | X7S | 4.7uF       | ±10%                  | CL32Y475KCJZ4N# |
| 46  | 2.80                | 100                 | X7S | 10uF        | ±10%                  | CL32Y106KCVZ4N# |

## Product Lineup (X8L)


Size Code (inch/mm) : 1210/3225

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 2.70                | 100                 | X8L | 4.7uF       | ±10%                  | CL32E475KCJZ4N# |

# Molded Frame Capacitors (MFC)

## Features

- Advanced solution beyond standard metal frame capacitor.
- Samsung MFC has a greater reliability than a general MLCC.
- High solder crack resistance at thermal cycling test.
- High board bending strength up to 10mm (specification: 5mm)
- Enhanced moisture resistance by Epoxy molding compound
- Acoustic noise reduction. (piezoelectric effect)
- Low ESR Metal frame plating(Material:Cu,Ni,Pd,Au)

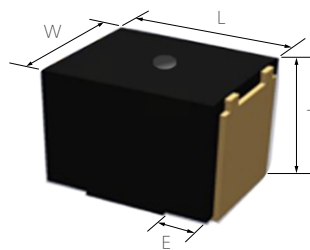

## Application

- Power, DC-DC Converter where bending stress is high and high reliability is necessary.

## Specifications

| Samsung P/N     | Dimension (mm) |           |           |           |
|-----------------|----------------|-----------|-----------|-----------|
|                 | L              | W         | T         | E         |
| CL32B225KCDMNWF | 3.80±0.10      | 2.80±0.10 | 3.35±0.10 | 0.80±0.15 |
| CL32Y225KCDMNWF | 3.80±0.10      | 2.80±0.10 | 3.35±0.10 | 0.80±0.15 |

### Land Dimension

(Unit : mm)

| Chip Size              | Chip Tol. | a       | b       | c         | (a+2b)min | (a+2b)max | Wmin | Wmax |
|------------------------|-----------|---------|---------|-----------|-----------|-----------|------|------|
| 1210<br>(EIA code) MFC | ±0.10     | 2.0~2.2 | 1.1~1.3 | 2.30~2.50 | 4.20      | 4.80      | 2.70 | 2.90 |

## Product LineUp

Size Code (inch/mm) : 1210/3225

| No. | Thickness Max.<br>(mm) | Rated Voltage<br>(Vdc) | TCC | Capacitance | Capacitance<br>Tolerance | Part Number     |
|-----|------------------------|------------------------|-----|-------------|--------------------------|-----------------|
| 1   | 0.45                   | 100                    | X7S | 4.7uF       | ±10%                     | CL32Y475KCDMNW# |
| 2   | 0.45                   | 100                    | X7R | 2.2uF       | ±10%                     | CL32B225KCDMNW# |

# Land Side Capacitors (LSC) Land Side

## Features

- This can be mounted between the solder balls to deal with thin devices or modules.
- It can reduce the thickness of the module.
- It can quickly supply stable current to high-speed AP of mobile devices.
- In addition it helps remove high-frequency noise, suffering less from external environmental stress.




## Application

- Smart Phone, Wearable Devices, IC Package, Module Products

## Structure and Dimensions



| Size Code | Dimension (mm) |           |               |                |             | EIA (inch) |
|-----------|----------------|-----------|---------------|----------------|-------------|------------|
|           | L              | W         | T             | Thickness Code | BW          |            |
| 02        | 0.40±0.02      | 0.20±0.02 | 0.095±0.015   | L              | 0.10±0.03   | 01005      |
| 05        | 1.00±0.05      | 0.50±0.05 | 0.0975±0.0125 | L              | 0.250±0.075 | 0402       |
|           | 1.00±0.05      | 0.50±0.05 | 0.20±0.02     | 2              | 0.25±0.10   | 0402       |
| L3        | 0.30±0.03      | 0.60±0.03 | 0.18±0.02     | W              | 0.10±0.03   | 0102       |
| L5        | 0.52±0.05      | 1.00±0.05 | 0.085±0.015   | J              | 0.145±0.050 | 0204       |



# Land Side Capacitors (LSC)

## Capacitance Table (X5R)

| TCC         | Size Code (inch/mm) | Rated Voltage (Vdc) | Capacitance |   |    |     |   |    |     |   |    | Capacitance Range |     |  |  |  |               |
|-------------|---------------------|---------------------|-------------|---|----|-----|---|----|-----|---|----|-------------------|-----|--|--|--|---------------|
|             |                     |                     | pF          |   |    | nF  |   |    | uF  |   |    |                   |     |  |  |  |               |
|             |                     |                     | 0.1         | 1 | 10 | 100 | 1 | 10 | 100 | 1 | 10 |                   | 100 |  |  |  |               |
| X5R (85°C)  | 0102/0306           | 25                  |             |   |    |     |   |    |     |   |    |                   |     |  |  |  | 22nF - 33nF   |
|             | 01005/0402          | 6.3                 |             |   |    |     |   |    |     |   |    |                   |     |  |  |  | 51pF - 1nF    |
|             | 0402/1005           | 6.3                 |             |   |    |     |   |    |     |   |    |                   |     |  |  |  | 220nF - 220nF |
| X7T (125°C) | 0204/0510           | 2.5                 |             |   |    |     |   |    |     |   |    |                   |     |  |  |  | 1uF - 1uF     |

## Product Lineup (X5R)

Size Code (inch/mm) : 0102/0306

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 0.235               | 25                  | X5R | 33nF        | ±10%                  | CLL3A333KAYHLN# |
| 2   | 0.20                | 25                  | X5R | 22nF        | ±10%                  | CLL3A223KAWHLN# |

Size Code (inch/mm) : 01005/0402

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 0.11                | 6.3                 | X5R | 51pF        | ±20%                  | CL02A510MQLHNN# |
| 2   | 0.11                | 6.3                 | X5R | 680pF       | ±20%                  | CL02A681MQLHNN# |
| 3   | 0.11                | 6.3                 | X5R | 1nF         | ±20%                  | CL02A102MQLHNN# |

Size Code (inch/mm) : 0402/1005

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 0.10                | 6.3                 | X5R | 220nF       | ±20%                  | CL05A224MQLHEC# |

## Product Lineup (X7T)

Size Code (inch/mm) : 0204/0510

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 0.22                | 2.5                 | X7T | 1uF         | ±20%                  | CLL5Z105MS2HLN# |

# High Bending Strength Capacitors

High Bending Strength

## Features

- The mechanical stress on the chip can be absorbed by the characteristic of Soft Termination.
- It is also resistant to stress caused by board bending.



- ① Ni/Sn
- ② Metal/Epoxy Termination
- ③ Cu-Term

## Application

- All Application (Smart Phone, PC, HDD/SSD Board, Tablet, Display, Etc), Power (SMPS, DC-DC Converter), Industrial Application

## Structure and Dimensions



| Size Code | Dimension (mm) |           |           |                |               | EIA (inch) |
|-----------|----------------|-----------|-----------|----------------|---------------|------------|
|           | L              | W         | T         | Thkckness Code | BW            |            |
| 03        | 0.60±0.03      | 0.30±0.03 | 0.30±0.03 | 3              | 0.15±0.05     | 0201       |
| 05        | 1.00±0.05      | 0.50±0.05 | 0.50±0.05 | 5              | 0.25±0.10     | 0402       |
| 10        | 1.60±0.10      | 0.80±0.10 | 0.80±0.10 | 8              | 0.30±0.20     | 0603       |
| 21        | 2.00±0.10      | 1.25±0.10 | 0.85±0.10 | C              | 0.50+0.2/-0.3 | 0805       |
|           | 2.00±0.10      | 1.25±0.10 | 1.25±0.10 | F              |               |            |
|           | 2.00±0.15      | 1.25±0.15 | 1.25±0.15 | Q              |               |            |
| 31        | 3.20±0.15      | 1.60±0.15 | 1.25±0.15 | F              | 0.50±0.30     | 1206       |
|           | 3.20±0.20      | 1.60±0.20 | 1.60±0.20 | H              |               |            |
| 32        | 3.20±0.30      | 2.50±0.20 | 1.60±0.10 | T              | 0.60±0.30     | 1210       |
|           | 3.20±0.30      | 2.50±0.20 | 2.50±0.20 | J              |               |            |
|           | 3.20±0.40      | 2.50±0.30 | 2.50±0.30 | V              |               |            |

## Capacitance Table (X5R)

| TCC        | Size Code (inch/mm) | Rated Voltage (Vdc) | Capacitance |   |    |     |   |    |     |   |    |     | Capacitance Range |  |              |
|------------|---------------------|---------------------|-------------|---|----|-----|---|----|-----|---|----|-----|-------------------|--|--------------|
|            |                     |                     | pF          |   |    | nF  |   |    | uF  |   |    |     |                   |  |              |
|            |                     |                     | 0.1         | 1 | 10 | 100 | 1 | 10 | 100 | 1 | 10 | 100 |                   |  |              |
| X5R (85°C) | 0201/0603           | 10                  |             |   |    |     |   |    |     |   |    |     |                   |  | 100nF - 1uF  |
|            |                     | 6.3                 |             |   |    |     |   |    |     |   |    |     |                   |  | 4.7uF - 22uF |
|            | 0402/1005           | 10                  |             |   |    |     |   |    |     |   |    |     |                   |  | 2.2uF - 10uF |
|            |                     | 6.3                 |             |   |    |     |   |    |     |   |    |     |                   |  | 10uF - 10uF  |
|            |                     | 10                  |             |   |    |     |   |    |     |   |    |     |                   |  | 22uF - 22uF  |



# High Bending Strength Capacitors

## Capacitance Table (X6S)

| TCC         | Size Code (inch/mm) | Rated Voltage (Vdc) | Capacitance |   |    |     |    |    |     |   |    |     |  |  | Capacitance Range |  |  |  |             |
|-------------|---------------------|---------------------|-------------|---|----|-----|----|----|-----|---|----|-----|--|--|-------------------|--|--|--|-------------|
|             |                     |                     | pF          |   |    |     | nF |    |     |   | uF |     |  |  |                   |  |  |  |             |
|             |                     |                     | 0.1         | 1 | 10 | 100 | 1  | 10 | 100 | 1 | 10 | 100 |  |  |                   |  |  |  |             |
| X6S (105°C) | 1210/3225           | 16                  |             |   |    |     |    |    |     |   |    |     |  |  |                   |  |  |  | 47uF - 47uF |

## Capacitance Table (X7S)

| TCC         | Size Code (inch/mm) | Rated Voltage (Vdc) | Capacitance |   |    |     |    |    |     |   |    |     |  |  | Capacitance Range |  |  |              |               |
|-------------|---------------------|---------------------|-------------|---|----|-----|----|----|-----|---|----|-----|--|--|-------------------|--|--|--------------|---------------|
|             |                     |                     | pF          |   |    |     | nF |    |     |   | uF |     |  |  |                   |  |  |              |               |
|             |                     |                     | 0.1         | 1 | 10 | 100 | 1  | 10 | 100 | 1 | 10 | 100 |  |  |                   |  |  |              |               |
| X7S (125°C) | 0805/2012           | 16                  |             |   |    |     |    |    |     |   |    |     |  |  |                   |  |  |              | 10uF - 10uF   |
|             |                     | 100                 |             |   |    |     |    |    |     |   |    |     |  |  |                   |  |  |              | 220nF / 1uF   |
|             | 1206/3216           | 16                  |             |   |    |     |    |    |     |   |    |     |  |  |                   |  |  |              | 22uF - 22uF   |
|             |                     | 25                  |             |   |    |     |    |    |     |   |    |     |  |  |                   |  |  |              | 22uF - 22uF   |
|             |                     | 100                 |             |   |    |     |    |    |     |   |    |     |  |  |                   |  |  |              | 2.2uF - 4.7uF |
| 1210/3225   | 100                 |                     |             |   |    |     |    |    |     |   |    |     |  |  |                   |  |  | 4.7uF - 10uF |               |

## Capacitance Table (X7R)

| TCC         | Size Code (inch/mm) | Rated Voltage (Vdc) | Capacitance |   |    |     |    |    |     |   |    |     |  |  | Capacitance Range |  |            |               |               |
|-------------|---------------------|---------------------|-------------|---|----|-----|----|----|-----|---|----|-----|--|--|-------------------|--|------------|---------------|---------------|
|             |                     |                     | pF          |   |    |     | nF |    |     |   | uF |     |  |  |                   |  |            |               |               |
|             |                     |                     | 0.1         | 1 | 10 | 100 | 1  | 10 | 100 | 1 | 10 | 100 |  |  |                   |  |            |               |               |
| X7R (125°C) | 0402/1005           | 10                  |             |   |    |     |    |    |     |   |    |     |  |  |                   |  |            |               | 220nF - 470nF |
|             |                     | 16                  |             |   |    |     |    |    |     |   |    |     |  |  |                   |  |            |               | 22nF - 100nF  |
|             |                     | 50                  |             |   |    |     |    |    |     |   |    |     |  |  |                   |  |            |               | 1nF - 15nF    |
|             | 0603/1608           | 25                  |             |   |    |     |    |    |     |   |    |     |  |  |                   |  |            |               | 100nF - 1uF   |
|             |                     | 50                  |             |   |    |     |    |    |     |   |    |     |  |  |                   |  |            |               | 1nF - 1uF     |
|             |                     | 100                 |             |   |    |     |    |    |     |   |    |     |  |  |                   |  |            |               | 1nF - 1nF     |
|             | 0805/2012           | 25                  |             |   |    |     |    |    |     |   |    |     |  |  |                   |  |            |               | 1uF - 2.2uF   |
|             |                     | 100                 |             |   |    |     |    |    |     |   |    |     |  |  |                   |  |            |               | 10nF - 220nF  |
|             |                     | 250                 |             |   |    |     |    |    |     |   |    |     |  |  |                   |  |            |               | 1nF / 22nF    |
|             | 1206/3216           | 6.3                 |             |   |    |     |    |    |     |   |    |     |  |  |                   |  |            |               | 22uF - 22uF   |
|             |                     | 10                  |             |   |    |     |    |    |     |   |    |     |  |  |                   |  |            |               | 10uF - 22uF   |
|             |                     | 25                  |             |   |    |     |    |    |     |   |    |     |  |  |                   |  |            |               | 4.7uF - 10uF  |
|             |                     | 35                  |             |   |    |     |    |    |     |   |    |     |  |  |                   |  |            |               | 10uF - 10uF   |
|             |                     | 100                 |             |   |    |     |    |    |     |   |    |     |  |  |                   |  |            |               | 1uF - 2.2uF   |
|             |                     | 250                 |             |   |    |     |    |    |     |   |    |     |  |  |                   |  |            |               | 100nF - 100nF |
| 630         |                     |                     |             |   |    |     |    |    |     |   |    |     |  |  |                   |  |            | 1nF - 22nF    |               |
| 1000        |                     |                     |             |   |    |     |    |    |     |   |    |     |  |  |                   |  | 1nF - 10nF |               |               |
| 1210/3225   | 50                  |                     |             |   |    |     |    |    |     |   |    |     |  |  |                   |  |            | 4.7uF - 10uF  |               |
|             | 100                 |                     |             |   |    |     |    |    |     |   |    |     |  |  |                   |  |            | 2.2uF - 4.7uF |               |
|             | 250                 |                     |             |   |    |     |    |    |     |   |    |     |  |  |                   |  |            | 220nF - 220nF |               |
|             | 1000                |                     |             |   |    |     |    |    |     |   |    |     |  |  |                   |  |            | 22nF - 22nF   |               |



# High Bending Strength Capacitors

## Capacitance Table (X8L)

| TCC         | Size Code (inch/mm) | Rated Voltage (Vdc) | Capacitance |   |    |     |    |    |     |   |    |     |  |  | Capacitance Range |  |  |  |               |
|-------------|---------------------|---------------------|-------------|---|----|-----|----|----|-----|---|----|-----|--|--|-------------------|--|--|--|---------------|
|             |                     |                     | pF          |   |    |     | nF |    |     |   | uF |     |  |  |                   |  |  |  |               |
|             |                     |                     | 0.1         | 1 | 10 | 100 | 1  | 10 | 100 | 1 | 10 | 100 |  |  |                   |  |  |  |               |
| X8L (150°C) | 1210/3225           | 100                 |             |   |    |     |    |    |     |   |    |     |  |  |                   |  |  |  | 4.7uF - 4.7uF |

## Product Lineup (X5R)

Size Code (inch/mm) : 0201/0603

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 0.33                | 10                  | X5R | 100nF       | ±10%                  | CL03A104KP3ZNN# |
| 2   | 0.35                | 10                  | X5R | 1uF         | ±20%                  | CL03A105MP3ZSN# |

Size Code (inch/mm) : 0402/1005

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 0.57                | 10                  | X5R | 2.2uF       | ±10%                  | CL05A225KP5ZSN# |
| 2   | 0.65                | 6.3                 | X5R | 4.7uF       | ±20%                  | CL05A475MQ5ZRN# |
| 3   | 0.65                | 10                  | X5R | 4.7uF       | ±10%                  | CL05A475KP5ZRN# |
| 4   | 0.70                | 6.3                 | X5R | 10uF        | ±20%                  | CL05A106MQ5ZUN# |
| 5   | 0.70                | 10                  | X5R | 10uF        | ±20%                  | CL05A106MP5ZUN# |

Size Code (inch/mm) : 0603/1608

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 0.95                | 6.3                 | X5R | 10uF        | ±20%                  | CL10A106MQ8ZQN# |
| 2   | 1.05                | 10                  | X5R | 22uF        | ±20%                  | CL10A226MP8ZUN# |

## Product Lineup (X6S)

Size Code (inch/mm) : 1210/3225

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 2.80                | 16                  | X6S | 47uF        | ±10%                  | CL32X476KOVZNW# |



# High Bending Strength Capacitors

## Product Lineup (X7S)

Size Code (inch/mm) : 0805/2012

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 1.35                | 100                 | X7S | 220nF       | ±10%                  | CL21Y224KCFW6#  |
| 2   | 1.45                | 100                 | X7S | 1uF         | ±10%                  | CL21Y105KCYZ4N# |
| 3   | 1.50                | 16                  | X7S | 10uF        | ±20%                  | CL21Y106MOYZ4U# |

Size Code (inch/mm) : 1206/3216

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 1.80                | 100                 | X7S | 2.2uF       | ±10%                  | CL31Y225KCHZ4N# |
| 2   | 1.90                | 16                  | X7S | 22uF        | ±10%                  | CL31Y226KOK64N# |
| 3   | 1.90                | 25                  | X7S | 22uF        | ±20%                  | CL31Y226MAK64N# |
| 4   | 1.90                | 100                 | X7S | 4.7uF       | ±10%                  | CL31Y475KCK64N# |

Size Code (inch/mm) : 1210/3225

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 2.20                | 100                 | X7S | 4.7uF       | ±10%                  | CL32Y475KCIZ4N# |
| 2   | 2.70                | 100                 | X7S | 4.7uF       | ±10%                  | CL32Y475KCJZ4N# |
| 3   | 2.80                | 100                 | X7S | 10uF        | ±10%                  | CL32Y106KCV64N# |
| 4   | 2.80                | 100                 | X7S | 10uF        | ±10%                  | CL32Y106KCVZ4N# |



# High Bending Strength Capacitors

## Product Lineup (X7R)

Size Code (inch/mm) : 0402/1005

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 0.55                | 10                  | X7R | 470nF       | ±10%                  | CL05B474KP5Z4N# |
| 2   | 0.55                | 16                  | X7R | 100nF       | ±10%                  | CL05B104K05Z4N# |
| 3   | 0.55                | 16                  | X7R | 22nF        | ±10%                  | CL05B223K05Z4N# |
| 4   | 0.55                | 50                  | X7R | 1nF         | ±10%                  | CL05B102KB5Z4N# |
| 5   | 0.55                | 50                  | X7R | 2.2nF       | ±10%                  | CL05B222KB5Z4N# |

Size Code (inch/mm) : 0603/1608

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 0.70                | 100                 | X7R | 10nF        | ±10%                  | CL21B103KC6Z4N# |
| 2   | 0.90                | 25                  | X7R | 100nF       | ±10%                  | CL10B104KA8Z4N# |
| 3   | 0.90                | 25                  | X7R | 1uF         | ±10%                  | CL10B105KA8Z4N# |
| 4   | 0.90                | 25                  | X7R | 220nF       | ±10%                  | CL10B224KA8Z4N# |
| 5   | 0.90                | 50                  | X7R | 100nF       | ±10%                  | CL10B104KB8ZW6# |
| 6   | 0.90                | 50                  | X7R | 100nF       | ±10%                  | CL10B104KB8Z4N# |
| 7   | 0.90                | 50                  | X7R | 1nF         | ±10%                  | CL10B102KB8Z4N# |
| 8   | 0.90                | 50                  | X7R | 220nF       | ±10%                  | CL10B224KB8Z4J# |
| 9   | 0.95                | 50                  | X7R | 1uF         | ±10%                  | CL10B105KB8Z4Q# |

Size Code (inch/mm) : 0805/2012

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 0.95                | 250                 | X7R | 1nF         | ±10%                  | CL21B102KECSW6# |
| 2   | 1.35                | 25                  | X7R | 1uF         | ±10%                  | CL21B105KAFZ4N# |
| 3   | 1.35                | 25                  | X7R | 2.2uF       | ±10%                  | CL21B225KAFZ4J# |
| 4   | 1.35                | 100                 | X7R | 100nF       | ±10%                  | CL21B104KCFZ4N# |



# High Bending Strength Capacitors

Size Code (inch/mm) : 1206/3216

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 1.40                | 630                 | X7R | 10nF        | ±10%                  | CL31B103KHFSW6# |
| 2   | 1.40                | 630                 | X7R | 1nF         | ±10%                  | CL31B102KHFSW6# |
| 3   | 1.45                | 250                 | X7R | 22nF        | ±10%                  | CL21B223KEY64N# |
| 4   | 1.80                | 10                  | X7R | 10uF        | ±10%                  | CL31B106KPHZ4N# |
| 5   | 1.80                | 25                  | X7R | 10uF        | ±10%                  | CL31B106KAHZW6# |
| 6   | 1.80                | 25                  | X7R | 4.7uF       | ±10%                  | CL31B475KAHZW6# |
| 7   | 1.80                | 35                  | X7R | 10uF        | ±10%                  | CL31B106KLHSNN# |
| 8   | 1.80                | 100                 | X7R | 1uF         | ±10%                  | CL31B105KCHZ4N# |
| 9   | 1.80                | 100                 | X7R | 2.2uF       | ±10%                  | CL31B225KCHZ4N# |
| 10  | 1.80                | 250                 | X7R | 100nF       | ±10%                  | CL31B104KEHSW6# |
| 11  | 1.80                | 630                 | X7R | 22nF        | ±10%                  | CL31B223KHH64N# |
| 12  | 1.80                | 1000                | X7R | 10nF        | ±10%                  | CL31B103KIHZ4N# |
| 13  | 1.90                | 6.3                 | X7R | 22uF        | ±10%                  | CL31B226KQKZ4N# |
| 14  | 1.90                | 10                  | X7R | 22uF        | ±10%                  | CL31B226KPKZ4N# |

Size Code (inch/mm) : 1210/3225

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 2.00                | 250                 | X7R | 220nF       | ±10%                  | CL32B224KEU64N# |
| 2   | 2.70                | 50                  | X7R | 10uF        | ±10%                  | CL32B106KBJZW6# |
| 3   | 2.70                | 50                  | X7R | 4.7uF       | ±10%                  | CL32B475KBJSW6# |
| 4   | 2.70                | 100                 | X7R | 2.2uF       | ±10%                  | CL32B225KCJZW6# |
| 5   | 2.70                | 100                 | X7R | 2.2uF       | ±10%                  | CL32B225KCJZ4N# |
| 6   | 2.70                | 100                 | X7R | 4.7uF       | ±10%                  | CL32B475KCJZ4N# |
| 7   | 2.80                | 50                  | X7R | 10uF        | ±10%                  | CL32B106KBVZ4N# |

## Product Lineup (X8L)

Size Code (inch/mm) : 1210/3225

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|
| 1   | 2.70                | 100                 | X8L | 4.7uF       | ±10%                  | CL32E475KCJZ4N# |

# Low Acoustic Noise Capacitors

Low Acoustic Noise

## Features

- MLCC tremors can occur due to piezoelectric phenomena in electronic devices.
- These tremors are transmitted to the substrate, causing the substrate to tremble, causing audible noise (20Hz~20kHz).
- Low Acoustic Noise products are a solution that can effectively reduce this noise.



- \* THMC : Thick Horizontally Mounted Capacitor
- \* ANSC : Acoustic Noise Suppressed Capacitor



[Comparison of Noise Reduction Effects]



# Low Acoustic Noise Capacitors



## Application

- All Application (Smart Phone, PC, HDD/SSD Board, Tablet, Display, Etc), Power (SMPS, DC-DC Converter), Industrial Application

## Structure and Dimensions

### Low Acoustic Noise Capacitor\_THMC



| Size Code | Dimension (mm) |           |           |               |                 | EIA (inch) |
|-----------|----------------|-----------|-----------|---------------|-----------------|------------|
|           | L              | W         | T         | Thckness Code | BW              |            |
| 05        | 1.00±0.25      | 0.50±0.25 | 0.60±0.25 | 6             | 0.25±0.10       | 0402       |
|           | 1.00±0.15      | 0.50±0.15 | 0.70±0.10 | 7             |                 |            |
|           | 1.00±0.20      | 0.50±0.20 | 0.80±0.10 | 8             |                 |            |
|           | 1.00±0.20      | 0.50±0.20 | 0.90±0.10 | 9             |                 |            |
| 10        | 1.60±0.30      | 0.80±0.30 | 0.90±0.10 | 9             | 0.30±0.20       | 0603       |
|           | 1.60±0.25      | 0.80±0.25 | 0.85±0.10 | C             |                 |            |
|           | 1.60±0.20      | 0.80±0.20 | 1.10±0.10 | E             |                 |            |
|           | 1.60±0.25      | 0.80±0.25 | 1.15±0.10 | M             |                 |            |
|           | 1.60±0.10      | 0.80±0.10 | 0.95±0.10 | N             |                 |            |
| 21        | 2.00±0.20      | 1.25±0.20 | 1.10±0.10 | E             | 0.50+0.20/-0.30 | 0805       |





# Low Acoustic Noise Capacitors

Size Code (inch/mm) : 0603/1608

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     | Remarks |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|---------|
| 1   | 0.80                | 10                  | X5R | 22uF        | ±20%                  | CL10A226MP7ZZB# | T-HMC   |
| 2   | 0.95                | 6.3                 | X5R | 22uF        | ±20%                  | CL10A226MQCNUB# | T-HMC   |
| 3   | 0.95                | 10                  | X5R | 22uF        | ±20%                  | CL10A226MPCNUB# | T-HMC   |
| 4   | 1.00                | 10                  | X5R | 22uF        | ±20%                  | CL10A226MP9NZB# | T-HMC   |
| 5   | 1.00                | 10                  | X5R | 4.7uF       | ±10%                  | CL10A475KP9NHB# | T-HMC   |
| 6   | 1.05                | 6.3                 | X5R | 10uF        | ±20%                  | CL10A106MQNNHB# | T-HMC   |
| 7   | 1.05                | 10                  | X5R | 10uF        | ±20%                  | CL10A106MPNNHB# | T-HMC   |
| 8   | 1.20                | 6.3                 | X5R | 47uF        | ±20%                  | CL10A476MQENRB# | T-HMC   |
| 9   | 1.20                | 25                  | X5R | 10uF        | ±20%                  | CL10A106MAEURN# | ANSC-B  |
| 10  | 1.25                | 6.3                 | X5R | 22uF        | ±20%                  | CL10A226MQMNUB# | T-HMC   |
| 11  | 1.25                | 10                  | X5R | 22uF        | ±20%                  | CL10A226MPMNUB# | T-HMC   |

Size Code (inch/mm) : 0805/2012

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     | Remarks |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|---------|
| 1   | 1.20                | 25                  | X5R | 10uF        | ±10%                  | CL21A106KAENRB# | T-HMC   |
| 2   | 2.00                | 25                  | X5R | 10uF        | ±10%                  | CL21A106KAUUNN# | ANSC-A  |

## Product Lineup (X6S)

Size Code (inch/mm) : 0402/1005

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     | Remarks |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|---------|
| 1   | 0.85                | 2.5                 | X6S | 20uF        | ±20%                  | CL05X206MS6N6B# | T-HMC   |

Size Code (inch/mm) : 0603/1608

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     | Remarks |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|---------|
| 1   | 1.20                | 6.3                 | X6S | 22uF        | ±20%                  | CL10X226MQEURN# | ANSC-B  |

# Low ESL Capacitors Low ESL

## Features

- MLCCs with low equivalent series inductance (ESL) can be used in circuits with limited mounting area, as a small quantity of such MLCCs can sufficiently replace high-speed IC MLCCs.

Multiple MLCC Used for Energy Transfer



Multiple MLCCs Used

Low ESL MLCC



Low ESL MLCC Used



[Comparison between Impedance-Frequency Characteristics]



## Application

- All Application (Smart Phone, Wearable Devices, IC Package, PC)



# Low ESL Capacitors

## Structure and Dimensions

Low ESL Capacitor\_Reverse



| Size Code | Dimension (mm) |           |                 |               |           | EIA (inch) |
|-----------|----------------|-----------|-----------------|---------------|-----------|------------|
|           | L              | W         | T               | Thckness Code | BW        |            |
| L5        | 0.52±0.05      | 1.00±0.05 | 0.20±0.02       | 2             | 0.18±0.06 | 0204       |
|           | 0.52±0.05      | 1.00±0.05 | 0.30±0.05       | 3             | 0.18±0.06 |            |
| 01        | 0.80±0.15      | 1.60±0.20 | 0.50±0.05/-0.10 | 5             | 0.25±0.15 | 0306       |

Low ESL Capacitor\_3T



| Size Code | Dimension (mm) |           |           |               |           |           |           | EIA (inch) |
|-----------|----------------|-----------|-----------|---------------|-----------|-----------|-----------|------------|
|           | L              | W         | T         | Thckness Code | BW        |           |           |            |
|           |                |           |           |               | A         | B         | C         |            |
| 05        | 1.05±0.05      | 0.65±0.05 | 0.45±0.05 | 5             | 0.17±0.10 | 0.35±0.10 | 0.15±0.10 | 0402       |
|           | 1.10±0.15      | 0.60±0.05 | 0.60±0.05 | 6             | 0.20±0.10 | 0.35±0.10 | 0.15±0.10 |            |
|           | 1.00±0.15      | 0.50±0.15 | 0.30±0.09 | B             | 0.20±0.10 | 0.35±0.10 | 0.15±0.10 |            |
| 19        | 1.20±0.05      | 0.90±0.05 | 0.75±0.05 | 7             | 0.15±0.10 | 0.50±0.10 | 0.20±0.10 | 0503       |
|           | 1.20±0.05      | 0.90±0.05 | 0.60±0.05 | A             | 0.15±0.10 | 0.50±0.10 | 0.20±0.10 |            |

Low ESL Capacitor\_8T



| Size Code | Dimension (mm) |           |               |               |           |           | EIA (inch) |      |
|-----------|----------------|-----------|---------------|---------------|-----------|-----------|------------|------|
|           | L              | W         | T             | Thckness Code | BW        | SW        |            | P    |
| 10        | 1.60±0.10      | 0.80±0.10 | 0.5±0.05/-0.1 | 5             | 0.25±0.10 | 0.15±0.10 | 0.40±0.10  | 0603 |





# Low ESL Capacitors

## Product Lineup (X5R\_3T)

Size Code (inch/mm) : 0402/1005

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     | Remarks     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|-------------|
| 1   | 0.39                | 4                   | X5R | 6.7uF       | ±20%                  | CL05A675MRBNWR# | 3T(Low ESL) |
| 2   | 0.50                | 4                   | X5R | 4.3uF       | ±20%                  | CL05A435MR5NWN# | 3T(Low ESL) |
| 3   | 0.65                | 4                   | X5R | 11uF        | ±20%                  | CL05A116MR6DWR# | 3T(Low ESL) |
| 4   | 0.65                | 4                   | X5R | 15uF        | ±20%                  | CL05A156MR6NWR# | 3T(Low ESL) |

Size Code (inch/mm) : 0503/1209

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     | Remarks     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|-------------|
| 1   | 0.55                | 4                   | X5R | 22uF        | ±20%                  | CL19A226MR3NWX# | 3T(Low ESL) |
| 2   | 0.65                | 4                   | X5R | 15uF        | ±20%                  | CL19A156MRANWN# | 3T(Low ESL) |
| 3   | 0.65                | 4                   | X5R | 22uF        | ±20%                  | CL19A226MR5NWX# | 3T(Low ESL) |
| 4   | 0.65                | 4                   | X5R | 22uF        | ±20%                  | CL19A226MRANWN# | 3T(Low ESL) |
| 5   | 0.80                | 4                   | X5R | 22uF        | ±20%                  | CL19A226MR7IWX# | 3T(Low ESL) |
| 6   | 0.80                | 4                   | X5R | 22uF        | ±20%                  | CL19A226MR7IWN# | 3T(Low ESL) |

## Product Lineup (X6S\_3T)

Size Code (inch/mm) : 0402/1005

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     | Remarks     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|-------------|
| 1   | 0.50                | 2.5                 | X6S | 4.3uF       | ±20%                  | CL05X435MS5NWX# | 3T(Low ESL) |
| 2   | 0.50                | 2.5                 | X6S | 4.3uF       | ±20%                  | CL05X435MS5NWN# | 3T(Low ESL) |

## Product Lineup (X6T\_3T)

Size Code (inch/mm) : 0402/1005

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     | Remarks     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|-------------|
| 1   | 0.39                | 2.5                 | X6T | 6.7uF       | ±20%                  | CL05W675MSBNWR# | 3T(Low ESL) |



# Low ESL Capacitors

## Product Lineup (X7S\_8T)

Size Code (inch/mm) : 0603/1608

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     | Remarks     |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|-------------|
| 1   | 0.55                | 4V                  | X7S | 2.2uF       | ±20%                  | CL10Y225MR5NJN# | 8T(Low ESL) |

## Product Lineup (X5R\_Reverse)

Size Code (inch/mm) : 0204/0510

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     | Remarks           |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|-------------------|
| 1   | 0.10                | 2.5                 | X5R | 550nF       | ±20%                  | CLL5A554MSJHLC# | Reverse (Low ESL) |
| 2   | 0.10                | 4                   | X5R | 220nF       | ±20%                  | CLL5A224MRJHLC# | Reverse (Low ESL) |

## Product Lineup (X6S\_Reverse)

Size Code (inch/mm) : 0204/0510

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     | Remarks           |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|-------------------|
| 1   | 0.10                | 2.5                 | X6S | 470nF       | ±20%                  | CLL5X474MSJHLC# | Reverse (Low ESL) |
| 2   | 0.35                | 4                   | X6S | 1uF         | ±20%                  | CLL5X105MR3NLN# | Reverse (Low ESL) |

## Product Lineup (X7S\_Reverse)

Size Code (inch/mm) : 0306/0816

| No. | Thickness Max. (mm) | Rated Voltage (Vdc) | TCC | Capacitance | Capacitance Tolerance | Part Number     | Remarks           |
|-----|---------------------|---------------------|-----|-------------|-----------------------|-----------------|-------------------|
| 1   | 0.55                | 4                   | X7S | 1uF         | ±20%                  | CL01Y105MR5NLN# | Reverse (Low ESL) |

# Application Guide

## Smartphone / Tablet

As smartphone has high-performance hardware functions to provide enhanced user experience, various voltage regulators are required for each IC. Power management system includes several PMICs as well as charging system with external passive components.



| Noise Filtering, Stable Power Delivery                                                               | High Bending Strength                                       | Middle & High Freq. Noise                              | Audible Noise                                                  | High Freq. Noise, Limited Space                                 |
|------------------------------------------------------------------------------------------------------|-------------------------------------------------------------|--------------------------------------------------------|----------------------------------------------------------------|-----------------------------------------------------------------|
| <b>Normal</b>                                                                                        | <b>Soft Termination</b>                                     | <b>Low ESL</b>                                         | <b>Low Acoustic</b>                                            | <b>LSC</b>                                                      |
| <ul style="list-style-type: none"> <li>1 High C</li> <li>2 3 10V ↑</li> <li>4 Low Profile</li> </ul> | <ul style="list-style-type: none"> <li>2 4 2mm ↑</li> </ul> | <ul style="list-style-type: none"> <li>1 3T</li> </ul> | <ul style="list-style-type: none"> <li>2 THMC, ANSC</li> </ul> | <ul style="list-style-type: none"> <li>5 Low Profile</li> </ul> |

# Application Guide

## Laptop

Laptop consist of various form factors and functions by models in consideration of the needs of various customers. In order to implement those functions, many of such function blocks as Memory, Storage, Wi-Fi, are organically connected around the CPU module, and require various power sources. In accordance with the recent trend of high performance, miniaturization and sliming of the sets, passive components are being developed with a focus on high temperature and high capacitance.



| Noise Filtering, Stable Power Delivery | High Bending Strength | Middle & High Freq. Noise | Audible Noise |
|----------------------------------------|-----------------------|---------------------------|---------------|
| Normal                                 | Soft Termination      | Low ESL                   | Low Acoustic  |
| ① High C<br>③ ④ 10V ↑                  | ④ 2mm ↑               | ② 3T, 8T                  | ⑤ THMC, ANSC  |

# Application Guide

## Server

In recent years, many technologies with upgraded performance, such as high-performance CPU, PCIe 5.0, and DDR5 are being applied to servers. Since such a high-performance server consumes a large amount of current during operation and generates a lot of heat to deteriorate the operation environment, high reliability of the components is required. CPU power line consuming a large amount of currents requires many small-sized and high-capacitance MLCCs to lower the impedance, and the components for high-temperature in the high-temperature environment around CPU.



| Noise Filtering, Stable Power Delivery                                                                           | High Bending Strength                                     | Middle & High Freq. Noise                                  |
|------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------|------------------------------------------------------------|
| <b>Normal</b>                                                                                                    | <b>Soft Termination</b>                                   | <b>Low ESL</b>                                             |
| <ul style="list-style-type: none"> <li>1 High C</li> <li>3 16V ↑</li> <li>4 High Temp.</li> </ul> (High Level I) | <ul style="list-style-type: none"> <li>3 3mm ↑</li> </ul> | <ul style="list-style-type: none"> <li>2 3T, 8T</li> </ul> |

# Application Guide

## Network (Base Station)

RUs are required to be small, light-weight and highly reliable because most of them are exposed to the sunlight being installed on towers or building roofs. With the introduction of 5G, high-integrated and high-performance FPGA/DSP are being used for network equipment to cope with the demand of faster data processing speed and to process the data traffic surge. Accordingly, the demand for high-capacitance MLCCs for stable power supply to high-performance ICs is increasing.



Noise Filtering,  
Stable Power  
Delivery

High Bending  
Strength

Normal

Soft Termination

- ① ③ High Volt.
- ① ② ③ High C
- ③ High Temp.

(High Level I)

- ④ 3mm ↑

# Reliability Test Conditions

| No.                                                                                                                                            | Item                                 | Performance                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Test condition                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |             |           |                       |           |                                      |           |                       |            |                       |               |         |                   |                                      |               |                       |             |                      |               |           |                 |                                                        |            |                                      |                                                        |                                            |                                                                                                                                                |          |  |
|------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-----------|-----------------------|-----------|--------------------------------------|-----------|-----------------------|------------|-----------------------|---------------|---------|-------------------|--------------------------------------|---------------|-----------------------|-------------|----------------------|---------------|-----------|-----------------|--------------------------------------------------------|------------|--------------------------------------|--------------------------------------------------------|--------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|----------|--|
| 1                                                                                                                                              | Appearance                           | No abnormal exterior appearance                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Visual Inspection through Microscope (x10)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |             |           |                       |           |                                      |           |                       |            |                       |               |         |                   |                                      |               |                       |             |                      |               |           |                 |                                                        |            |                                      |                                                        |                                            |                                                                                                                                                |          |  |
| 2                                                                                                                                              | Insulation resistance                | 10,000Ω min. or 500Ω·μF min. (or 100Ω·μF) product whichever is smaller<br>(Rated voltage ≤16V : 10,000Ω min. or 100Ω·μF min. product whichever is smaller)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Apply the rated voltage for 60 ~ 120sec.<br>Rated voltage > 500V : Insulation Resistance shall be measured with 500±50Vdc                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |             |           |                       |           |                                      |           |                       |            |                       |               |         |                   |                                      |               |                       |             |                      |               |           |                 |                                                        |            |                                      |                                                        |                                            |                                                                                                                                                |          |  |
| 3                                                                                                                                              | Withstanding voltage                 | No dielectric breakdown or mechanical breakdown                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Apply the specified voltage* for 1~5 sec.<br>Charge / Discharge current limit: 50mA max.<br>* CLASS I (Rated Voltage < 100V) : 300% of the rated Voltage<br>CLASS II (Rated Voltage < 100V) : 250% of the rated Voltage<br><br>In the case of Vr ≥ 100V products, following condition should be applied.<br>100V ≤ Rated Voltage < 500V : 250% of the rated Voltage<br>500V ≤ Rated Voltage < 1000V : 150% of the rated Voltage<br>Rated Voltage ≥ 1000V : 120% of the rated Voltage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |             |           |                       |           |                                      |           |                       |            |                       |               |         |                   |                                      |               |                       |             |                      |               |           |                 |                                                        |            |                                      |                                                        |                                            |                                                                                                                                                |          |  |
| 4                                                                                                                                              | Capacitance                          | Class I                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Within the specified tolerance                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |             |           |                       |           |                                      |           |                       |            |                       |               |         |                   |                                      |               |                       |             |                      |               |           |                 |                                                        |            |                                      |                                                        |                                            |                                                                                                                                                |          |  |
|                                                                                                                                                |                                      | Class II                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Within the specified tolerance                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |             |           |                       |           |                                      |           |                       |            |                       |               |         |                   |                                      |               |                       |             |                      |               |           |                 |                                                        |            |                                      |                                                        |                                            |                                                                                                                                                |          |  |
| 5                                                                                                                                              | Q                                    | Capacitance ≥ 30pF : Q ≥ 1,000<br>< 30pF : Q ≥ 400+20×C<br>(C : Capacitance)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <p><b>Class I</b></p> <table border="1"> <thead> <tr> <th>Capacitance</th> <th>Frequency</th> <th>Voltage</th> </tr> </thead> <tbody> <tr> <td>≤ 1,000pF</td> <td>1kHz ± 10%</td> <td rowspan="2">0.5~5Vrms</td> </tr> <tr> <td>&gt; 1,000pF</td> <td>1kHz ± 10%</td> </tr> </tbody> </table> <p><b>Class II</b></p> <table border="1"> <thead> <tr> <th>Capacitance</th> <th>Frequency</th> <th>Voltage</th> </tr> </thead> <tbody> <tr> <td>≤ 10μF</td> <td>1kHz ± 10%</td> <td>1.0 ± 0.2Vrms</td> </tr> <tr> <td>&gt; 10μF</td> <td>120Hz ± 20%</td> <td>0.5 ± 0.1Vrms</td> </tr> </tbody> </table> <p><b>Exception</b></p> <table border="1"> <thead> <tr> <th>Capacitance</th> <th>Frequency</th> <th>Voltage</th> </tr> </thead> <tbody> <tr> <td>0201 (0603) size<br/>0.22μF ≤ C ≤ 10μF<br/>Less than 10V</td> <td rowspan="3">1kHz ± 10%</td> <td rowspan="3">0.5 ± 0.1Vrms</td> </tr> <tr> <td>0402 (1005) size,<br/>2.2μF ≤ C ≤ 10μF<br/>Less than 25V</td> </tr> <tr> <td>0603 (1608) size,<br/>10μF<br/>Less than 25V</td> </tr> <tr> <td>05J105KP5N3*<br/>05J105KQ5N3*<br/>03A105M03NR*<br/>10B225KP8*<br/>21A475KQQ*<br/>21A106KQQ*<br/>21A625KPQ*<br/>21X106MRC*<br/>21X106KQQ*<br/>21B106KQQ*</td> <td></td> <td></td> </tr> </tbody> </table> | Capacitance | Frequency | Voltage               | ≤ 1,000pF | 1kHz ± 10%                           | 0.5~5Vrms | > 1,000pF             | 1kHz ± 10% | Capacitance           | Frequency     | Voltage | ≤ 10μF            | 1kHz ± 10%                           | 1.0 ± 0.2Vrms | > 10μF                | 120Hz ± 20% | 0.5 ± 0.1Vrms        | Capacitance   | Frequency | Voltage         | 0201 (0603) size<br>0.22μF ≤ C ≤ 10μF<br>Less than 10V | 1kHz ± 10% | 0.5 ± 0.1Vrms                        | 0402 (1005) size,<br>2.2μF ≤ C ≤ 10μF<br>Less than 25V | 0603 (1608) size,<br>10μF<br>Less than 25V | 05J105KP5N3*<br>05J105KQ5N3*<br>03A105M03NR*<br>10B225KP8*<br>21A475KQQ*<br>21A106KQQ*<br>21A625KPQ*<br>21X106MRC*<br>21X106KQQ*<br>21B106KQQ* |          |  |
|                                                                                                                                                | Capacitance                          | Frequency                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Voltage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |             |           |                       |           |                                      |           |                       |            |                       |               |         |                   |                                      |               |                       |             |                      |               |           |                 |                                                        |            |                                      |                                                        |                                            |                                                                                                                                                |          |  |
| ≤ 1,000pF                                                                                                                                      | 1kHz ± 10%                           | 0.5~5Vrms                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |             |           |                       |           |                                      |           |                       |            |                       |               |         |                   |                                      |               |                       |             |                      |               |           |                 |                                                        |            |                                      |                                                        |                                            |                                                                                                                                                |          |  |
| > 1,000pF                                                                                                                                      | 1kHz ± 10%                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |             |           |                       |           |                                      |           |                       |            |                       |               |         |                   |                                      |               |                       |             |                      |               |           |                 |                                                        |            |                                      |                                                        |                                            |                                                                                                                                                |          |  |
| Capacitance                                                                                                                                    | Frequency                            | Voltage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |             |           |                       |           |                                      |           |                       |            |                       |               |         |                   |                                      |               |                       |             |                      |               |           |                 |                                                        |            |                                      |                                                        |                                            |                                                                                                                                                |          |  |
| ≤ 10μF                                                                                                                                         | 1kHz ± 10%                           | 1.0 ± 0.2Vrms                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |             |           |                       |           |                                      |           |                       |            |                       |               |         |                   |                                      |               |                       |             |                      |               |           |                 |                                                        |            |                                      |                                                        |                                            |                                                                                                                                                |          |  |
| > 10μF                                                                                                                                         | 120Hz ± 20%                          | 0.5 ± 0.1Vrms                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |             |           |                       |           |                                      |           |                       |            |                       |               |         |                   |                                      |               |                       |             |                      |               |           |                 |                                                        |            |                                      |                                                        |                                            |                                                                                                                                                |          |  |
| Capacitance                                                                                                                                    | Frequency                            | Voltage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |             |           |                       |           |                                      |           |                       |            |                       |               |         |                   |                                      |               |                       |             |                      |               |           |                 |                                                        |            |                                      |                                                        |                                            |                                                                                                                                                |          |  |
| 0201 (0603) size<br>0.22μF ≤ C ≤ 10μF<br>Less than 10V                                                                                         | 1kHz ± 10%                           | 0.5 ± 0.1Vrms                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |             |           |                       |           |                                      |           |                       |            |                       |               |         |                   |                                      |               |                       |             |                      |               |           |                 |                                                        |            |                                      |                                                        |                                            |                                                                                                                                                |          |  |
| 0402 (1005) size,<br>2.2μF ≤ C ≤ 10μF<br>Less than 25V                                                                                         |                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |             |           |                       |           |                                      |           |                       |            |                       |               |         |                   |                                      |               |                       |             |                      |               |           |                 |                                                        |            |                                      |                                                        |                                            |                                                                                                                                                |          |  |
| 0603 (1608) size,<br>10μF<br>Less than 25V                                                                                                     |                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |             |           |                       |           |                                      |           |                       |            |                       |               |         |                   |                                      |               |                       |             |                      |               |           |                 |                                                        |            |                                      |                                                        |                                            |                                                                                                                                                |          |  |
| 05J105KP5N3*<br>05J105KQ5N3*<br>03A105M03NR*<br>10B225KP8*<br>21A475KQQ*<br>21A106KQQ*<br>21A625KPQ*<br>21X106MRC*<br>21X106KQQ*<br>21B106KQQ* |                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |             |           |                       |           |                                      |           |                       |            |                       |               |         |                   |                                      |               |                       |             |                      |               |           |                 |                                                        |            |                                      |                                                        |                                            |                                                                                                                                                |          |  |
| Tanδ                                                                                                                                           | Class II                             | <p><b>1. Characteristic : A (X5R)</b></p> <table border="1"> <thead> <tr> <th>Rated Voltage</th> <th>Spec</th> </tr> </thead> <tbody> <tr> <td>50V / 35V</td> <td>0.025 max / 0.05 max*</td> </tr> <tr> <td>25V</td> <td>0.025 max / 0.05 max*<br/>/ 0.10 max*</td> </tr> <tr> <td>16V</td> <td>0.035 max / 0.10 max*</td> </tr> <tr> <td>≤ 10</td> <td>0.035 max / 0.10 max*</td> </tr> </tbody> </table> <p><b>2. Characteristic : B (X7R), X (X6S), Y (X7S)</b></p> <table border="1"> <thead> <tr> <th>Rated Voltage</th> <th>Spec</th> </tr> </thead> <tbody> <tr> <td>50V ≥ / 35V / 25V</td> <td>0.025 max / 0.05 max*<br/>/ 0.10 max*</td> </tr> <tr> <td>16V</td> <td>0.035 max / 0.10 max*</td> </tr> <tr> <td>≤ 10V</td> <td>0.05 max / 0.10 max*</td> </tr> </tbody> </table> <p><b>3. Characteristic : F (Y5V)</b></p> <table border="1"> <thead> <tr> <th>Rated Voltage</th> <th>Spec</th> </tr> </thead> <tbody> <tr> <td>50V / 35V / 25V</td> <td>0.05 max / 0.07 max*<br/>/ 0.09 max*</td> </tr> <tr> <td>16V</td> <td>0.07 max / 0.09 max*<br/>/ 0.125 max*</td> </tr> <tr> <td>10V</td> <td>0.125 max / 0.16 max*</td> </tr> <tr> <td>≤ 6.3V</td> <td>0.16 max</td> </tr> </tbody> </table> <p>* The conditions of measurement may be altered upon request.</p> | Rated Voltage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Spec        | 50V / 35V | 0.025 max / 0.05 max* | 25V       | 0.025 max / 0.05 max*<br>/ 0.10 max* | 16V       | 0.035 max / 0.10 max* | ≤ 10       | 0.035 max / 0.10 max* | Rated Voltage | Spec    | 50V ≥ / 35V / 25V | 0.025 max / 0.05 max*<br>/ 0.10 max* | 16V           | 0.035 max / 0.10 max* | ≤ 10V       | 0.05 max / 0.10 max* | Rated Voltage | Spec      | 50V / 35V / 25V | 0.05 max / 0.07 max*<br>/ 0.09 max*                    | 16V        | 0.07 max / 0.09 max*<br>/ 0.125 max* | 10V                                                    | 0.125 max / 0.16 max*                      | ≤ 6.3V                                                                                                                                         | 0.16 max |  |
| Rated Voltage                                                                                                                                  | Spec                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |             |           |                       |           |                                      |           |                       |            |                       |               |         |                   |                                      |               |                       |             |                      |               |           |                 |                                                        |            |                                      |                                                        |                                            |                                                                                                                                                |          |  |
| 50V / 35V                                                                                                                                      | 0.025 max / 0.05 max*                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |             |           |                       |           |                                      |           |                       |            |                       |               |         |                   |                                      |               |                       |             |                      |               |           |                 |                                                        |            |                                      |                                                        |                                            |                                                                                                                                                |          |  |
| 25V                                                                                                                                            | 0.025 max / 0.05 max*<br>/ 0.10 max* |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |             |           |                       |           |                                      |           |                       |            |                       |               |         |                   |                                      |               |                       |             |                      |               |           |                 |                                                        |            |                                      |                                                        |                                            |                                                                                                                                                |          |  |
| 16V                                                                                                                                            | 0.035 max / 0.10 max*                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |             |           |                       |           |                                      |           |                       |            |                       |               |         |                   |                                      |               |                       |             |                      |               |           |                 |                                                        |            |                                      |                                                        |                                            |                                                                                                                                                |          |  |
| ≤ 10                                                                                                                                           | 0.035 max / 0.10 max*                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |             |           |                       |           |                                      |           |                       |            |                       |               |         |                   |                                      |               |                       |             |                      |               |           |                 |                                                        |            |                                      |                                                        |                                            |                                                                                                                                                |          |  |
| Rated Voltage                                                                                                                                  | Spec                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |             |           |                       |           |                                      |           |                       |            |                       |               |         |                   |                                      |               |                       |             |                      |               |           |                 |                                                        |            |                                      |                                                        |                                            |                                                                                                                                                |          |  |
| 50V ≥ / 35V / 25V                                                                                                                              | 0.025 max / 0.05 max*<br>/ 0.10 max* |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |             |           |                       |           |                                      |           |                       |            |                       |               |         |                   |                                      |               |                       |             |                      |               |           |                 |                                                        |            |                                      |                                                        |                                            |                                                                                                                                                |          |  |
| 16V                                                                                                                                            | 0.035 max / 0.10 max*                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |             |           |                       |           |                                      |           |                       |            |                       |               |         |                   |                                      |               |                       |             |                      |               |           |                 |                                                        |            |                                      |                                                        |                                            |                                                                                                                                                |          |  |
| ≤ 10V                                                                                                                                          | 0.05 max / 0.10 max*                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |             |           |                       |           |                                      |           |                       |            |                       |               |         |                   |                                      |               |                       |             |                      |               |           |                 |                                                        |            |                                      |                                                        |                                            |                                                                                                                                                |          |  |
| Rated Voltage                                                                                                                                  | Spec                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |             |           |                       |           |                                      |           |                       |            |                       |               |         |                   |                                      |               |                       |             |                      |               |           |                 |                                                        |            |                                      |                                                        |                                            |                                                                                                                                                |          |  |
| 50V / 35V / 25V                                                                                                                                | 0.05 max / 0.07 max*<br>/ 0.09 max*  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |             |           |                       |           |                                      |           |                       |            |                       |               |         |                   |                                      |               |                       |             |                      |               |           |                 |                                                        |            |                                      |                                                        |                                            |                                                                                                                                                |          |  |
| 16V                                                                                                                                            | 0.07 max / 0.09 max*<br>/ 0.125 max* |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |             |           |                       |           |                                      |           |                       |            |                       |               |         |                   |                                      |               |                       |             |                      |               |           |                 |                                                        |            |                                      |                                                        |                                            |                                                                                                                                                |          |  |
| 10V                                                                                                                                            | 0.125 max / 0.16 max*                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |             |           |                       |           |                                      |           |                       |            |                       |               |         |                   |                                      |               |                       |             |                      |               |           |                 |                                                        |            |                                      |                                                        |                                            |                                                                                                                                                |          |  |
| ≤ 6.3V                                                                                                                                         | 0.16 max                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |             |           |                       |           |                                      |           |                       |            |                       |               |         |                   |                                      |               |                       |             |                      |               |           |                 |                                                        |            |                                      |                                                        |                                            |                                                                                                                                                |          |  |

You can check the specification at the web site or contact sales people for each product with mark\*

# Reliability Test Conditions

| No.             | Item                                                                                                                                                                                                                                                                                                                                               | Performance                                                                                                                                                                                                                                                                                                                                           | Test condition                                                                                                                                                                                                                                                                                               |                           |                    |                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |        |                                          |          |                                                |             |                           |   |        |   |                         |   |        |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|--------------------|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|------------------------------------------|----------|------------------------------------------------|-------------|---------------------------|---|--------|---|-------------------------|---|--------|
| 6               | Class I                                                                                                                                                                                                                                                                                                                                            | <table border="1"> <thead> <tr> <th>Characteristic</th> <th>Temp. coefficient(PPM/°C)</th> </tr> </thead> <tbody> <tr> <td>c</td> <td>0 ±30</td> </tr> </tbody> </table>                                                                                                                                                                              | Characteristic                                                                                                                                                                                                                                                                                               | Temp. coefficient(PPM/°C) | c                  | 0 ±30              | apacitance shall be measured by the steps shown in the following table. <table border="1"> <thead> <tr> <th>Step</th> <th>Temperature(°C)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>25 ± 2</td> </tr> <tr> <td>2</td> <td>Min. operating temp ± 2</td> </tr> <tr> <td>3</td> <td>25 ± 2</td> </tr> <tr> <td>4</td> <td>Max. operating temp ± 2</td> </tr> <tr> <td>5</td> <td>25 ± 2</td> </tr> </tbody> </table> <p><b>(1) Class I</b><br/>Temperature Coefficient shall be calculated from the formula as below</p> $\text{Temp. Coefficient} = \frac{C2-C1}{C1 \times \Delta T} \times 10^6 [\text{ppm}/^\circ\text{C}]$ <p>C1 : Capacitance at 3<br/>C2 : Capacitance at 125°C<br/>ΔT : 125°C-25°C=100°C</p> <p><b>(1) Class II</b><br/>Capacitance change shall be calculated from the formula as below</p> $\Delta C = \frac{C2-C1}{C1} \times 100(\%)$ <p>C1 : Capacitance at step 3<br/>C2 : Capacitance at step 2 &amp; step 4</p> | Step   | Temperature(°C)                          | 1        | 25 ± 2                                         | 2           | Min. operating temp ± 2   | 3 | 25 ± 2 | 4 | Max. operating temp ± 2 | 5 | 25 ± 2 |
|                 | Characteristic                                                                                                                                                                                                                                                                                                                                     | Temp. coefficient(PPM/°C)                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                              |                           |                    |                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |        |                                          |          |                                                |             |                           |   |        |   |                         |   |        |
| c               | 0 ±30                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                              |                           |                    |                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |        |                                          |          |                                                |             |                           |   |        |   |                         |   |        |
| Step            | Temperature(°C)                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                              |                           |                    |                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |        |                                          |          |                                                |             |                           |   |        |   |                         |   |        |
| 1               | 25 ± 2                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                              |                           |                    |                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |        |                                          |          |                                                |             |                           |   |        |   |                         |   |        |
| 2               | Min. operating temp ± 2                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                              |                           |                    |                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |        |                                          |          |                                                |             |                           |   |        |   |                         |   |        |
| 3               | 25 ± 2                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                              |                           |                    |                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |        |                                          |          |                                                |             |                           |   |        |   |                         |   |        |
| 4               | Max. operating temp ± 2                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                              |                           |                    |                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |        |                                          |          |                                                |             |                           |   |        |   |                         |   |        |
| 5               | 25 ± 2                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                              |                           |                    |                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |        |                                          |          |                                                |             |                           |   |        |   |                         |   |        |
| Class II        | <table border="1"> <thead> <tr> <th>Characteristic</th> <th>Capacitance change(%) without no bias</th> </tr> </thead> <tbody> <tr> <td>A(X5R) / B(X7R)</td> <td>±15%</td> </tr> <tr> <td>X(X6S), Y(X7S)</td> <td>±22%</td> </tr> <tr> <td>Z(X7T)</td> <td>+22% ~ -33%</td> </tr> <tr> <td>F(Y5V)</td> <td>+22% ~ -82%</td> </tr> </tbody> </table> | Characteristic                                                                                                                                                                                                                                                                                                                                        | Capacitance change(%) without no bias                                                                                                                                                                                                                                                                        | A(X5R) / B(X7R)           | ±15%               | X(X6S), Y(X7S)     | ±22%                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Z(X7T) | +22% ~ -33%                              | F(Y5V)   | +22% ~ -82%                                    |             |                           |   |        |   |                         |   |        |
| Characteristic  | Capacitance change(%) without no bias                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                              |                           |                    |                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |        |                                          |          |                                                |             |                           |   |        |   |                         |   |        |
| A(X5R) / B(X7R) | ±15%                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                              |                           |                    |                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |        |                                          |          |                                                |             |                           |   |        |   |                         |   |        |
| X(X6S), Y(X7S)  | ±22%                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                              |                           |                    |                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |        |                                          |          |                                                |             |                           |   |        |   |                         |   |        |
| Z(X7T)          | +22% ~ -33%                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                              |                           |                    |                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |        |                                          |          |                                                |             |                           |   |        |   |                         |   |        |
| F(Y5V)          | +22% ~ -82%                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                              |                           |                    |                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |        |                                          |          |                                                |             |                           |   |        |   |                         |   |        |
| 7               | Adhesive strength of termination                                                                                                                                                                                                                                                                                                                   | No indication of peeling shall occur on the terminal electrode.                                                                                                                                                                                                                                                                                       | Apply 500g.f*pressure for 10±1 sec.<br>* 0201,0402(mm) 1N, 0603(mm) 2N,1005,1608(mm)5N, 2012,3216,3225(mm)10N  <p>0201,0402(mm)1N<br/>0603(mm)2N<br/>1005,1608(mm)5N<br/>2012,3216,3225(mm)10N</p>                       |                           |                    |                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |        |                                          |          |                                                |             |                           |   |        |   |                         |   |        |
| 8               | Appearance                                                                                                                                                                                                                                                                                                                                         | No mechanical damage shall occur.                                                                                                                                                                                                                                                                                                                     | Bending Limit: 1mm<br>Test Speed: 1.0mm/sec.<br>Keep the test board at the limit point in 5 sec.<br>Then Measure Capacitance  <p>(Unit : mm)</p>                                                                         |                           |                    |                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |        |                                          |          |                                                |             |                           |   |        |   |                         |   |        |
|                 | Capacitance                                                                                                                                                                                                                                                                                                                                        | <table border="1"> <thead> <tr> <th>Class</th> <th>Capacitance change</th> <th>Capacitance change</th> </tr> </thead> <tbody> <tr> <td>Class I</td> <td></td> <td>Within ±5% or ±0.5pF whichever is larger</td> </tr> <tr> <td>Class II</td> <td>A(X5R)<br/>B(X7R)<br/>X(X6S)<br/>Y(X7S)<br/>Z(X7T)</td> <td>Within ±10%</td> </tr> </tbody> </table> |                                                                                                                                                                                                                                                                                                              | Class                     | Capacitance change | Capacitance change | Class I                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |        | Within ±5% or ±0.5pF whichever is larger | Class II | A(X5R)<br>B(X7R)<br>X(X6S)<br>Y(X7S)<br>Z(X7T) | Within ±10% |                           |   |        |   |                         |   |        |
| Class           | Capacitance change                                                                                                                                                                                                                                                                                                                                 | Capacitance change                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                              |                           |                    |                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |        |                                          |          |                                                |             |                           |   |        |   |                         |   |        |
| Class I         |                                                                                                                                                                                                                                                                                                                                                    | Within ±5% or ±0.5pF whichever is larger                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                              |                           |                    |                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |        |                                          |          |                                                |             |                           |   |        |   |                         |   |        |
| Class II        | A(X5R)<br>B(X7R)<br>X(X6S)<br>Y(X7S)<br>Z(X7T)                                                                                                                                                                                                                                                                                                     | Within ±10%                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                              |                           |                    |                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |        |                                          |          |                                                |             |                           |   |        |   |                         |   |        |
| 9               | Solderability                                                                                                                                                                                                                                                                                                                                      | More than 75% of the terminal surface is to be soldered newly, so metal part does not come out or dissolve<br>In the case of Vr≥100V products: 95%                                                                                                                 | <table border="1"> <tbody> <tr> <td>Solder</td> <td>Sn_Ag3_0.5Cu</td> </tr> <tr> <td>Solder temp.</td> <td>245±5°C</td> </tr> <tr> <td>Flux</td> <td>RMA Type</td> </tr> <tr> <td>Dip time</td> <td>3±0.3sec</td> </tr> <tr> <td>Pre-heating</td> <td>at 80~120°C for 10~30sec.</td> </tr> </tbody> </table> | Solder                    | Sn_Ag3_0.5Cu       | Solder temp.       | 245±5°C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Flux   | RMA Type                                 | Dip time | 3±0.3sec                                       | Pre-heating | at 80~120°C for 10~30sec. |   |        |   |                         |   |        |
| Solder          | Sn_Ag3_0.5Cu                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                              |                           |                    |                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |        |                                          |          |                                                |             |                           |   |        |   |                         |   |        |
| Solder temp.    | 245±5°C                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                              |                           |                    |                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |        |                                          |          |                                                |             |                           |   |        |   |                         |   |        |
| Flux            | RMA Type                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                              |                           |                    |                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |        |                                          |          |                                                |             |                           |   |        |   |                         |   |        |
| Dip time        | 3±0.3sec                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                              |                           |                    |                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |        |                                          |          |                                                |             |                           |   |        |   |                         |   |        |
| Pre-heating     | at 80~120°C for 10~30sec.                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                              |                           |                    |                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |        |                                          |          |                                                |             |                           |   |        |   |                         |   |        |

# Reliability Test Conditions

| No.                       | Item                               | Performance | Test condition                                                                                                                                                                                                                                                                                                                                                                                                |                                                |                                      |                    |         |  |                                      |          |                                                |              |        |             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |      |           |            |   |        |    |   |         |    |
|---------------------------|------------------------------------|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|--------------------------------------|--------------------|---------|--|--------------------------------------|----------|------------------------------------------------|--------------|--------|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-----------|------------|---|--------|----|---|---------|----|
| 10                        | Resistance to soldering heat       | Appearance  | No mechanical damage shall occur                                                                                                                                                                                                                                                                                                                                                                              |                                                |                                      |                    |         |  |                                      |          |                                                |              |        |             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |      |           |            |   |        |    |   |         |    |
|                           |                                    | Capacitance | <table border="1"> <thead> <tr> <th colspan="2">Capacitance change</th> <th>Capacitance change</th> </tr> </thead> <tbody> <tr> <td colspan="2">Class I</td> <td>±2.5% or ±0.25pF whichever is larger</td> </tr> <tr> <td rowspan="4">Class II</td> <td>A(X5R)<br/>B(X7R)<br/>X(X6S)<br/>Y(X7S)<br/>Z(X7T)</td> <td>Within ±7.5%</td> </tr> <tr> <td>F(Y5V)</td> <td>Within ±20%</td> </tr> </tbody> </table> | Capacitance change                             |                                      | Capacitance change | Class I |  | ±2.5% or ±0.25pF whichever is larger | Class II | A(X5R)<br>B(X7R)<br>X(X6S)<br>Y(X7S)<br>Z(X7T) | Within ±7.5% | F(Y5V) | Within ±20% | <p>Solder temperature: 270±5°C/DIP TIME:10±1 sec.<br/>Each termination shall be fully immersed and preheated as below:</p> <table border="1"> <thead> <tr> <th>Step</th> <th>Temp.(°C)</th> <th>Time(sec.)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>80~100</td> <td>60</td> </tr> <tr> <td>2</td> <td>150~180</td> <td>60</td> </tr> </tbody> </table> <p>Leave the capacitor in ambient condition for specified time* before measurement.<br/>* 24±2 Hours (Class I )<br/>24±2 Hours (ClassII)</p> | Step | Temp.(°C) | Time(sec.) | 1 | 80~100 | 60 | 2 | 150~180 | 60 |
|                           |                                    |             | Capacitance change                                                                                                                                                                                                                                                                                                                                                                                            |                                                | Capacitance change                   |                    |         |  |                                      |          |                                                |              |        |             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |      |           |            |   |        |    |   |         |    |
|                           |                                    |             | Class I                                                                                                                                                                                                                                                                                                                                                                                                       |                                                | ±2.5% or ±0.25pF whichever is larger |                    |         |  |                                      |          |                                                |              |        |             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |      |           |            |   |        |    |   |         |    |
|                           |                                    |             | Class II                                                                                                                                                                                                                                                                                                                                                                                                      | A(X5R)<br>B(X7R)<br>X(X6S)<br>Y(X7S)<br>Z(X7T) | Within ±7.5%                         |                    |         |  |                                      |          |                                                |              |        |             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |      |           |            |   |        |    |   |         |    |
|                           |                                    | F(Y5V)      |                                                                                                                                                                                                                                                                                                                                                                                                               | Within ±20%                                    |                                      |                    |         |  |                                      |          |                                                |              |        |             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |      |           |            |   |        |    |   |         |    |
|                           |                                    | Step        |                                                                                                                                                                                                                                                                                                                                                                                                               | Temp.(°C)                                      | Time(sec.)                           |                    |         |  |                                      |          |                                                |              |        |             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |      |           |            |   |        |    |   |         |    |
| 1                         | 80~100                             | 60          |                                                                                                                                                                                                                                                                                                                                                                                                               |                                                |                                      |                    |         |  |                                      |          |                                                |              |        |             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |      |           |            |   |        |    |   |         |    |
| 2                         | 150~180                            | 60          |                                                                                                                                                                                                                                                                                                                                                                                                               |                                                |                                      |                    |         |  |                                      |          |                                                |              |        |             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |      |           |            |   |        |    |   |         |    |
| Q(Class I)                | Within the specified initial value |             |                                                                                                                                                                                                                                                                                                                                                                                                               |                                                |                                      |                    |         |  |                                      |          |                                                |              |        |             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |      |           |            |   |        |    |   |         |    |
| Tanδ(Class II)            | Within the specified initial value |             |                                                                                                                                                                                                                                                                                                                                                                                                               |                                                |                                      |                    |         |  |                                      |          |                                                |              |        |             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |      |           |            |   |        |    |   |         |    |
| Insulation resistance     | Within the specified initial value |             |                                                                                                                                                                                                                                                                                                                                                                                                               |                                                |                                      |                    |         |  |                                      |          |                                                |              |        |             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |      |           |            |   |        |    |   |         |    |
| Withstand-<br>ing voltage | No breakdown of dielectric         |             |                                                                                                                                                                                                                                                                                                                                                                                                               |                                                |                                      |                    |         |  |                                      |          |                                                |              |        |             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |      |           |            |   |        |    |   |         |    |
| 11                        | Vibration test                     | Appearance  | No mechanical damage shall occur.                                                                                                                                                                                                                                                                                                                                                                             |                                                |                                      |                    |         |  |                                      |          |                                                |              |        |             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |      |           |            |   |        |    |   |         |    |
|                           |                                    | Capacitance | <table border="1"> <thead> <tr> <th colspan="2">Capacitance change</th> <th>Capacitance change</th> </tr> </thead> <tbody> <tr> <td colspan="2">Class I</td> <td>±2.5% or ±0.25pF whichever is larger</td> </tr> <tr> <td rowspan="4">Class II</td> <td>A(X5R)<br/>B(X7R)<br/>X(X6S)<br/>Y(X7S)<br/>Z(X7T)</td> <td>Within ±5%</td> </tr> <tr> <td>F(Y5V)</td> <td>Within ±20%</td> </tr> </tbody> </table>   | Capacitance change                             |                                      | Capacitance change | Class I |  | ±2.5% or ±0.25pF whichever is larger | Class II | A(X5R)<br>B(X7R)<br>X(X6S)<br>Y(X7S)<br>Z(X7T) | Within ±5%   | F(Y5V) | Within ±20% | <p>The capacitor shall be subjected to a harmonic motion having a total amplitude of 1.5mm changing frequency from 10Hz to 55Hz and back to 10Hz in about 1 min.<br/>Repeat this for 2hours each in 3mutually perpendicular directions.</p>                                                                                                                                                                                                                                                                |      |           |            |   |        |    |   |         |    |
|                           |                                    |             | Capacitance change                                                                                                                                                                                                                                                                                                                                                                                            |                                                | Capacitance change                   |                    |         |  |                                      |          |                                                |              |        |             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |      |           |            |   |        |    |   |         |    |
|                           |                                    |             | Class I                                                                                                                                                                                                                                                                                                                                                                                                       |                                                | ±2.5% or ±0.25pF whichever is larger |                    |         |  |                                      |          |                                                |              |        |             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |      |           |            |   |        |    |   |         |    |
|                           |                                    |             | Class II                                                                                                                                                                                                                                                                                                                                                                                                      | A(X5R)<br>B(X7R)<br>X(X6S)<br>Y(X7S)<br>Z(X7T) | Within ±5%                           |                    |         |  |                                      |          |                                                |              |        |             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |      |           |            |   |        |    |   |         |    |
| F(Y5V)                    | Within ±20%                        |             |                                                                                                                                                                                                                                                                                                                                                                                                               |                                                |                                      |                    |         |  |                                      |          |                                                |              |        |             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |      |           |            |   |        |    |   |         |    |
| Q(Class I)                | Within the specified initial value |             |                                                                                                                                                                                                                                                                                                                                                                                                               |                                                |                                      |                    |         |  |                                      |          |                                                |              |        |             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |      |           |            |   |        |    |   |         |    |
| Tanδ(Class II)            | Within the specified initial value |             |                                                                                                                                                                                                                                                                                                                                                                                                               |                                                |                                      |                    |         |  |                                      |          |                                                |              |        |             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |      |           |            |   |        |    |   |         |    |
| Insulation resistance     | Within the specified initial value |             |                                                                                                                                                                                                                                                                                                                                                                                                               |                                                |                                      |                    |         |  |                                      |          |                                                |              |        |             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |      |           |            |   |        |    |   |         |    |



# Reliability Test Conditions

| No.                   | Item                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Performance                                                                                                                                                                                                                                                                                                                                                                                             | Test condition                                 |                                      |                    |         |  |                                      |          |                                                |               |        |      |                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|--------------------------------------|--------------------|---------|--|--------------------------------------|----------|------------------------------------------------|---------------|--------|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 12                    | Appearance                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | No mechanical damage shall occur                                                                                                                                                                                                                                                                                                                                                                        | Applied voltage : Rated voltage                |                                      |                    |         |  |                                      |          |                                                |               |        |      |                                                                                                                                                                                                                                                                                                                                                                                                 |
|                       | Capacitance                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | <table border="1"> <thead> <tr> <th colspan="2">Capacitance change</th> <th>Capacitance change</th> </tr> </thead> <tbody> <tr> <td colspan="2">Class I</td> <td>±7.5% or ±0.75pF whichever is larger</td> </tr> <tr> <td rowspan="4">Class II</td> <td>A(X5R)<br/>B(X7R)<br/>X(X6S)<br/>Y(X7S)<br/>Z(X7T)</td> <td>Within ±12.5%</td> </tr> <tr> <td>F(Y5V)</td> <td>±30%</td> </tr> </tbody> </table> | Capacitance change                             |                                      | Capacitance change | Class I |  | ±7.5% or ±0.75pF whichever is larger | Class II | A(X5R)<br>B(X7R)<br>X(X6S)<br>Y(X7S)<br>Z(X7T) | Within ±12.5% | F(Y5V) | ±30% | Temperature : 40±2℃<br>Humidity : 90~95%RH<br>Duration time : 500+12/-0Hr.<br>Charge/Discharge current : 50mA max.<br><br>Perform the initial measurement according to Note1.<br>Perform the final measurement according to Note2.<br><br>This test is only applied to Vr≤500V products.<br>You can check the specification at the web site or contact sales people for each product with mark* |
|                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Capacitance change                                                                                                                                                                                                                                                                                                                                                                                      |                                                | Capacitance change                   |                    |         |  |                                      |          |                                                |               |        |      |                                                                                                                                                                                                                                                                                                                                                                                                 |
|                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Class I                                                                                                                                                                                                                                                                                                                                                                                                 |                                                | ±7.5% or ±0.75pF whichever is larger |                    |         |  |                                      |          |                                                |               |        |      |                                                                                                                                                                                                                                                                                                                                                                                                 |
|                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Class II                                                                                                                                                                                                                                                                                                                                                                                                | A(X5R)<br>B(X7R)<br>X(X6S)<br>Y(X7S)<br>Z(X7T) | Within ±12.5%                        |                    |         |  |                                      |          |                                                |               |        |      |                                                                                                                                                                                                                                                                                                                                                                                                 |
| F(Y5V)                | ±30%                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                         |                                                |                                      |                    |         |  |                                      |          |                                                |               |        |      |                                                                                                                                                                                                                                                                                                                                                                                                 |
| Q(Class I)            | Capacitance ≥30pF: Q≥200<br>< 30pF: Q≥100+10/3×C<br>(C: Capacitance)                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                         |                                                |                                      |                    |         |  |                                      |          |                                                |               |        |      |                                                                                                                                                                                                                                                                                                                                                                                                 |
| Moisture resistance   | <b>1. Capacitance : A (X5R)</b><br>0.05 max / 0.075 max* (35V / 50V)<br>0.05 max / 0.075 max* / 0.125 max*(16V / 25V)<br>0.075 max / 0.125 max* (≤10V)<br><br><b>2. Capacitance : B (X7R), X (X6S)</b><br>0.05 max / 0.125 max* (16V / 25V / 35V / 50V≥)<br>0.075 max / 0.125 max* (≤10V)<br><br><b>3. Capacitance : F (Y5V)</b><br>0.09 max (50V)<br>0.09 max / 0.125 max* (25V / 35V)<br>0.09 max / 0.125 max* / 0.16 max* (16V)<br>0.16 max / 0.195 max* (10V)<br>0.195 max (4V / 6.3V) |                                                                                                                                                                                                                                                                                                                                                                                                         |                                                |                                      |                    |         |  |                                      |          |                                                |               |        |      |                                                                                                                                                                                                                                                                                                                                                                                                 |
| Tanδ(Class II)        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                         |                                                |                                      |                    |         |  |                                      |          |                                                |               |        |      |                                                                                                                                                                                                                                                                                                                                                                                                 |
| Insulation resistance | 500MΩ min. or 25MΩ·μF min.<br>product whichever is smaller / 12.5MΩ·μF or over*                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                         |                                                |                                      |                    |         |  |                                      |          |                                                |               |        |      |                                                                                                                                                                                                                                                                                                                                                                                                 |



# Reliability Test Conditions

| No.                   | Item                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Performance                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Test condition                           |                    |                    |         |  |                                      |          |        |               |        |        |        |        |        |      |                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|--------------------|--------------------|---------|--|--------------------------------------|----------|--------|---------------|--------|--------|--------|--------|--------|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 13                    | Appearance                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | No mechanical damage shall occur                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Temperature : max. operating temperature |                    |                    |         |  |                                      |          |        |               |        |        |        |        |        |      |                                                                                                                                                                                                                                                                                                                                                                                                                  |
|                       | Capacitance                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | <table border="1"> <thead> <tr> <th colspan="2">Capacitance change</th> <th>Capacitance change</th> </tr> </thead> <tbody> <tr> <td colspan="2">Class I</td> <td>±3% or ±0.3pF<br/>whichever is larger</td> </tr> <tr> <td rowspan="5">Class II</td> <td>A(X5R)</td> <td rowspan="5">Within ±12.5%</td> </tr> <tr> <td>B(X7R)</td> </tr> <tr> <td>X(X6S)</td> </tr> <tr> <td>Y(X7S)</td> </tr> <tr> <td>Z(X7T)</td> </tr> <tr> <td>F(Y5V)</td> <td>±30%</td> </tr> </tbody> </table> | Capacitance change                       |                    | Capacitance change | Class I |  | ±3% or ±0.3pF<br>whichever is larger | Class II | A(X5R) | Within ±12.5% | B(X7R) | X(X6S) | Y(X7S) | Z(X7T) | F(Y5V) | ±30% | Duration Time: 1000+48/-0 Hr.<br>Charge/Discharge Current: 50mAmax.<br><br>Apply Voltage : 100% of Rated Voltage<br>It depends on each item (120%/150%/200% Rated Voltage)<br><br>Perform the initial measurement according to Note1 for classII<br>Perform the final measurement according to Note2.<br><br>You can check the specification at the web site or contact sales people for each product with mark* |
|                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Capacitance change                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                          | Capacitance change |                    |         |  |                                      |          |        |               |        |        |        |        |        |      |                                                                                                                                                                                                                                                                                                                                                                                                                  |
|                       | Class I                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | ±3% or ±0.3pF<br>whichever is larger     |                    |                    |         |  |                                      |          |        |               |        |        |        |        |        |      |                                                                                                                                                                                                                                                                                                                                                                                                                  |
|                       | Class II                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | A(X5R)                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Within ±12.5%                            |                    |                    |         |  |                                      |          |        |               |        |        |        |        |        |      |                                                                                                                                                                                                                                                                                                                                                                                                                  |
| B(X7R)                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                          |                    |                    |         |  |                                      |          |        |               |        |        |        |        |        |      |                                                                                                                                                                                                                                                                                                                                                                                                                  |
| X(X6S)                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                          |                    |                    |         |  |                                      |          |        |               |        |        |        |        |        |      |                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Y(X7S)                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                          |                    |                    |         |  |                                      |          |        |               |        |        |        |        |        |      |                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Z(X7T)                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                          |                    |                    |         |  |                                      |          |        |               |        |        |        |        |        |      |                                                                                                                                                                                                                                                                                                                                                                                                                  |
| F(Y5V)                | ±30%                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                          |                    |                    |         |  |                                      |          |        |               |        |        |        |        |        |      |                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Q(Class I)            | Capacitance≥30pF : Q≥350<br>10pF≤Capacitance<30pF : Q≥275+2.5×C<br>Capacitance < 10pF: Q≥200+10×C<br>(C: Capacitance)                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                          |                    |                    |         |  |                                      |          |        |               |        |        |        |        |        |      |                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Tanδ(Class II)        | <b>1. Capacitance : A (X5R)</b><br>0.05 max / 0.075 max* (35V / 50V)<br>0.05 max / 0.075 max* / 0.125 max*(16V / 25V)<br>0.075 max / 0.125 max* (≤10V)<br><br><b>2. Capacitance : B (X7R), X (X6S)</b><br>0.05 max / 0.125 max* (16V / 25V / 35V / 50V≥)<br>0.075 max / 0.125 max* (≤10V)<br><br><b>3. Capacitance : F (Y5V)</b><br>0.09 max (50V)<br>0.09 max / 0.125 max* (25V / 35V)<br>0.09 max / 0.125 max* / 0.16 max* (16V)<br>0.16 max / 0.195 max* (10V)<br>0.195 max (4V / 6.3V) |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                          |                    |                    |         |  |                                      |          |        |               |        |        |        |        |        |      |                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Insulation resistance | 1,000MΩmin. or 50MΩ·μFmin. product whichever is smaller / 25MΩ·μF for over*                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                          |                    |                    |         |  |                                      |          |        |               |        |        |        |        |        |      |                                                                                                                                                                                                                                                                                                                                                                                                                  |



# Reliability Test Conditions

| No.                   | Item                               | Performance                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Test condition                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                    |           |                    |         |                      |                                      |          |        |                         |        |                      |        |             |        |        |        |
|-----------------------|------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|-----------|--------------------|---------|----------------------|--------------------------------------|----------|--------|-------------------------|--------|----------------------|--------|-------------|--------|--------|--------|
| 14                    | Appearance                         | No mechanical damage shall occur                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Capacitor shall be subjected to 5 cycles.<br>Condition for 1 cycle : <table border="1" style="margin-top: 10px;"> <thead> <tr> <th>Step</th> <th>Temp.(°C)</th> <th>Time(min.)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Min.rated temp.+0/-3</td> <td>30</td> </tr> <tr> <td>2</td> <td>25</td> <td>2~3</td> </tr> <tr> <td>3</td> <td>Max.rated temp.+3/-0</td> <td>30</td> </tr> <tr> <td>4</td> <td>25</td> <td>2~3</td> </tr> </tbody> </table><br>Leave the capacitor in ambient condition for specified time before measurement.<br>* 24±2 Hours (Class I)<br>24±2 Hours (Class II) | Step               | Temp.(°C) | Time(min.)         | 1       | Min.rated temp.+0/-3 | 30                                   | 2        | 25     | 2~3                     | 3      | Max.rated temp.+3/-0 | 30     | 4           | 25     | 2~3    |        |
|                       | Step                               | Temp.(°C)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Time(min.)         |           |                    |         |                      |                                      |          |        |                         |        |                      |        |             |        |        |        |
|                       | 1                                  | Min.rated temp.+0/-3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 30                 |           |                    |         |                      |                                      |          |        |                         |        |                      |        |             |        |        |        |
|                       | 2                                  | 25                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 2~3                |           |                    |         |                      |                                      |          |        |                         |        |                      |        |             |        |        |        |
|                       | 3                                  | Max.rated temp.+3/-0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 30                 |           |                    |         |                      |                                      |          |        |                         |        |                      |        |             |        |        |        |
|                       | 4                                  | 25                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 2~3                |           |                    |         |                      |                                      |          |        |                         |        |                      |        |             |        |        |        |
|                       | Capacitance                        | <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2">Capacitance change</th> <th>Capacitance change</th> </tr> </thead> <tbody> <tr> <td colspan="2">Class I</td> <td>±2.5% or ±0.25pF whichever is larger</td> </tr> <tr> <td rowspan="5">Class II</td> <td>A(X5R)</td> <td>Within ±7.5%/±10%/±15%*</td> </tr> <tr> <td>B(X7R)</td> <td>Within ±7.5%</td> </tr> <tr> <td>X(X6S)</td> <td rowspan="3">Within ±15%</td> </tr> <tr> <td>Y(X7S)</td> </tr> <tr> <td>Z(X7T)</td> </tr> <tr> <td>F(Y5V)</td> <td>Within ±20%</td> </tr> </tbody> </table> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Capacitance change |           | Capacitance change | Class I |                      | ±2.5% or ±0.25pF whichever is larger | Class II | A(X5R) | Within ±7.5%/±10%/±15%* | B(X7R) | Within ±7.5%         | X(X6S) | Within ±15% | Y(X7S) | Z(X7T) | F(Y5V) |
| Capacitance change    |                                    | Capacitance change                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                    |           |                    |         |                      |                                      |          |        |                         |        |                      |        |             |        |        |        |
| Class I               |                                    | ±2.5% or ±0.25pF whichever is larger                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                    |           |                    |         |                      |                                      |          |        |                         |        |                      |        |             |        |        |        |
| Class II              |                                    | A(X5R)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Within ±7.5%/±10%/±15%*                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                    |           |                    |         |                      |                                      |          |        |                         |        |                      |        |             |        |        |        |
|                       |                                    | B(X7R)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Within ±7.5%                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                    |           |                    |         |                      |                                      |          |        |                         |        |                      |        |             |        |        |        |
|                       |                                    | X(X6S)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Within ±15%                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                    |           |                    |         |                      |                                      |          |        |                         |        |                      |        |             |        |        |        |
|                       | Y(X7S)                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                    |           |                    |         |                      |                                      |          |        |                         |        |                      |        |             |        |        |        |
|                       | Z(X7T)                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                    |           |                    |         |                      |                                      |          |        |                         |        |                      |        |             |        |        |        |
| F(Y5V)                | Within ±20%                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                    |           |                    |         |                      |                                      |          |        |                         |        |                      |        |             |        |        |        |
| Q(Class I)            | Within the specified initial value |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                    |           |                    |         |                      |                                      |          |        |                         |        |                      |        |             |        |        |        |
| Tanδ(Class II)        | Within the specified initial value |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                    |           |                    |         |                      |                                      |          |        |                         |        |                      |        |             |        |        |        |
| Insulation resistance | Within the specified initial value |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                    |           |                    |         |                      |                                      |          |        |                         |        |                      |        |             |        |        |        |

Note 1. Initial Measurement For Class II  
Perform the heat treatment at 150°C +0/-10°C for 1 hour. Then Leave the capacitor in ambient condition for 24±2 hours before measurement  
Then perform the measurement.

Note 2. Latter Measurement

1. CLASS I  
Leave the capacitor in ambient condition for 24±2 hours before measurement. Then perform the measurement.
2. CLASS II  
Perform the heat treatment at 150°C +0/-10°C for 1 hour. Then Leave the capacitor in ambient condition for 24±2 hours before measurement.  
Then perform the measurement.

Note 3. All Size in Reliability Test Condition Section is "inch"

Note 4. Camera Strobe Circuit Capacitors Should be Following a Special Reliability Test Condition.  
Please check with our sales representatives or product engineers.

# Packaging Specifications

## Packaging

This specification applies to taping of MLCC.

When customers require, the specification may be changed under the agreement.

### 1 Figure



\* The chip is only use for identifying the label and packaged products. Please don't use the chip.

### 2 Quantity


(Unit : pcs)

| Type      | Size (inch/mm) | Chip Thickness (mm) | Taping Type | Pitch (mm) | Plastic 7 inches reel | Plastic 10 inches reel | Plastic 13 inches reel |
|-----------|----------------|---------------------|-------------|------------|-----------------------|------------------------|------------------------|
| MLCC      | 008004/0201    | 0.125               | EMBOSSSED   | 1          | 20K/50K               | -                      | -                      |
|           | 01005/0402     | 0.2                 | PAPER       | 2          | 20k                   | -                      | 100K                   |
|           | 0201/0603      | 0.3                 | PAPER       | 2          | 10K                   | -                      | 50K                    |
|           | 0402/1005      | 0.5                 | PAPER       | 2          | 10K                   | -                      | 50K                    |
|           | 0603/1608      | 0.8                 | PAPER       | 4          | 4K                    | 10K                    | 15K/10K                |
|           |                | 1.0                 | EMBOSSSED   | 4          | 3K                    | -                      | -                      |
|           | 0805/2012      | T ≤ 0.85            | PAPER       | 4          | 4K                    | 10K                    | 15K/10K                |
|           |                | T ≥ 1.0             | EMBOSSSED   | 4          | 2K                    | 6K                     | 10K                    |
|           | 1206/3216      | T ≤ 0.85            | PAPER       | 4          | 4K                    | 10K                    | 10K                    |
|           |                | T ≥ 1.0             | EMBOSSSED   | 4          | 2K                    | 4K                     | 10K                    |
|           | 1210/3225      | T ≤ 1.6             | EMBOSSSED   | 4          | 2K                    | 4K                     | 10K                    |
|           |                | T ≥ 2.0             | EMBOSSSED   | 4          | 1K                    | 4K                     | 4K                     |
|           | 1808/4520      | T ≤ 1.6             | EMBOSSSED   | 8          | 2k                    | -                      | 8k                     |
|           |                | T ≥ 2.0             | EMBOSSSED   | 8          | 1k                    | -                      | 4k                     |
|           | 1812/4532      | T ≤ 2.0             | EMBOSSSED   | 8          | -                     | -                      | 4K                     |
| T > 2.0   |                | EMBOSSSED           | 8           | -          | -                     | 2K                     |                        |
| 2220/5750 | T ≥ 2.5        | EMBOSSSED           | 8           | -          | -                     | 2K                     |                        |

# Packaging Specifications

## 3 Tape Size

### I. Cardboard(Paper) tape : 4mm pitch

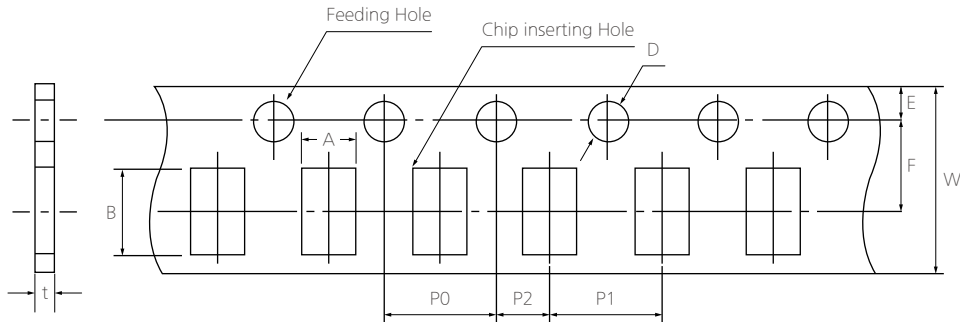

(Unit : mm)

| Size (inch/mm) | A             | B             | W             | F             | E             | P1            | P2            | P0            | D                 | t            |
|----------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|-------------------|--------------|
| 0603/<br>1608  | 1.00<br>±0.10 | 1.90<br>±0.10 | 8.00<br>±0.30 | 3.50<br>±0.05 | 1.75<br>±0.10 | 4.00<br>±0.10 | 2.00<br>±0.05 | 4.00<br>±0.10 | φ1.50<br>+0.10/-0 | 1.1<br>Below |
| 0805/<br>2012  | 1.55<br>±0.10 | 2.30<br>±0.10 |               |               |               |               |               |               |                   |              |
| 1206/<br>3216  | 2.05<br>±0.10 | 3.60<br>±0.10 |               |               |               |               |               |               |                   |              |

※ The A, B in the table above are based on normal dimensions. The data may be changed with the special size tolerances.

### II. Cardboard(Paper) tape (P1 : 1mm/2mm pitch )



(Unit : mm)

| Size (inch/mm) | A              | B              | W             | F             | E             | P1                              | P2                              | P0            | D                   | t             |
|----------------|----------------|----------------|---------------|---------------|---------------|---------------------------------|---------------------------------|---------------|---------------------|---------------|
| 01005/<br>0402 | 0.25<br>±0.02  | 0.46<br>±0.02  | 8.00<br>±0.30 | 3.50<br>±0.05 | 1.75<br>±0.10 | 2.00<br>±0.05<br>(1.0±<br>0.05) | 2.00<br>±0.05<br>(1.0±<br>0.05) | 4.00<br>±0.10 | φ1.50<br>+0.1/-0.03 | 0.25<br>±0.02 |
| 0201/<br>0603  | 0.38<br>±0.03  | 0.68<br>±0.03  |               |               |               |                                 |                                 |               |                     | 0.35<br>±0.03 |
| 0402/<br>1005  | 0.62<br>±0.05  | 1.12<br>±0.05  |               |               |               |                                 |                                 |               |                     | 0.60<br>±0.05 |
| 0204/<br>0510  | 0.62<br>/-0.10 | 1.12<br>/-0.10 |               |               |               |                                 |                                 |               |                     | 0.37<br>±0.03 |


※ The A, B in the table above are based on normal dimensions. The data may be changed with the special size tolerances.

※ ( ) is based on 1mm pitch paper tape


# Packaging Specifications

## III. Embossed (Plastic) tape

### (1) Embossed (Plastic) tape (P1: 4mm pitch)

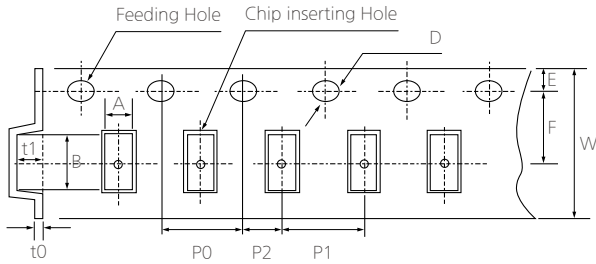

### (2) Embossed (Plastic) tape (P1: 1mm/ 2mm pitch)

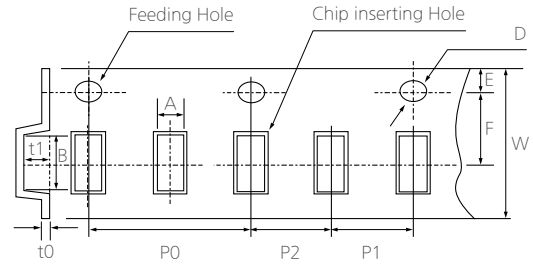

(Unit : mm)

| Size (inch/mm)   | A                      | B                      | W             | F             | E             | P1            | P2            | P0              | D                  | t1            | t0            |
|------------------|------------------------|------------------------|---------------|---------------|---------------|---------------|---------------|-----------------|--------------------|---------------|---------------|
| 01005/<br>0402   | 0.23<br>±0.02          | 0.45<br>±0.02          | 4.00<br>±0.05 | 1.80<br>±0.02 | 0.90<br>±0.05 | 1.00<br>±0.02 | 1.00<br>±0.02 | 2.00<br>±0.03   | φ0.80<br>±0.04     | 0.35<br>Below | 0.50<br>Below |
| 015008/<br>05025 | 0.32<br>±0.03          | 0.58<br>±0.03          | 8.00<br>±0.30 | 3.50<br>±0.05 | 1.75<br>±0.10 | 2.00<br>±0.05 | 2.00<br>±0.05 | 4.00<br>±0.10   | φ1.50<br>0.1/-0.03 |               |               |
| 0603/<br>1608    | 1.05<br>±0.15          | 1.90<br>±0.15          |               |               |               | 4.00<br>±0.10 |               |                 | φ1.50<br>0.1/-0    |               |               |
| 0805/<br>2012    | 1.45<br>±0.20          | 2.30<br>±0.20          |               |               |               |               |               |                 |                    | 2.92<br>Below |               |
| 1206/<br>3216    | 1.90<br>±0.20          | 3.50<br>±0.20          |               |               |               |               |               |                 |                    |               |               |
| 1210/<br>3225    | 2.80<br>±0.20          | 3.60<br>±0.20          |               |               |               | 8.00<br>±0.30 |               |                 | 5.60<br>±0.05      | 1.75<br>±0.10 | 2.00<br>±0.05 |
| 1808/<br>4520    | 2.30<br>±0.20          | 4.90<br>±0.20          |               |               |               |               |               |                 |                    |               |               |
| 1812/<br>4532    | 3.60<br>±0.20          | 4.90<br>±0.20          |               |               |               |               |               |                 |                    |               |               |
| 2220/<br>5750    | 5.50<br>±0.20          | 6.20<br>±0.20          | 8.00<br>±0.30 | 3.50<br>±0.05 | 1.75<br>±0.10 | 2.00<br>±0.05 | 4.00<br>±0.10 | φ1.50<br>0.1/-0 | 3.80<br>Below      | 0.60<br>Below |               |
| 0204/<br>0510    | 0.62<br>0.05<br>/-0.10 | 1.12<br>0.05<br>/-0.10 |               |               |               |               |               |                 |                    |               | 2.50<br>Below |
| 0306/<br>0816    | 1.10<br>±0.20          | 1.90<br>±0.20          |               |               |               |               |               |                 |                    |               |               |

※ The A, B in the table above are based on normal dimensions. The data may be changed with the special size tolerances.

# Packaging Specifications

## IV. Reel Size



(Unit : mm)

| Symbol  | Tape Width | A                  | B             | C                 | D            | E             | W            | t             |
|---------|------------|--------------------|---------------|-------------------|--------------|---------------|--------------|---------------|
| 7"Reel  | 4mm        | $\phi 178 \pm 2.0$ | MIN $\phi 50$ | $\phi 13 \pm 0.5$ | $21 \pm 0.8$ | $2.0 \pm 0.5$ | $5 \pm 0.5$  | $1.2 \pm 0.2$ |
|         | 8mm        | $\phi 178 \pm 2.0$ | MIN $\phi 50$ | $\phi 13 \pm 0.5$ | $21 \pm 0.8$ | $2.0 \pm 0.5$ | $10 \pm 1.5$ | $0.9 \pm 0.2$ |
|         | 12mm       | $\phi 178 \pm 2.0$ | MIN $\phi 50$ | $\phi 13 \pm 0.5$ | $21 \pm 0.8$ | $2.0 \pm 0.5$ | $13 \pm 0.5$ | $1.2 \pm 0.2$ |
| 10"Reel | 8mm        | $\phi 258 \pm 2.0$ | MIN $\phi 70$ | $\phi 13 \pm 0.5$ | $21 \pm 0.8$ | $2.0 \pm 0.5$ | $10 \pm 1.5$ | $1.8 \pm 0.2$ |
| 13"Reel | 8mm        | $\phi 330 \pm 2.0$ | MIN $\phi 70$ | $\phi 13 \pm 0.5$ | $21 \pm 0.8$ | $2.0 \pm 0.5$ | $10 \pm 1.5$ | $1.8 \pm 0.2$ |
|         | 12mm       | $\phi 330 \pm 2.0$ | MIN $\phi 70$ | $\phi 13 \pm 0.5$ | $21 \pm 0.8$ | $2.0 \pm 0.5$ | $13 \pm 0.5$ | $2.2 \pm 0.2$ |

### 4 Cover tape peel-off force

#### I. Peel-off force

$10 \text{ g.f} \leq \text{peel-off force} \leq 70 \text{ g.f}$

#### II. Measurement Method



- Taping Packaging design : Packaging design follows IEC 60286-3 standard.  
 (IEC 60286-3 Packaging of components for automatic handling - parts 3)  
 \* If the static electricity of SMT process causes any problems, please contact us.

# Packaging Specifications

## 5 BOX package

### I. Packaging Label

REEL & Box Type

Label includes the information as below.



- 1) Chip size
- 2) Temperature Characteristics
- 3) Nominal Capacitance
- 4) Model Name
- 5) LOT Number & Reel Number
- 6) Q'ty

### II. Box Packaging

- 1) Double packaging with the paper type of inner box and outer box.
- 2) Avoid any damages during transportation by car, airplane and ship.
- 3) Remark information of contents on inner box and outer box

※ If special packaging is required, please contact us.

### III. 7" Box packaging

(Unit : mm)

#### ■ Inner Box (7" × 5 REEL)



#### ■ Inner Box (7" × 10 REEL)



#### ■ Outer Box (7" × 20 REEL)



#### ■ Outer Box (7" × 60 REEL)




# Packaging Specifications

## IV. 13" Box packaging

■ Inner Box (13" × 4 REEL)



■ Outer Box (13" × 20 REEL)

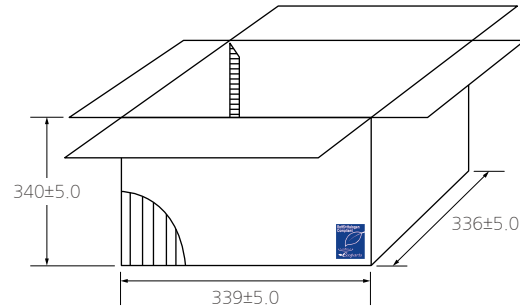

## 6 Chip Weight

| Size (L/W)<br>(inch/mm) | Size (T)<br>(mm) | Temp | Weight<br>(mg/pc) |
|-------------------------|------------------|------|-------------------|
| 01005/0402              | 0.20             | C0G  | 0.082             |
|                         | 0.20             | X7R  | 0.083             |
|                         | 0.20             | X5R  | 0.093             |
| 0201/0603               | 0.30             | C0G  | 0.233             |
|                         | 0.30             | X7R  | 0.285             |
|                         | 0.30             | X5R  | 0.317             |
| 0402/1005               | 0.50             | C0G  | 1.182             |
|                         | 0.50             | X7R  | 1.559             |
|                         | 0.50             | X5R  | 1.56              |
| 0603/1608               | 0.80             | C0G  | 4.615             |
|                         | 0.80             | X7R  | 5.522             |
|                         | 0.80             | X5R  | 5.932             |
| 0805/2012               | 0.65             | C0G  | 7.192             |
|                         | 1.25             | X7R  | 16.523            |
|                         | 1.25             | X5R  | 16.408            |
| 1206/3216               | 1.25             | C0G  | 28.086            |
|                         | 1.60             | X7R  | 54.05             |
|                         | 1.60             | X5R  | 45.6              |
| 1210/3225               | 2.50             | X7R  | 116.197           |
|                         | 2.50             | X5R  | 121.253           |
| 1808/4520               | 1.25             | C0G  | 47.382            |
|                         | 1.25             | X7R  | 63.136            |
| 1812/4532               | 1.25             | X7R  | 96.697            |
| 2220/5750               | 1.60             | X7R  | 260.897           |

※ The weight of product is typical value per size, for more details, please contact us.

# Caution/Notice

## Product Characteristic data

### 1 Capacitance

The capacitance is the ratio of the change in an electric charge according to voltage change. Due to the fact that the capacitance may be subject to change with the measured voltage and frequency, it is highly recommended to measure the capacitance based on the following conditions.

**I.** Measure capacitance with voltage and frequency specified in this document.

Regarding the voltage/frequency condition for capacitance measurement of each MLCC model, please make sure to follow a section "C. Reliability test Condition - Capacitance" in this document.

The following table shows the voltage and frequency condition according to the capacitance range.  
[The voltage and frequency condition according to MLCC the capacitance range]

Class I

| Capacitance | Frequency | Voltage   |
|-------------|-----------|-----------|
| ≤1,000pF    | 1kHz±10%  | 0.5~5Vrms |
| >1,000pF    | 1kHz±10%  |           |

Class II

| Capacitance | Frequency | Voltage     |
|-------------|-----------|-------------|
| ≤10μF       | 1kHz±10%  | 1.0±0.2Vrms |
| >10μF       | 120Hz±20% | 0.5±0.1Vrms |
| Exception   | 1kHz±10%  | 0.5±0.1Vrms |

※ Capacitance shall be measured after the heat treatment of 150+0/-10°C for 1hr, leaving at room temperature for 24±2hr. (Class II)

**II.** It is recommended to use measurement equipment with the ALC (Auto Level Control) option.

The reason is that when capacitance or measurement frequency is high, the output voltage of measurement equipment can be lower than the setting voltage due to the equipment limitation. Note that when capacitance or measurement frequency is excessively high, the measurement equipment may show ALC off warning and provide a lower output voltage than the setting voltage even with ALC option selected. It is necessary to ensure the output voltage of measurement equipment is the same as the setting voltage before measuring capacitance.

**III.** Capacitance value of high dielectric constant (Class II) MLCC changes with applied AC and DC voltage. Therefore, it is necessary to take into account MLCC's AC voltage characteristics and DC-bias voltage characteristics when applying MLCC to the actual circuit.

**IV.** The capacitance is in compliance with the EIA RS-198-1-F-2002.

### 2 Tan δ (DF)

**I.** An ideal MLCC's energy loss is zero, but real MLCC has dielectric loss and resistance loss of electrode. DF (Dissipation Factor) is defined as the ratio of loss energy to stored energy and typically being calculated as percentage.

**II.** Quality factor (Q factor) is defined as the ratio of stored energy to loss energy. The equation can be described as 1/DF. Normally the loss characteristic of Class I MLCC is presented in Q, since the DF value is so small whereas the loss characteristic of Class II MLCC is presented in DF.

**III.** It is recommended to use Class I MLCC for applications to require good linearity and low loss such as coupling circuit, filter circuit and time constant circuit.



# Caution/Notice

## 3 Insulation Resistance

Ceramic dielectric has a low leakage current with DC voltage due to the high insulating properties. Insulation resistance is defined as the ratio of a leakage current to DC voltage.

I. When applying DC voltage to MLCC, a charging current and a leakage current flow together at the initial stage of measurement.

While the charging current decreases, and insulation resistance (IR) in MLCC is saturated by time. Therefore, insulation resistance shall be measured 1 minute after applying the rated voltage.

## 4 Capacitance Aging

The aging characteristic is that the high dielectric (Class II) MLCC decreases capacitance value over time. It is also necessary to consider the aging characteristic with voltage and temperature characteristics when Class II MLCC is used in circuitry.

I. In general, aging causes capacitance to decrease linearly with the log of time as shown in the following graph. Please check with SEMCO for more details, since the value may vary between different models.

II. After heat treatment (150 °C, 1 hour), the capacitance decreased by aging is recovered, so aging should be considered again from the time of heat treatment.



[Example of Capacitance Aging]

# Caution/Notice

## 5 Temperature Characteristics of Capacitance (TCC)

Please consider temperature characteristics of capacitance since the electrical characteristics such as capacitance changes which is caused by a change in ceramic dielectric constant by temperature.

- I. It is necessary to check the values specified in section “C. Reliability test Condition-Temperature Characteristics” for the temperature and capacitance change range of MLCC.



[Example of Temperature Characteristics (X5R)]




[Example of Bias TCC]

- II. When selecting MLCC, it is necessary to consider the heat characteristics of a system, room temperature and TCC of MLCC, since the applied temperature may change the capacitance of MLCC.
- III. In addition, Bias TCC of MLCC should be taken into account when DC voltage is applied to MLCC.

## 6 Self-heating Temperature

It is necessary to design the system, with considering self-heating generated by the ESR (Equivalent Series Resistance) of MLCC when AC voltage or pulse voltage is applied to MLCC.

- I. When MLCC is used in an AC voltage or pulse voltage circuit, self-heating is generated when AC or pulse current flows through MLCC. Short-circuit may be occurred by the degradation of MLCC’s insulating properties.
- II. The reliability of MLCC may be affected by MLCC being used in an AC voltage or pulse voltage circuit, even the AC voltage or the pulse voltage is within the range of rated voltage. Therefore, make sure to check the following conditions.
  - 1) The surface temperature of MLCC must stay within the maximum operating temperature after AC or Pulse voltage is applied.
  - 2) The rise in increase by self-heating of MLCC must not exceed 20°C

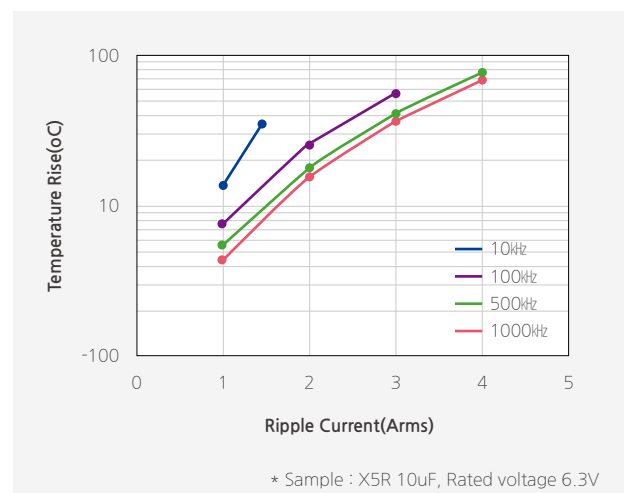

[Example of Ripple current]



# Caution/Notice

## 7 DC & AC Voltage Characteristics

It is required to consider voltage characteristics in the circuit since the capacitance value of high dielectric constant MLCC (Class II) is changed by applied DC & AC voltage.

- I. Please ensure the capacitance change is within the allowed operating range of a system. In particular, when high dielectric constant type MLCC (Class II) is used in circuit with narrow allowed capacitance tolerance, a system should be designed with considering DC voltage, temperature characteristics and aging characteristics of MLCC.
- II. It is necessary to consider the AC voltage characteristics of MLCC and the AC voltage of a system, since the capacitance value of high dielectric constant type MLCC (Class II) varies with the applied AC voltage.



[Example of DC Bias characteristics]



[Example of AC voltage characteristics]

# Caution/Notice

## 8 Impedance Characteristic

Electrical impedance (Z) of MLCC is the measurement of the opposition that MLCC presents to a current (I) when a voltage (V) is applied. It is defined as the ratio of the voltage to the current ( $Z=V/I$ ).

Impedance extends the concept of resistance to AC circuits and is a complex number consisting of the real part of resistance (R) and the imaginary part of reactance (X) as  $Z=R+jX$ .

Therefore, it is required to design circuit with consideration of the impedance characteristics of MLCC based on the frequency ( $Z=R+jX$ ).


**I.** MLCC operates as a capacitor in the low frequency and its reactance (XC) decreases as frequency increases ( $X_C=1/j2\pi fC$ ) where f is frequency and C is capacitance.

The resistance (ESR; Equivalent Series Resistance) of MLCC in the low frequency mainly comes from the loss of its dielectric material.

**II.** MLCC operates as an inductor in the high frequency and the inductance of MLCC is called ESL (Equivalent Series Inductance). The reactance (XL) of MLCC in the high frequency increases as frequency increases ( $X_L=j2\pi f \cdot ESL$ ). The resistance (ESR) of MLCC in the high frequency mainly comes from the loss of its electrode metal.

**III.** SRF (Self Resonant Frequency) of MLCC is the frequency where its capacitive reactance (XC) and inductive reactance(XL) cancel each other and the impedance of MLCC has only ESR at SRF.

**IV.** The impedance of MLCC can be measured by a network analyzer or an impedance analyzer. When using the network analyzer, please note that the small-signal input may lead to the impedance of low capacitance caused by the AC voltage characteristic of MLCC.

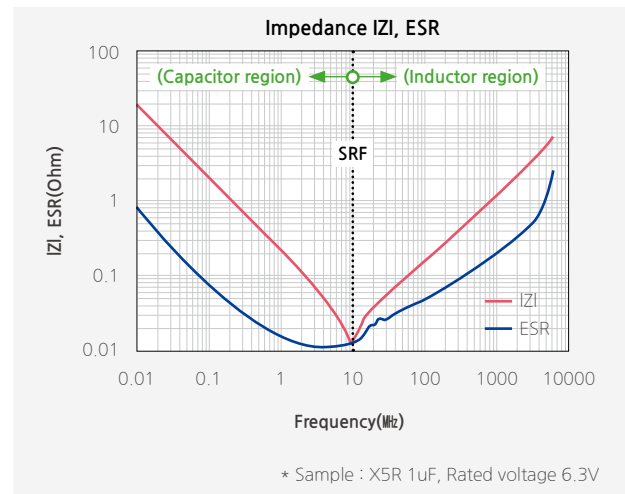

[Example of Impedance characteristics]

# Caution/Notice

## Electrical & Mechanical Caution

### 1 Derating

MLCC with the test voltage at 100% of the rated voltage in the high temperature resistance test are labeled as “derated MLCC.” For this type of MLCC, the voltage and temperature should be derated as shown in the following graph for the equivalent life time of a normal MLCC with the test voltage at 150% of the rated voltage in the high temperature resistance test.

- I. The derated MLCC should be applied with the derating voltage and temperature as shown in the following graph.
- II. The “Temperature of MLCC” in the x-axis of the graph below indicates the surface temperature of MLCC including self-heating effect. The “Voltage Derating Ratio” in the y-axis of the graph below gives the maximum operating voltage of MLCC with reference to the maximum voltage (Vmax) as defined in section “3-2. Applied Voltage.”



[Example of derating graph for derated MLCC]

### 2 Applied Voltage

The actual applied voltage on MLCC should not exceed the rated voltage set in the specifications.

#### I. Cautions by types of voltage applied to MLCC

- For DC voltage or DC+AC voltage, DC voltage or the maximum value of DC + AC voltage should not exceed the rated voltage of MLCC.
- For AC voltage or pulse voltage, the peak-to-peak value of AC voltage or pulse voltage should not exceed the rated voltage of MLCC.
- Abnormal voltage such as surge voltage, static electricity should not exceed the rated voltage of MLCC.



[Types of Voltage Applied to the Capacitor]

# Caution/Notice

## II. Effect of EOS (Electrical Overstress)

- Electrical Overstress such as a surge voltage or EOS can cause damages to MLCC, resulting in the electrical short failure caused by the dielectric breakdown in MLCC.
- Down time of MLCC is varied with the applied voltage and the room temperature and a dielectric shock caused by EOS can accelerate heating on the dielectric. Therefore, it can bring about a failure of MLCC in a market at the early stage.
- Please use caution not to apply excessive electrical overstress including spike voltage MLCC when preparing MLCC for testing or evaluating.

### (1) Surge

When the overcurrent caused by surge is applied to MLCC, the influx of current into MLCC can induce the overshooting phenomenon of voltage as shown in the graph below and result in the electrical short failure in MLCC. Therefore, it is necessary to be careful to prevent the influx of surge current into MLCC.

### (2) ESD (Electrostatic Discharge)

Since the voltage of the static electricity is very high but the quantity of electric charge is small compared to the surge, ESD can cause damage to MLCC with low capacitance as shown in the following graph, whereas surge with lots of electric charge quantity can cause damages to even high capacitance MLCC.



[Example of Surge applied to MLCC]



[Example of ESD applied to MLCC]

## 3 Vibration

Please check the types of vibration and shock, and the status of resonance. Manage MLCC not to generate resonance and avoid any kind of impact to terminals. When MLCC is used in a vibration environment, please make sure to contact us for the situation and consider special MLCC such as Soft-term, etc.

## 4 Shock

Mechanical stress caused by a drop may cause damages to a dielectric or a crack in MLCC. Do not use a dropped MLCC to avoid any quality and reliability deterioration. When piling up or handling printed circuit boards, do not hit MLCC with the corners of a PCB to prevent cracks or any other damages to the MLCC.

## 5 Piezo-electric Phenomenon

MLCC may generate a noise due to vibration at specific frequency when using the high dielectric constant MLCC (Class II) at AC or Pulse circuits. MLCC may cause a noise if MLCC is affected by any mechanical vibrations or shocks.

# Caution/Notice

## Process of Mounting and Soldering

### I Mounting

MLCC with the test voltage at 100% of the rated voltage in the high temperature resistance test are labeled as “derated MLCC.” For this type of MLCC, the voltage and temperature should be derated as shown in the following graph for the equivalent life time of a normal MLCC with the test voltage at 150% of the rated voltage in the high temperature resistance test.

#### I. Mounting position

It is recommended to locate the major axis of MLCC in parallel to the direction in which the stress is applied.



#### II. Cautions during mounting near the cutout

Please take the following measures to effectively reduce the stress generated from the cutting of PCB. Select the mounting location shown below, since the mechanical stress is affected by a location and a direction of MLCC mounted near the cutting line.



#### III. Cautions during mounting near screw

If MLCC is mounted near a screw hole, the board deflection may be occurred by screw torque. Mount MLCC as far from the screw holes as possible.



# Caution/Notice

## 2 Caution before Mounting

- I. It is recommended to store and use MLCC in a reel. Do not re-use MLCC that was isolated from the reel.
- II. Check the capacitance characteristics under actual applied voltage.
- III. Check the mechanical stress when actual process and equipment is in use.
- IV. Check the rated capacitance, rated voltage and other electrical characteristics before assembly. Heat treatment must be done prior to measurement of capacitance.
- V. Check the solderability of MLCC that has passed shelf life before use.
- VI. The use of Sn-Zn based solder may deteriorate the reliability of MLCC.

## 3 Cautions during Mounting with Mounting (pick-and-place) Machines

### I. Mounting Head Pressure

Excessive pressure may cause cracks in MLCC. It is recommended to adjust the nozzle pressure within the maximum value of 300g.f. Additional conditions must be set for both thin film and special purpose MLCC.

### II. Bending Stress

When using a two-sided substrate, it is required to mount MLCC on one side first before mounting on the other side due to the bending of the substrate caused by the mounting head.

Support the substrate as shown in the picture below when MLCC is mounted on the other side.  
If the substrate is not supported, bending of the substrate may cause cracks in MLCC.



### III. Suction nozzle

Dust accumulated in a suction nozzle and suction mechanism can impede a smooth movement of the nozzle. This may cause cracks in MLCC due to the excessive force during mounting.

If the mounting claw is worn out, it may cause cracks in MLCC due to the uneven force during positioning.

A regular inspection such as maintenance, monitor and replacement for the suction nozzle and mounting claw should be conducted.


# Caution/Notice

## 4 Reflow soldering

MLCC is in a direct contact with the dissolved solder during soldering, which may be exposed to potential mechanical stress caused by the sudden temperature change.  
Therefore, MLCC may be contaminated by the location movement and flux.  
For the reason, the mounting process must be closely monitored.

| Method           |                 | Classification   |
|------------------|-----------------|------------------|
| Reflow soldering | Overall heating | Infrared rays    |
|                  |                 | Hot plate        |
|                  |                 | VPS(Vapor phase) |
|                  | Local heating   | Air heater       |
|                  |                 | Laser            |
|                  |                 | Light beam       |

### I . Reflow Profile

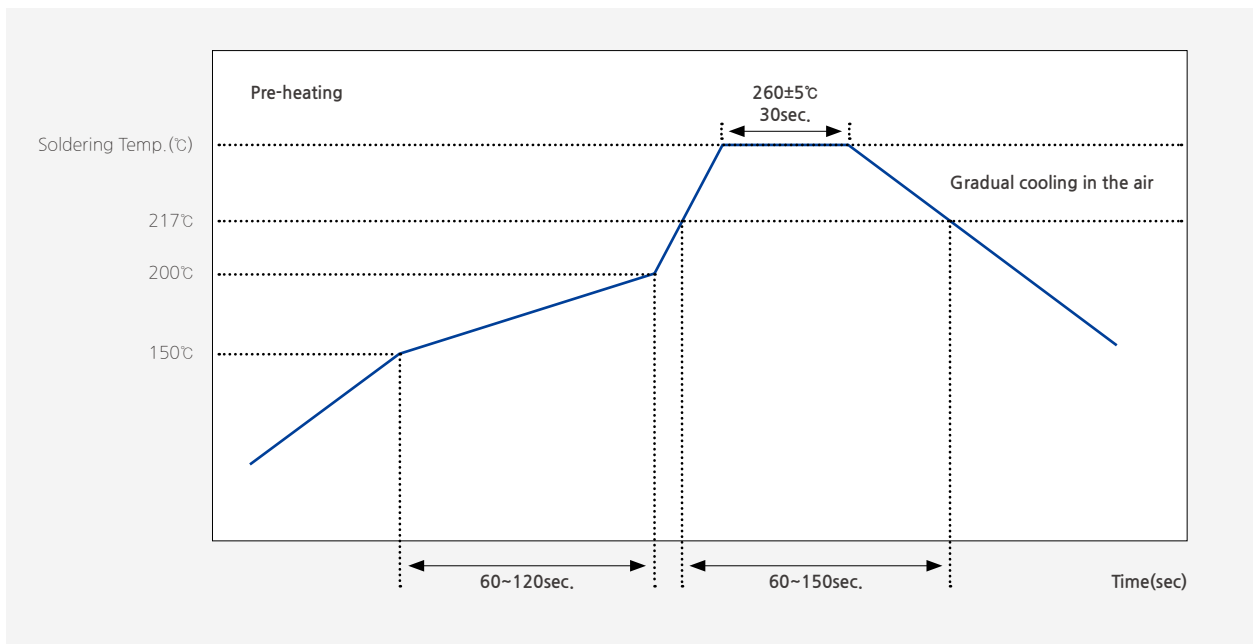

[Reflow Soldering Conditions]

Use caution not to exceed the peak temperature (260°C) and time (30sec) as shown.  
Pre-heating is necessary for all constituents including the PCB to prevent the mechanical damages on MLCC. The temperature difference between the PCB and the component surface must be kept to the minimum.

As for reflow soldering, it is recommended to keep the number of reflow soldering to less than three times. Please check with us when the number of reflow soldering needs to exceed three times. Care must be exercised especially for the ultra-small size, thin film and high capacitance MLCC as they can be affected by thermal stress more easily.



# Caution/Notice

## II. Reflow temperature

The following quality problem may occur when MLCC is mounted with a lower temperature than the reflow temperature recommended by a solder manufacturer. The specified peak temperature must be maintained after taking into consideration the factors such as the placement of peripheral constituent and the reflow temperature.

- Drop in solder wettability
- Solder voids
- Potential occurrence of whisker
- Drop in adhesive strength
- Drop in self-alignment properties
- Potential occurrence of tombstones

## III. Cooling

Natural cooling with air is recommended.

## IV. Optimum solder flux for reflow soldering

- Overly the thick application of solder pastes results in an excessive solder fillet height.
- This makes MLCC more vulnerable to the mechanical and thermal stress from the board, which may cause cracks in MLCC.
- Too little solder paste results in a lack of the adhesive strength, which may cause MLCC to isolate from PCB
- Check if solder has been applied uniformly after soldering is completed.



Too Much Solder  
large stress may cause cracks



Not enough solder  
Weak holding force may cause bad connections or detaching of the capacitor

- It is required to design a PCB with consideration of a solder land pattern and its size to apply an appropriate amount of solder to MLCC. The amount of the solder at the edge may impact directly on cracks in MLCC.
- The design of a suitable solder land is necessary since the more the solder amount is, the larger the force MLCC experiences and the higher the chance MLCC cracks.



# Caution/Notice

## 5 Flow soldering

### I. Flow profile



[Flow Soldering Conditions]

Take caution not to exceed peak temperature (260°C) and time (5sec) as shown.  
Please contact us before use the type of high capacitance and thin film MLCC for some exceptions that may be caused.

### II. Caution before Flow soldering

- When a sudden heat is applied to MLCC, the mechanical rigidity of MLCC is deteriorated by the internal deformation of MLCC. Preheating all the constituents including PCB is required to prevent the mechanical damages on MLCC. The temperature difference between the solder and the surface of MLCC must be kept to the minimum.
- If the flow time is too long or the flow temperature is too high, the adhesive strength with PCB may be deteriorated by the leaching phenomenon of the outer termination, or the capacitance value may be dropped by weak adhesion between the internal termination and the outer termination.



# Caution/Notice

## 6 Soldering Iron

Manual soldering can pose a great risk on creating thermal cracks in MLCC. The high temperature soldering iron tip may come into a direct contact with the ceramic body of MLCC due to the carelessness of an operator. Therefore, the soldering iron must be handled carefully, and close attention must be paid to the selection of the soldering iron tip and to temperature control of the tip.

### I. How to use a soldering iron

- In order to minimize damages on MLCC, preheating MLCC and PCB is necessary.
- A hot plate and a hot air type preheater should be used for preheating
- Do not cool down MLCC and PCB rapidly after soldering.
- Keep the contact time between the outer termination of MLCC and the soldering iron as short as possible. Long soldering time may cause problems such as adhesion deterioration by the leaching phenomenon of the outer termination.

| Variation of Temp.  | Soldering Temp.(°C) | Pre-heating Time(sec) | Soldering Time(sec) | Cooling Time(sec) |
|---------------------|---------------------|-----------------------|---------------------|-------------------|
| $\Delta T \leq 130$ | 300±10°C max        | ≥60                   | ≤4                  | -                 |

\* Control  $\Delta T$  in the solder iron and preheating temperature.

| Condition of Iron facilities |              |                |
|------------------------------|--------------|----------------|
| Wattage                      | Tip diameter | Soldering time |
| 20W max                      | 3mm max      | 4sec max       |

\* Caution - Iron tip should not contact with ceramic body directly  
Lead-free solder: Sn-3.0Ag-0.5Cu

### II. How to use a spot heater

Compared to local heating using a solder iron, heat by a spot heater heats the overall MLCC and the PCB, which is likely to lessen the thermal shocks.

For a high density PCB, a spot heater can prevent the problem to connect between a solder iron and MLCC directly.

- If the distance from the air nozzle outlet to MLCC is too close, MLCC may be cracked due to the thermal stress. Follow the conditions set in the table below to prevent this problem.
- The spot heater application angle as shown in the figure is recommended to create a suitable solder fillet shape.
- In case that heat of higher than 350°C is applied to MLCC containing epoxy material, the epoxy material in MLCC may be damaged by heat.

|                                   |         |
|-----------------------------------|---------|
| Distance                          | ≥ 5mm   |
| Hot Air Application angle         | 45°     |
| Hot Air Temperature Nozzle Outlet | ≤ 400°C |
| Application Time                  | ≤ 10s   |





# Caution/Notice

## III. Cautions for re-work

- Too much solder amount will increase the risk of PCB bending or cause other damages.
- Too little solder amount will result in MLCC breaking loose from the PCB due to the inadequate adhesive strength.
- Check if the solder has been applied properly and ensure the solder fillet has a proper shape.



## 7 Cleaning

### I. In general, cleaning is unnecessary if rosin flux is used.

When acidic flux is used strongly, chlorine in the flux may dissolve into some types of cleaning fluids, thereby affecting the performance of MLCC.

This means that the cleansing solution must be carefully selected and should always be new.

### II. Cautions for cleaning

MLCC or solder joint may be cracked with the vibration of PCB, if ultrasonic vibration is too strong during cleaning. When high pressure cleaning equipment is used, test should be done for the cleaning equipment and its process before the cleaning in order to avoid damages on MLCC.

## 8 Cautions for using electrical measuring probes

- Confirm the position of the support pin or jig when checking the electrical performance of MLCC after mounting on the PCB.
- Watch for PCB bending caused by the pressure of a test-probe or other equipment.
- If the PCB is bent by the force from the test probe, MLCC may be cracked or the solder joint may be damaged.
- Avoid PCB flexing by using the support pin on the back side of the PCB.
- Place equipment with the support pin as close to the test-probe as possible.
- Prevent shock vibrations of the board when the test-probe contacts a PCB.



Not recommended



Recommended

# Caution/Notice

## 9 Printed Circuit Board Cropping

- Do not apply any stress to MLCC such as bending or twisting the board after mounting MLCC on the PCB.
- The stress as shown may cause cracks in MLCC when cutting the board.
- Cracked MLCC may cause degradation to the insulation resistance, thereby causing short circuit.
- Avoid these types of stresses applied to MLCC.



### I. Cautions for cutting PCB

Check a cutting method of PCB in advance.

The high density board is separated into many individual boards after the completion of soldering.  
 If the board is bent or deformed during separation, MLCC may be cracked.  
 Carefully select a separation method that minimizes the deformation of the PCB.

## 10 Assembly Handling

### I. Cautions for PCB handling

Hold the edges of the board mounted with MLCC with both hands since holding with one hand may bend the board.  
 Do not use dropped boards, which may degrade the quality of MLCC.

### II. Mounting other components

Pay attention to the following conditions when mounting other components on the back side of The board after MLCC has been mounted on the front side.  
 When the suction nozzle is placed too close to the board, board deflection stress may be applied to MLCC on the back side, resulting in cracks in MLCC.  
 Check if proper value is set on each chip mounter for a suction location, a mounting gap and a suction gap by the thickness of components.





## Caution/Notice

### III. Board mounting components with leads

If the board is bent when inserting components (transformer, IC, etc.) into it, MLCC or solder joint may be cracked. Pay attention to the following:

- Reduce the stress on the board during insertion by increasing the size of the lead insertion hole.
- Insert components with leads into the board after fixing the board with support pins or a dedicated jig.
- Support the bottom side of the board to avoid bending the board.
- Check the status of the height of each support pin regularly when the support pins are used.



Not recommended



Recommended

### IV. Socket and / or connector attach / detach

Since the insertion or removal from sockets and connectors may cause the board to bend, make sure that MLCC mounted on the board should not be damaged in this process.



### V. Fastening screw

When attaching a shield on a board, the board may be bent during a screw tightening work.

Pay attention to the following conditions before performing the work.

- Plan the work to prevent the board from bending.
- Use a torque driver to prevent over-tightening of the screw.
- Since the board may be bent by soldering, use caution in tightening the screw.



# Caution/Notice

## 11 Adhesive selection

Pay attention to the following if an adhesive is used to position MLCC on the board before soldering.

### I. Requirements for Adhesives

- They must have enough adhesive strength to prevent MLCC from slipping or moving during the handling the board.
- They must maintain their adhesive strength when exposed to soldering temperatures.
- They should not spread when applied to the PCB.
- They should have a long pot life.
- They should hardened quickly.
- They should not corrode the board or MLCC materials.
- They should be an insulator type that does not affect the characteristic of MLCC.
- They should be non-toxic, not harmful, and particularly safe when workers touch the adhesives.

### II. Caution before Applying Adhesive

Check the correct application conditions before attaching MLCC to the board with an adhesive.

If the dimension of land, the type of adhesives, the amount of coating, the contact surface areas, the curing temperature, or other conditions are not appropriate, it may degrade the MLCC performance.

### III. Cautions for selecting Adhesive

Depending on the type of the chosen adhesive, MLCC insulation resistance may be degraded.

In addition, MLCC may be cracked by the difference in contractile stress caused by the different contraction rate between MLCC and the adhesive.

### IV. Cautions for the amount of applied adhesive and curing temperature

- The inappropriate amount of the adhesive cause the weak adhesive strength, resulting in the mounting defect in MLCC.
- Excessive use of the adhesive may cause a soldering defect, loss of electrical connection, incorrect curing, or slippage of a mounting position, thereby an inflow of the adhesive onto the land section should be avoided.
- If the curing temperature is too high or the curing time is too long, the adhesive strength will be degraded. In addition, oxidation both on the outer termination (Sn) of MLCC and the surface of the board may deteriorate the solderability.

## 12 Flux

- I. The excessive amount of flux generates excessive flux gases which may deteriorate solderability. Therefore, apply the flux thin and evenly as a whole.
- II. Flux with a high ratio of halogen may oxidize the outer termination of MLCC, if cleaning is not done properly. Therefore, use flux with a halogen content of 0.1% max.
- III. Strong acidic flux can degrade the MLCC performance.
- IV. Check the solder quality of MLCC and the amount of remaining flux surrounding MLCC after the mounting process.



# Caution/Notice

## 13 Coating

### I. Crack caused by Coating

A crack may be caused in the MLCC due to amount of the resin and stress of thermal contraction of the resin during coating process.

During the coating process, the amount of resin and the stress of thermal contraction of the resin may cause cracks in MLCC. The difference of thermal expansion coefficient between the coating, or a molding resin may cause destruction, deterioration of insulation resistance or dielectric breakdown of MLCC such as cracks or detachment, etc.

### II. Recommended Coating material

- A thermal expansion coefficient should be as close to that of MLCC as possible.
- A silicone resin can be used as an under-coating to buffer the stress.
- The resin should have a minimum curing contraction rate.
- The resin should have a minimum sensitivity (ex. Epoxy resin).
- The insulation resistance of MLCC can be deteriorated if a high hygroscopic property resin is used in a high humidity condition.
- Do not use strong acid substances due to the fact that coating materials inducing a family of halogen substances and organic acid may corrode MLCC.

## Design

### 1 Circuit design

When the board is dropped or bent, MLCC mounted on the board may be short-circuited by the drop in insulation resistance. Therefore, it is required to install safety equipment such as a fuse to prevent additional accidents when MLCC is short-circuited, otherwise, electric short and fire may occur. This product is not a safety guaranteed product..

### 2 PCB Design

I. Unlike lead type components, SMD type components that are designed to be mounted directly on the board are fragile to the stress. In addition, they are more sensitive to mechanical and thermal stress than lead type components.

### II. MLCC crack by PCB material type

A great difference of the thermal expansion coefficient between PCB and MLCC causes thermal expansion and contraction, resulting in cracks in MLCC. Even though MLCC is mounted on a board with a fluorine resin or on a single-layered glass epoxy, cracks in MLCC may occur.

### 3 Design system evaluation

I. Evaluate the actual design with MLCC to make sure there is no functional issue or violation of specifications of the finished goods.

II. Please note that the capacitance may differ based on the operating condition of the actual system since Class 2 MLCC capacitance varies with applied voltage and temperature.

III. Surge resistance must be evaluated since the excessive surge caused by the inductance of the actual system may apply to MLCC.

IV. Note the actual MLCC size and the termination shape.

# Caution/Notice

## 4 Land dimension

The recommended land dimension is determined by evaluating the actual SET and a board.



## Reflow Footprint

| Chip Size (mm) | Chip Tol. (mm) | a (mm)    | b (mm)    | c (mm)      | (a+2b) min | (a+2b) max | Wmin  | Wmax  |
|----------------|----------------|-----------|-----------|-------------|------------|------------|-------|-------|
| 0201           | ± 0.013        | 0.07~0.08 | 0.09~0.14 | 0.125~0.135 | 0.25       | 0.36       | 0.125 | 0.135 |
|                | ± 0.03         | 0.07~0.09 | 0.10~0.15 | 0.135~0.145 | 0.27       | 0.39       | 0.135 | 0.145 |
| 0402           | ± 0.02         | 0.14~0.18 | 0.19~0.23 | 0.20~0.24   | 0.52       | 0.64       | 0.20  | 0.24  |
|                | ± 0.05         | 0.15~0.19 | 0.20~0.24 | 0.23~0.27   | 0.55       | 0.67       | 0.23  | 0.27  |
| 05025          | ± 0.025        | 0.18~0.22 | 0.24~0.28 | 0.25~0.29   | 0.66       | 0.78       | 0.25  | 0.29  |
| 0603           | ± 0.03         | 0.22~0.28 | 0.31~0.37 | 0.30~0.36   | 0.84       | 1.02       | 0.30  | 0.36  |
|                | ± 0.05         | 0.23~0.29 | 0.32~0.38 | 0.32~0.38   | 0.87       | 1.05       | 0.32  | 0.38  |
|                | ± 0.07         | 0.24~0.30 | 0.32~0.38 | 0.35~0.40   | 0.88       | 1.06       | 0.35  | 0.40  |
|                | ± 0.09         | 0.25~0.31 | 0.33~0.39 | 0.36~0.42   | 0.91       | 1.09       | 0.36  | 0.42  |
| 1005           | ± 0.05         | 0.36~0.44 | 0.49~0.57 | 0.51~0.59   | 1.34       | 1.58       | 0.51  | 0.59  |
|                | ± 0.07         | 0.37~0.45 | 0.49~0.57 | 0.53~0.61   | 1.35       | 1.59       | 0.53  | 0.61  |
|                | ± 0.10         | 0.38~0.46 | 0.50~0.58 | 0.56~0.64   | 1.38       | 1.62       | 0.56  | 0.64  |
|                | ± 0.15         | 0.40~0.48 | 0.52~0.60 | 0.61~0.69   | 1.44       | 1.68       | 0.61  | 0.69  |
|                | ± 0.20         | 0.42~0.50 | 0.53~0.61 | 0.66~0.74   | 1.48       | 1.72       | 0.66  | 0.74  |
|                | ± 0.25         | 0.44~0.52 | 0.55~0.63 | 0.71~0.79   | 1.54       | 1.78       | 0.71  | 0.79  |
|                | ± 0.30         | 0.45~0.53 | 0.56~0.64 | 0.76~0.84   | 1.57       | 1.81       | 0.76  | 0.84  |
|                | ± 0.40         | 0.49~0.57 | 0.59~0.67 | 0.86~0.94   | 1.67       | 1.91       | 0.86  | 0.94  |
| 1608           | ± 0.10         | 0.63~0.73 | 0.71~0.81 | 0.80~0.90   | 2.05       | 2.35       | 0.80  | 0.90  |
|                | ± 0.15         | 0.65~0.75 | 0.73~0.83 | 0.90~1.00   | 2.11       | 2.41       | 0.90  | 1.00  |
|                | ± 0.20         | 0.67~0.77 | 0.74~0.84 | 0.95~1.05   | 2.15       | 2.45       | 0.95  | 1.05  |
|                | ± 0.25         | 0.69~0.79 | 0.76~0.86 | 1.00~1.10   | 2.21       | 2.51       | 1.00  | 1.10  |
|                | ± 0.30         | 0.71~0.81 | 0.77~0.87 | 1.05~1.15   | 2.25       | 2.55       | 1.05  | 1.15  |
| 2012           | ± 0.10         | 0.79~0.89 | 0.88~0.98 | 1.25~1.35   | 2.55       | 2.85       | 1.25  | 1.35  |
|                | ± 0.15         | 0.81~0.91 | 0.90~1.00 | 1.30~1.40   | 2.61       | 2.91       | 1.30  | 1.40  |
|                | ± 0.20         | 0.83~0.93 | 0.91~1.01 | 1.35~1.45   | 2.65       | 2.95       | 1.35  | 1.45  |
|                | ± 0.25         | 0.85~0.95 | 0.93~1.03 | 1.40~1.50   | 2.71       | 3.01       | 1.40  | 1.50  |
|                | ± 0.30         | 0.89~0.97 | 0.94~1.04 | 1.45~1.55   | 2.75       | 3.05       | 1.45  | 1.55  |
| 3216           | ± 0.20         | 1.64~1.76 | 1.19~1.31 | 1.74~1.86   | 4.02       | 4.38       | 1.74  | 1.86  |
|                | ± 0.30         | 1.69~1.81 | 1.22~1.34 | 1.84~1.96   | 4.13       | 4.49       | 1.84  | 1.96  |
| 3225           | ± 0.20         | 1.64~1.76 | 1.29~1.41 | 2.64~2.76   | 4.22       | 4.58       | 2.64  | 2.76  |
|                | ± 0.30         | 1.69~1.81 | 1.32~1.44 | 2.74~2.86   | 4.33       | 4.69       | 2.74  | 2.86  |
| 4532           | ± 0.40         | 2.17~2.33 | 1.75~1.91 | 3.42~3.58   | 5.67       | 6.15       | 3.42  | 3.58  |
| 5750           | ± 0.40         | 2.75~2.95 | 2.03~2.23 | 5.30~5.50   | 6.81       | 7.41       | 5.30  | 5.50  |

# Caution/Notice

## Flow Footprint

| Chip Size (mm) | Chip Tol. (mm) | a (mm)    | b (mm)    | c (mm)    | (a+2b) min | (a+2b) max | Wmin | Wmax |
|----------------|----------------|-----------|-----------|-----------|------------|------------|------|------|
| 1005           | ± 0.05         | 0.55~0.65 | 0.70~0.80 | 0.55~0.65 | 1.95       | 2.25       | 0.55 | 0.65 |
|                | ± 0.07         | 0.55~0.65 | 0.70~0.80 | 0.55~0.65 | 1.95       | 2.25       | 0.55 | 0.65 |
|                | ± 0.10         | 0.55~0.65 | 0.70~0.80 | 0.60~0.70 | 1.95       | 2.25       | 0.60 | 0.70 |
|                | ± 0.15         | 0.55~0.65 | 0.70~0.80 | 0.60~0.70 | 1.95       | 2.25       | 0.60 | 0.70 |
|                | ± 0.20         | 0.60~0.70 | 0.70~0.80 | 0.65~0.75 | 2.00       | 2.30       | 0.65 | 0.75 |
|                | ± 0.25         | 0.60~0.70 | 0.70~0.80 | 0.65~0.75 | 2.00       | 2.30       | 0.65 | 0.75 |
| 1608           | ± 0.10         | 0.90~1.00 | 0.80~0.90 | 0.90~1.00 | 2.50       | 2.80       | 0.90 | 1.00 |
|                | ± 0.15         | 0.90~1.00 | 0.85~0.95 | 0.90~1.00 | 2.60       | 2.90       | 0.90 | 1.00 |
|                | ± 0.20         | 0.90~1.00 | 0.85~0.95 | 0.95~1.05 | 2.60       | 2.90       | 0.95 | 1.05 |
|                | ± 0.25         | 0.95~1.05 | 0.85~0.95 | 0.95~1.05 | 2.65       | 2.95       | 0.95 | 1.05 |
|                | ± 0.30         | 0.95~1.05 | 0.85~0.95 | 1.00~1.10 | 2.65       | 2.95       | 1.00 | 1.10 |
| 2012           | ± 0.10         | 1.00~1.10 | 1.05~1.15 | 1.30~1.40 | 3.10       | 3.40       | 1.30 | 1.40 |
|                | ± 0.15         | 1.05~1.15 | 1.05~1.15 | 1.30~1.40 | 3.15       | 3.45       | 1.30 | 1.40 |
|                | ± 0.20         | 1.05~1.15 | 1.05~1.15 | 1.35~1.45 | 3.15       | 3.45       | 1.35 | 1.45 |
|                | ± 0.25         | 1.05~1.15 | 1.10~1.20 | 1.35~1.45 | 3.25       | 3.55       | 1.35 | 1.45 |
|                | ± 0.30         | 1.05~1.15 | 1.10~1.20 | 1.40~1.50 | 3.25       | 3.55       | 1.40 | 1.50 |
|                | ± 0.35         | 1.05~1.15 | 1.10~1.20 | 1.40~1.50 | 3.25       | 3.55       | 1.40 | 1.50 |
| 3216           | ± 0.15         | 2.00~2.10 | 1.40~1.50 | 1.70~1.80 | 4.80       | 5.10       | 1.70 | 1.80 |
|                | ± 0.20         | 2.00~2.10 | 1.40~1.50 | 1.75~1.85 | 4.80       | 5.10       | 1.75 | 1.85 |
|                | ± 0.30         | 2.05~2.15 | 1.40~1.50 | 1.80~1.90 | 4.85       | 5.15       | 1.80 | 1.90 |
| 3225           | ± 0.30         | 1.90~2.00 | 1.55~1.65 | 2.70~2.80 | 5.00       | 5.30       | 2.70 | 2.80 |
|                | ± 0.40         | 1.95~2.05 | 1.55~1.65 | 2.75~2.85 | 5.05       | 5.35       | 2.75 | 2.85 |

## Others

### I Storage environment

#### I. Recommendation for temperature/humidity

Even taping and packaging materials are designed to endure a long-term storage, they should be stored with a temperature of 0~40°C and an RH of 0~70% otherwise, too high temperatures or humidity may deteriorate the quality of the product rapidly.

As oxidization is accelerated when relative humidity is above 70%RH, the lower the humidity is, the better the solderability is. As the temperature difference may cause dew condensation during the storage of the product, it is a must to maintain a temperature control environment.

#### II. Shelf Life

An allowable storage period should be within 6 months from the outgoing date of delivery in consideration of solderability. As for products in storage over 6 months, please check solderability before use.

### 2 Caution for corrosive environment

As corrosive gases may deteriorate the solderability of MLCC outer termination, it is a must to store MLCC in an environment without gases. MLCC that is exposed to corrosive gases may cause its quality issues due to the corrosion of plating layers and the penetration of moisture.



# Caution/Notice

## 3 Equipment in operation

- I. Do not touch MLCC directly with bare hands to prevent an electric shock or damage.
- II. The termination of MLCC shall not be contacted with a conductive object (short -circuit). Do not expose MLCC to conductive liquid containing acidic or alkaline material.
- III. Do not use the equipment in the following conditions.
  - (1) Exposure to water or oil
  - (2) Exposure to direct sunlight
  - (3) Exposure to Ozone or ultra-violet radiation.
  - (4) Exposure to corrosive gas (e.g. hydrogen sulfide, sulfur dioxide, chlorine, ammonia gas)
  - (5) Exposure to vibration or mechanical shock exceeding specified limit
  - (6) Exposure to high humidity
- IV. If the equipment starts generating any smoke, fire or smell, immediately switch it off or unplug from the power source.  
If the equipment is not switched off or unplugged, serious damage may occur due to the continuous power supply. Please be careful with the high temperature in this condition.

## 4 Waste treatment

In case of scrapping MLCC, it is incinerated or buried by a licensed industrial waste company. When scrapping MLCC, it is recommended to incinerate or bury the scrappage by a licensed industrial waste company.

## 5 Operating temperature

The operating temperature limit is determined by the specification of each models.

- I. Do not use MLCC over the maximum operating temperature.  
Pay attention to equipment's temperature distribution and the seasonal fluctuation of ambient temperature.
- II. The surface temperature of MLCC cannot exceed the maximum operating temperature including self-heating effects.

## 6 Transportation

The performance of MLCC may be affected by transportation conditions.

- I. MLCC shall be protected from excessive temperature, humidity and a mechanical force during transportation.  
During transportation, the cartons shall not be deformed and the inner packaging shall be protected from excessive external forces.
- II. Do not apply excessive vibrations, shocks or excessive forces to MLCC.
  - If excessive mechanical shock or stress are applied, MLCC's ceramic body may crack.
  - When the surface of MLCC is hit with the sharp edge of an air driver, a soldering iron, or a tweezer, etc, MLCC may crack or become short-circuited.
- III. MLCC may crack and become non-functional due to the excessive shocks or dropping during transportation.

## 7 Notice

Some special products are excluded from this document.

Please be advised that this is a standard product specification for a reference only.

We may change, modify or discontinue the product specifications without notice at any time.

So, you need to approve the product specifications before placing an order.

Should you have any question regarding the product specifications, please contact our sales personnel or application engineers.



# Disclaimer & Limitation of Use and Applications

## 1 Disclaimer

All product specifications, statements, information and data (collectively, the "Information") in this spec sheet or made available on the website are subject to change.

The customer is responsible for checking and verifying the extent to which the Information contained in this publication is applicable to an order at the time the order is placed.

All Information given herein is believed to be accurate and reliable, but it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

ANY USE OF PRODUCT OUTSIDE OF SPECIFICATIONS OR ANY STORAGE OR INSTALLATION INCONSISTENT WITH PRODUCT GUIDANCE VOIDS ANY WARRANTY.

Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies)

in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage.

Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated or that other measures may not be required.

## 2 Limitation

Please contact us with usage environment information such as voltage, current, temperature, or other special conditions before using our products for the applications listed below. The below application conditions require especially high reliability products to prevent defects that may directly cause damages or loss to third party's life, body or property.

If you have any questions regarding this 'Limitation', you should first contact our sales personnel or application engineers.

- ① Aerospace/Aviation equipment 1wheeler, 2wheeler and 3wheeler vehicle
- ② Automotive of Transportation equipment
- ③ Military equipment
- ④ Atomic energy-related equipment
- ⑤ Undersea equipment
- ⑥ Medical equipment
- ⑦ Disaster prevention/crime prevention equipment
- ⑧ Power plant control equipment
- ⑨ Traffic signal equipment
- ⑩ Data-processing equipment
- ⑪ Electric heating apparatus, burning equipment
- ⑫ Safety equipment
- ⑬ Any other applications with the same as or similar complexity or reliability to the applications



# Component Sales Offices

## Head Office

150, Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, Republic of Korea  
**Tel** +82-31-210-5114 (Main Number)

## America

### San Jose

Samsung Electro Mechanics America Inc. (HQ)  
3655 N 1st street, San Jose CA 95134, U.S.A.  
**Tel** +1-408-544-5454

### San Diego

Samsung Electro Mechanics America Inc. (San Diego office)  
5405 Morehouse Drive, Suite #220 San Diego CA 92121 USA  
**Tel** +1-858-766-9863

### Phoenix

Samsung Electro Mechanics America Inc. (Phoenix Office)  
4505 E Chandler Blvd suite #105, Phoenix, AZ, 85048, U.S.A.  
**Tel** +1-480-592-0184

### Detroit

Samsung Electro Mechanics America Inc. (Detroit Office)  
27777 Franklin Road Suite 1040 Southfield, MI 48034 USA  
**Tel** +1-248-499-8830

### Austin

Samsung Electro Mechanics America Inc. (Austin Office)  
710 Hesters Crossing Road Suite 180 Round Rock, TX 78681 USA  
**Tel** +1-480-216-4432

## Europe

### Frankfurt

Samsung Electro-Mechanics GmbH. (HQ)  
Koelner Str. 12, 65760 Eschborn, Germany.  
**Tel** +49-6196-66-3300

### Munich

Samsung Electro-Mechanics GmbH. (Munich Office)  
Reichenbachstrasse 2, 85737 Ismaning, Germany.  
**Tel** +49-6196-66-7237

### Stuttgart

Samsung Electro-Mechanics GmbH. (Stuttgart Office)  
Leitzstrasse 45, 70469 Stuttgart, Germany.  
**Tel** +49-7114-906-6281

### Helsinki

Samsung Electro-Mechanics GmbH. (Helsinki Office)  
Keilaranta 1, 02150 Espoo, Finland.  
**Tel** +35-898-53-1132

## Asia

### Shenzhen

Samsung Electro-Mechanics (ShenZhen) Co.,Ltd.(HQ)  
14F, Tower A, SCC Building, Junction of Houhai Blvd. and Haide 1st Rd., Nanshan Dist., Shenzhen City, China.  
**Tel** +86-755-8608-5589

### Shanghai

Samsung Electro-Mechanics Co.,Ltd. (Shanghai Branch)  
13F Room 1301-1302, Tower B, SOHO Zhongshan Building, No.1065 Zhongshan West Rd., Changning Dist., Shanghai City, China.  
**Tel** +86-21-2501-5803

### Beijing

Samsung Electro-Mechanics Co.,Ltd. (Beijing Branch)  
21F 2101-3, Samsung Tower, Building 1, Yard31, Jinghui Street, Chaoyang Dist, Beijing City, China.  
**Tel** +86-10-5092-8701

### Taipei

Samsung Electro-Mechanics Co.,Ltd. (Taipei Branch)  
9F-1, No.399 Rueykuang Rd., Neihu Dist., Taipei City, Taiwan.  
**Tel** +886-2-2656-8351

### Singapore

Samsung Electro-Mechanics Private Limited(HQ)  
3 Church Street Samsung Hub #23-01 Singapore.  
**Tel** +65-6933-2600

### Penang

Samsung Electro-Mechanics Private Limited(Penang Office)  
Unit 9-06, Menara Boustead, 39 Jalan Sultan Ahmad Shah, 10050, Georgetown, Penang, Malaysia.  
**Tel** +60-12-803-7001

### New Delhi

Samsung Electro-Mechanics Private Limited(New Delhi Office)  
Unit No. 606, DLF Tower A, District Center Jasola, New Delhi-110025, India  
**Tel** +91-956-005-0310

### Tokyo

Samsung Electro-Mechanics Japan Co., Ltd(HQ)  
Shinagawa Grand Central Tower 9F, 2-16-4, Kounan, Minato-ku, Tokyo, Japan.  
**Tel** +81-3-6369-6461

# Manufacturing Sites

### Busan Plant

333, Noksansaneopjung-ro, Gangseo-gu,  
Busan, Republic of Korea  
**Tel** +82-31-210-5114 (Main Number)

### China Tianjin

No.80&96, Xiqing Road, The west zone of  
TEDA Tianjin, China 300462  
**Tel** +86-22-6686-3333

### Philippines

BLK 5&6 Calamba Premiere International Park  
Brgy. Batino Calamba, Laguna Philippines  
**Tel** +63-49-508-8300

\* Suwon (R&D)

**SAMSUNG  
ELECTRO-MECHANICS**



## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View CL32B475KCVZW6E on WIN SOURCE](#)
- ⊖ [Samsung Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management