




**THE DATASHEET OF
AK3-150C**



AK3 Series

Axial Leaded – 3kA

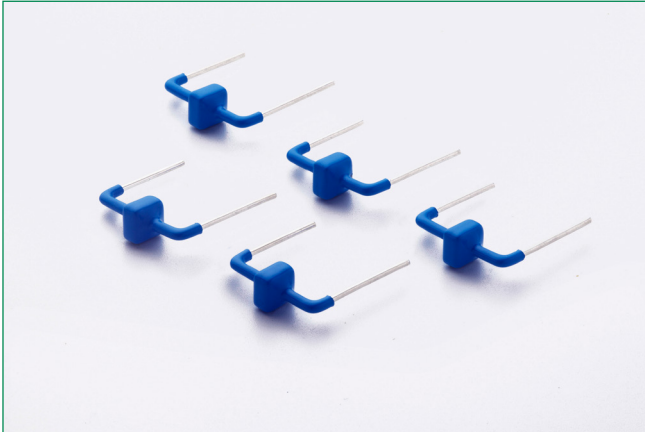

Additional Information



Resources



Accessories



Samples

Maximum Ratings and Thermal Characteristics

($T_A=25^\circ\text{C}$ unless otherwise noted)

| Parameter | Symbol | Value | Unit |
|--------------------------------------|-----------|------------|------------------|
| Operating Storage Temperature Range | T_{STG} | -55 to 150 | $^\circ\text{C}$ |
| Operating Junction Temperature Range | T_J | -55 to 125 | $^\circ\text{C}$ |
| Current Rating ¹ | I_{PP} | 3 | kA |

Note:

1. Rated I_{PP} measured with 8/20 μs pulse.

Description

The AK3 series of high power TVS diode is specially designed for meeting severe surge test environment of both AC and DC line protection applications. It features a very fast response and ultra low clamping characteristics over traditional metal oxide varistor (MOV) solutions. They can be connected in series and / or parallel to create a very high surge current protection solution.


Features & Benefits

- Very low clamping voltage
- Ultra compact: less than one-tenth the size of traditional solutions
- Sharp breakdown voltage
- Low slope resistance
- Bi-directional
- Foldbak™ technology for superior clamping factor
- Symmetric in leads width for easier soldering during assembly.
- IEC 61000-4-2 ESD 15kV(Air), 8kV (Contact)
- ESD protection of data lines in accordance with IEC 61000-4-2
- EFT protection of data lines in accordance with IEC 61000-4-4
- Halogen-free
- RoHS compliant
- Glass passivated junction
- Pb-free E4 means 2nd level interconnect is Pb-free and the terminal finish material is Silver

Agency Approvals

| Agency | Agency File Number |
|--------|--------------------|
| | E128662 |

Functional Diagram



Electrical Characteristics ($T_A=25^\circ\text{C}$ unless otherwise noted)

| Part Numbers | Part Marking | Standoff Voltage (V_{SO}) Volts | Max. Reverse Leakage (I_R) @ V_{SO} μA | Typical I_R @ 85°C (μA) | Reverse Breakdown Voltage (V_{BR}) @ I_T | | Test Current I_T | Max. Clamping Voltage V_{CL} @ I_{PB} Peak Pulse Current (I_{PP}) (Note 1) | | Max. Temp Coefficient OF V_{BR} | Max. Capacitance 0 Bias 10kHz | Agency Approval |
|--------------|--------------|-------------------------------------|---|--|--|-----------|--------------------|--|----------------|-----------------------------------|-------------------------------|-----------------|
| | | | | | Min Volts | Max Volts | | (mA) | V_{CL} Volts | | | |
| AK3 - 015C | 3 - 015C | 15 | 10 | 15 | 16 | 19 | 10 | 28 | 3,000 | 0.1 | 12.0 | X |
| AK3 - 030C | 3 - 030C | 30 | 10 | 15 | 32 | 37 | 10 | 90 | 3,000 | 0.1 | 11.0 | X |
| AK3 - 038C | 3 - 038C | 38 | 10 | 15 | 40 | 46 | 10 | 95 | 3,000 | 0.1 | 10.0 | - |
| AK3 - 058C | 3 - 058C | 58 | 10 | 15 | 64 | 70 | 10 | 110 | 3,000 | 0.1 | 6.0 | X |
| AK3 - 066C | 3 - 066C | 66 | 10 | 15 | 72 | 80 | 10 | 120 | 3,000 | 0.1 | 6.0 | X |
| AK3 - 076C | 3 - 076C | 76 | 10 | 15 | 85 | 95 | 10 | 140 | 3,000 | 0.1 | 6.0 | X |
| AK3 - 150C | 3 - 150C | 150 | 10 | 15 | 158 | 194 | 10 | 230 | 3,000 | 0.1 | 2.6 | X |
| AK3 - 170C | 3 - 170C | 170 | 10 | 15 | 179 | 220 | 10 | 260 | 3,000 | 0.1 | 2.4 | X |
| AK3 - 190C | 3 - 190C | 190 | 10 | 15 | 200 | 245 | 10 | 290 | 3,000 | 0.1 | 2.4 | X |
| AK3 - 208C | 3 - 208C | 208 | 10 | 15 | 223 | 246 | 10 | 306 | 3,000 | 0.1 | 2.4 | X |
| AK3 - 380C | 3 - 380C | 380 | 10 | 15 | 401 | 443 | 10 | 520 | 3,000 | 0.1 | 2.0 | X |
| AK3 - 430C | 3 - 430C | 430 | 10 | 15 | 440 | 490 | 10 | 625 | 3,000 | 0.1 | 2.0 | X |

Note: 1. Using 8/20 μs wave shape as defined in IEC 61000-4-5.

AK3 Series

Axial Leaded – 3kA

Physical Specifications

| | |
|-----------------|---|
| Weight | Contact manufacturer |
| Case | Epoxy encapsulated |
| Terminal | Silver plated leads, solderable per MIL-STD-750 Method 2026 |

Flow/Wave Soldering (Solder Dipping)

| | |
|---------------------------|------------|
| Peak Temperature : | 265°C |
| Dipping Time : | 10 seconds |
| Soldering : | 1 time |

Wave Solder Profile

Figure 1:
Non Lead-free Profile


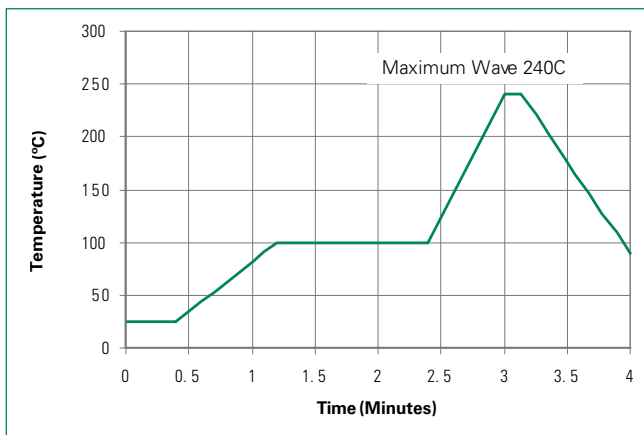


Figure 2:
Lead-free Profile

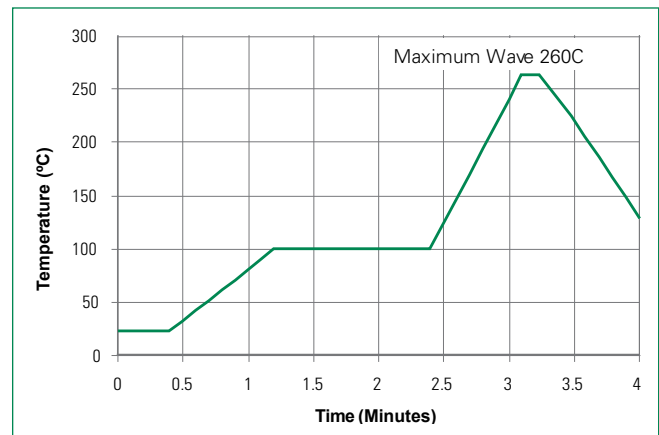

Ratings and Characteristic Curves ($T_A=25^\circ\text{C}$ unless otherwise noted)

Figure 3:
Peak Power Derating


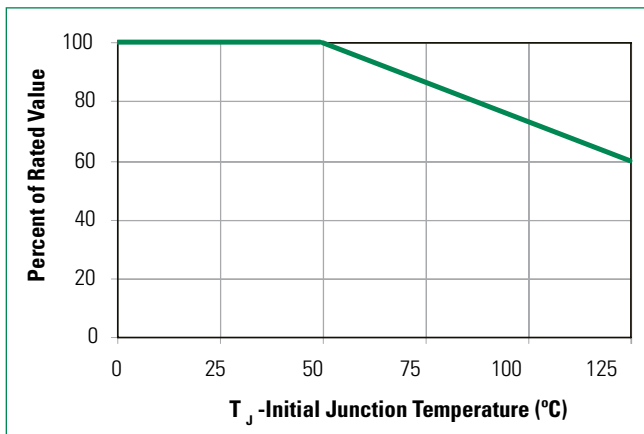


Figure 4:
Surge Response

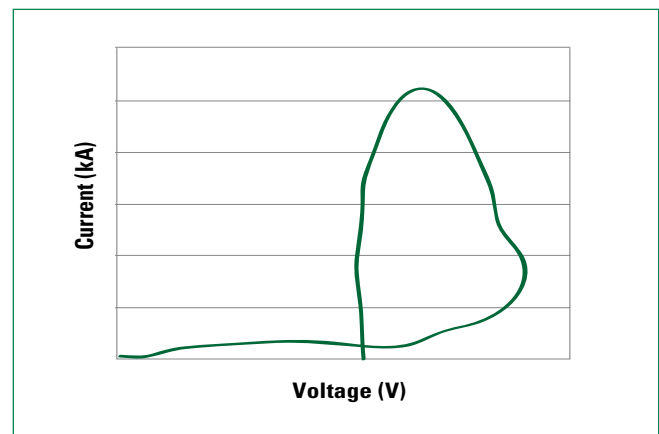

AK3 Series

Axial Leaded – 3kA

Ratings and Characteristic Curves ($T_A=25^\circ\text{C}$ unless otherwise noted) (Continued)

Figure 5:
Typical Peak Pulse Power Rating Curve

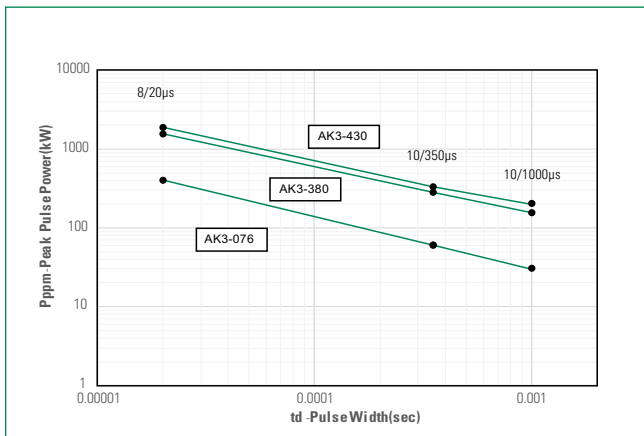


Figure 6:
Typical V_{BR} Vs Junction Temperature

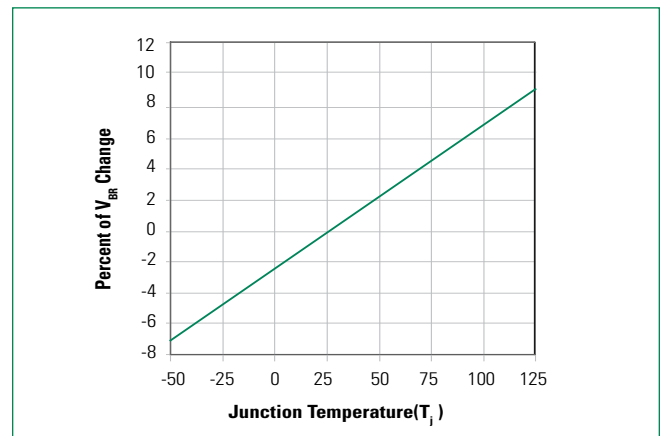


Figure 7:
Surge Response (8/20 Surge current waveform)


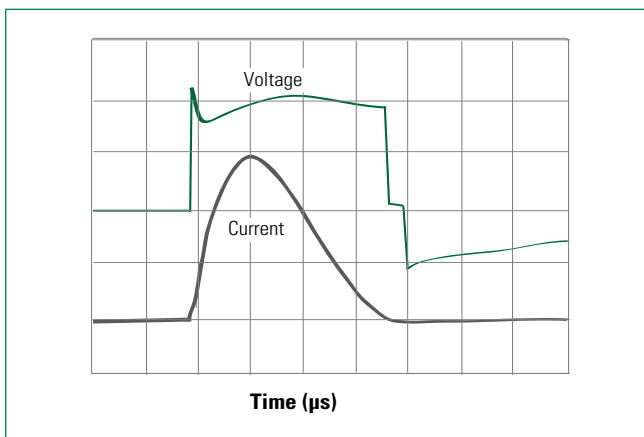


Figure 8:
Pulse Waveform

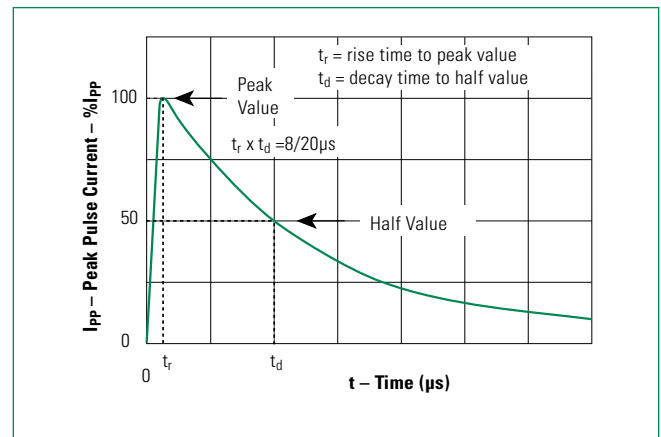


Note: The power dissipation causes a change in avalanche voltage during the surge and the avalanche voltage eventually returns to the original value when the transient has passed.

AK3 Series

Axial Leaded – 3kA


Part Marking System

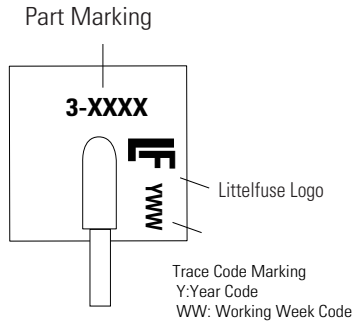

Apply to P/N listed below:

AK3-015C
AK3-030C
AK3-038C
AK3-058C
AK3-066C
AK3-076C

Type 1- Side View

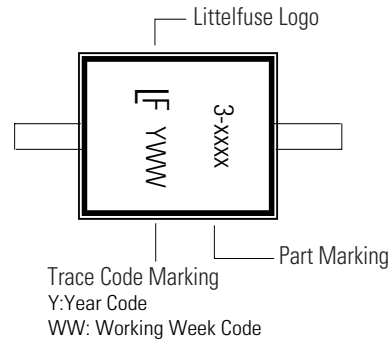


Apply to P/N listed below:

AK3-150C
AK3-170C
AK3-190C
AK3-208C
AK3-380C
AK3-430C

Type 2 - Top View


Part Numbering System

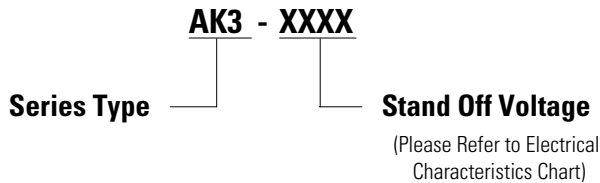

Packing Options

| Part Number | Component Package | Quantity | Packaging Option |
|-------------|-------------------|-----------|------------------|
| AK3-XXXX | AK Package | 56pcs/Box | Bulk |
| AK3-XXXX-12 | AK Package | 12pcs/Box | Bulk |

Dimensions

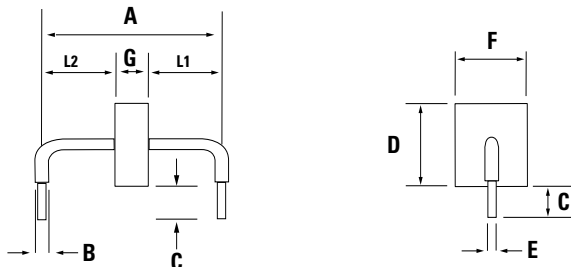



| Dimensions | Inches | Millimeters |
|------------|-----------------------|---|
| A | 0.951 +/- 0.040 | 24.15 +/- 1.00 |
| B | 0.094 +/- 0.024 | 2.40 +/- 0.60 |
| C | 0.236 +/- 0.039 | 6.00 +/- 1.00 |
| C | -208C 0.145 +/- 0.040 | 3.68 +/- 1.00 |
| D | 0.433 max. | 11.0 max. |
| E | 0.050 +/- 0.002 | 1.27 +/- 0.05 |
| F | 0.374 max. | 9.50 max. |
| G | -015C | 0.093 +/- 0.039 |
| | -030C/-038C/-066C | 0.130 +/- 0.047 |
| | -058C/-076C | 0.168 +/- 0.047 |
| | -150C | 0.383 +/- 0.047 |
| | -170C/-190C | 0.420 +/- 0.047 |
| | -208C | 0.358 +/- 0.047 |
| | -380C | 0.547 +/- 0.047 |
| L1 | -430C | 0.583 +/- 0.047 |
| | -208C | 0.296 +/- 0.047 |
| L2 | -208C | L1 = L2 tolerance +/- 0.047 inch (+/- 1.20 mm) = A - (G+L1) tolerance +/- 0.047 inch (+/- 1.20 mm) |
| | -208C | L1 = L2 tolerance +/- 0.047 inch (+/- 1.20 mm) |

Disclaimer Notice - Littelfuse products are not designed for, and shall not be used for, any purpose (including, without limitation, automotive, military, aerospace, medical, life-saving, life-sustaining or nuclear facility applications, devices intended for surgical implant into the body, or any other application in which the failure or lack of desired operation of the product may result in personal injury, death, or property damage) other than those expressly set forth in applicable Littelfuse product documentation. Warranties granted by Littelfuse shall be deemed void for products used for any purpose not expressly set forth in applicable Littelfuse documentation. Littelfuse shall not be liable for any claims or damages arising out of products used in applications not expressly intended by Littelfuse as set forth in applicable Littelfuse documentation. The sale and use of Littelfuse products is subject to Littelfuse Terms and Conditions of Sale, unless otherwise agreed by Littelfuse. "Littelfuse" includes Littelfuse, Inc., and all of its affiliate entities. <http://www.littelfuse.com/disclaimer-electronics>

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View AK3-150C on WIN SOURCE](#)
-  [Littelfuse Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management