



**THE DATASHEET OF
AE8600NS2211**





Electrical specifications

Notch Frequency: 8350 – 8850 MHz
Notch Rejection: 60 dB Min
Low-side Passband: 30-7325 MHz
High-side Passband: 9875-18000 MHz
Insertion Loss: 3.0 dB Max
VSWR: 1.8
Impedance: 50 Ω
Power Handling: 20W (CW), 100W (peak)

Size Tolerance: As Below (+/- 0.3m)

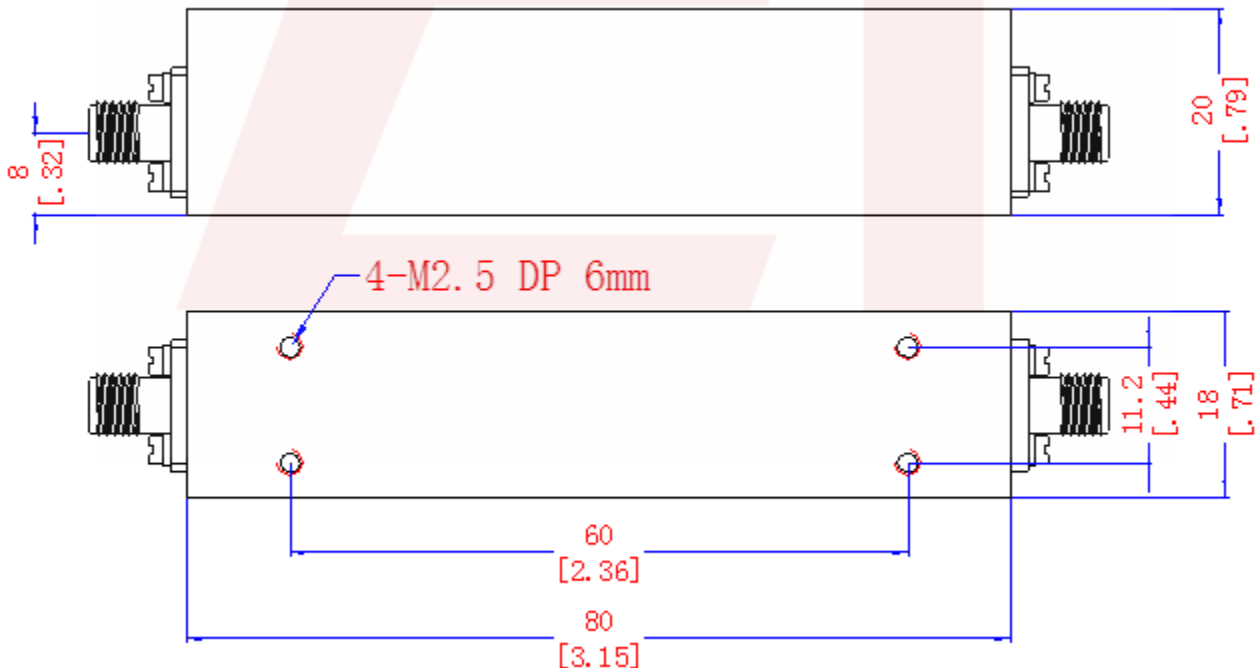
Mechanical

Connector Type: SMA Female
Mounting: threaded Hole
Dimensions: 3.15 x 0.71 x 0.79 in

Environmental



Operating Temperature: -20 to +60° C
Storage Temperature: -55 to +95° C

Outline Drawing:









Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View AE8600NS2211 on WIN SOURCE](#)
-  [Anatech Electronics Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management