



**THE DATASHEET OF
BDL-107-T-E**





(2.54 mm) .100"

BBS, BBL, BHS, BBD, BDL SERIES

MACHINED BOARD STACKING STRIPS

Mates with:

SS, SD, HSS, SL, SDL, ESS, ESD

FEATURES

- Low profile design achieves (3.89 mm) .153" board spacings when mated with SL Series.
- Approach the reliability of a permanent connection with the flexibility of a separable connection.

SPECIFICATIONS

For complete specifications see www.samtec.com?BBS, www.samtec.com?BBL, www.samtec.com?BHS, www.samtec.com?BBD or www.samtec.com?BDL

Insulator Material:
Black Liquid Crystal Polymer (BBL, BHS)
Black Glass Filled Polyester (BBS, BBD, BDL)

Temperature Range:
-55 °C to +125 °C

Terminal Material:
Phosphor Bronze or Brass

Plating:

Au or Sn over
50 μ" (1.27 μm) Ni

Lead-Free Solderable:



Yes (BBL, BDL, BHS-S)
No, Lead Wave only (BBS, BBD, BHS-N)

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality



Note:
Some lengths, styles and options are non-standard, non-returnable.

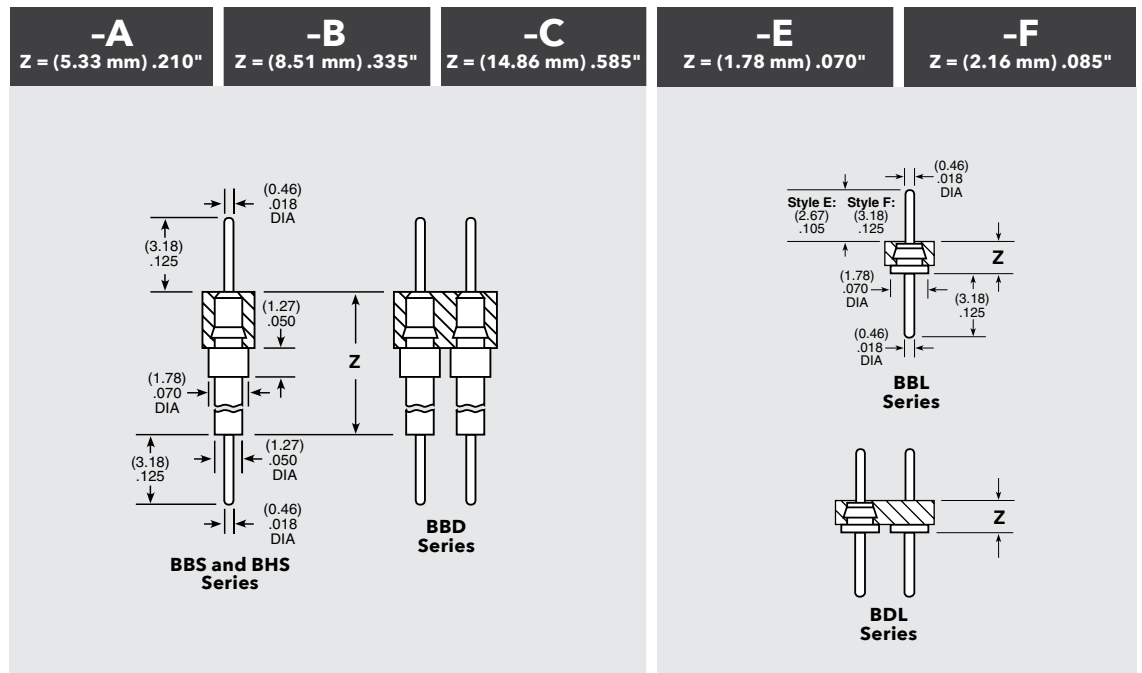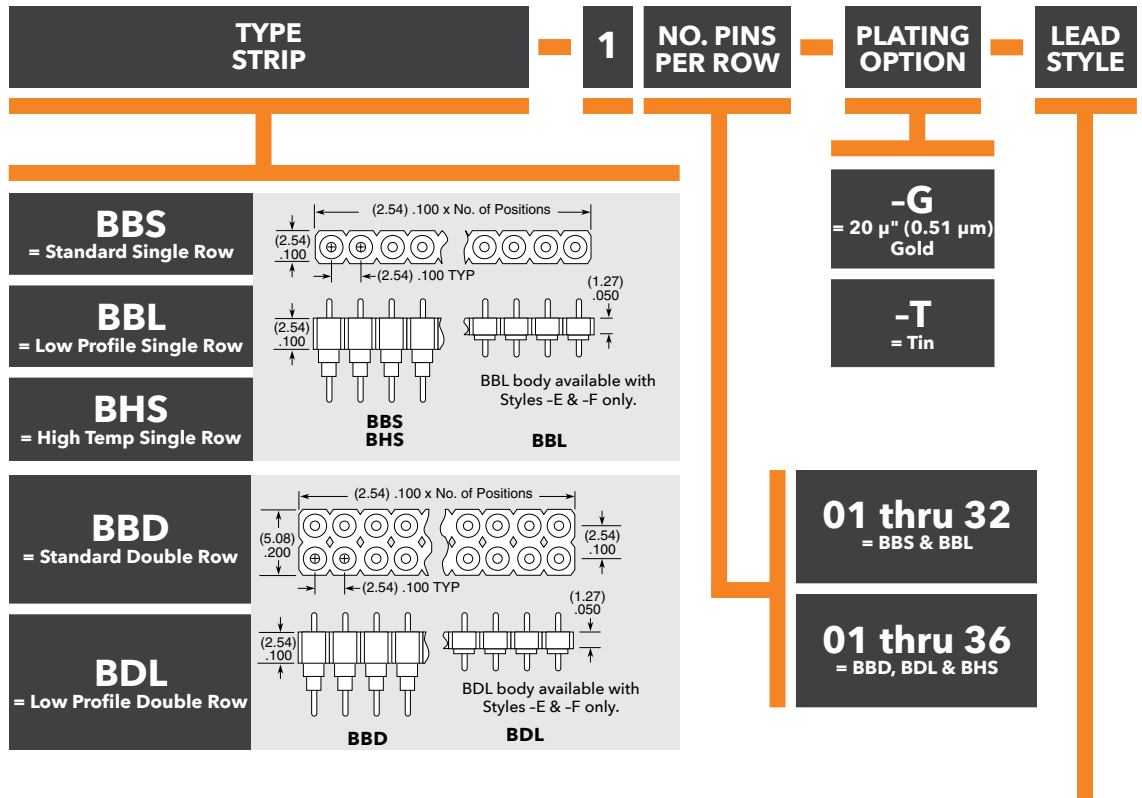

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View BDL-107-T-E on WIN SOURCE](#)

 [Samtec Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management