



THE DATASHEET OF CD3821A



- 1N3821A THRU 1N3828A AVAILABLE IN JANHC
- PER MIL-PRF-19500/115
- 1 WATT CAPABILITY WITH PROPER HEAT SINKING
- ALL JUNCTIONS COMPLETELY PROTECTED WITH SILICON DIOXIDE
- COMPATIBLE WITH ALL WIRE BONDING AND DIE ATTACH TECHNIQUES, WITH THE EXCEPTION OF SOLDER REFLOW

CD3821
thru
CD3828A

MAXIMUM RATINGS

Operating Temperature: -65°C to +175°C
Storage Temperature: -65°C to +175°C
Forward Voltage @ 200mA: 1.2 volts maximum


ELECTRICAL CHARACTERISTICS @ 25°C

CDI TYPE NUMBER (NOTE 1)	NOMINAL ZENER VOLTAGE $V_Z @ I_{ZT}$ (NOTE 2)	ZENER TEST CURRENT I_{ZT}	MAXIMUM ZENER IMPEDANCE		MAX. DC ZENER CURRENT I_{ZM}	MAX. REVERSE LEAKAGE CURRENT $I_R @ V_R$	
			$Z_{ZT} @ I_{ZT}$	$Z_{ZK} @ I_{ZK}=1mA$ (NOTE 3)		μA	VOLTS
CD3821	3.3	76	10	400	276	100	1
CD3821A	3.3	76	10	400	276	100	1
CD3822	3.6	69	10	400	252	75	1
CD3822A	3.6	69	10	400	252	75	1
CD3823	3.9	64	9	400	238	25	1
CD3823A	3.9	64	9	400	238	25	1
CD3824	4.3	58	9	400	213	5	1
CD3824A	4.3	58	9	400	213	5	1
CD3825	4.7	53	8	500	194	5	1
CD3825A	4.7	53	8	500	194	5	1
CD3826	5.1	49	7	550	178	3	1
CD3826A	5.1	49	7	550	178	3	1
CD3827	5.6	45	5	600	162	3	2
CD3827A	5.6	45	5	600	162	3	2
CD3828	6.2	41	2	700	146	3	3
CD3828A	6.2	41	2	700	146	3	3

NOTE 1 Zener voltage range equals nominal voltage $\pm 5\%$ for "A" Suffix No Suffix denotes $\pm 10\%$. "C" suffix denotes $\pm 2\%$, "D" suffix denotes $\pm 1\%$.

NOTE 2 Zener voltage is read using a pulse measurement, 10 milliseconds maximum.

NOTE 3 Zener impedance is derived by superimposing on I_{ZT} A 60Hz rms a.c. current equal to 10% of I_{ZT} .

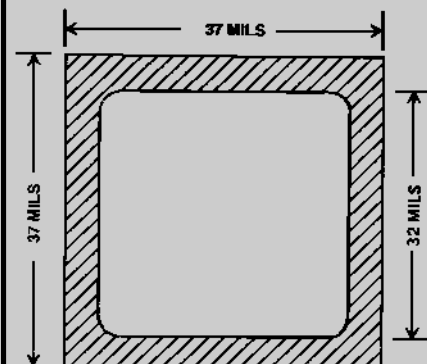

Backside is Cathode

FIGURE 1

DESIGN DATA

METALLIZATION:

Top: (Anode).....Al
Back: (Cathode).....Au

AL THICKNESS.....25,000 Å Min

GOLD THICKNESS.....4,000 Å Min

CHIP THICKNESS.....10 Mils

CIRCUIT LAYOUT DATA:

For Zener operation, cathode must be operated positive with respect to anode.

TOLERANCES: ALL

Dimensions ± 2 mils



CD3821A thru CD3828A

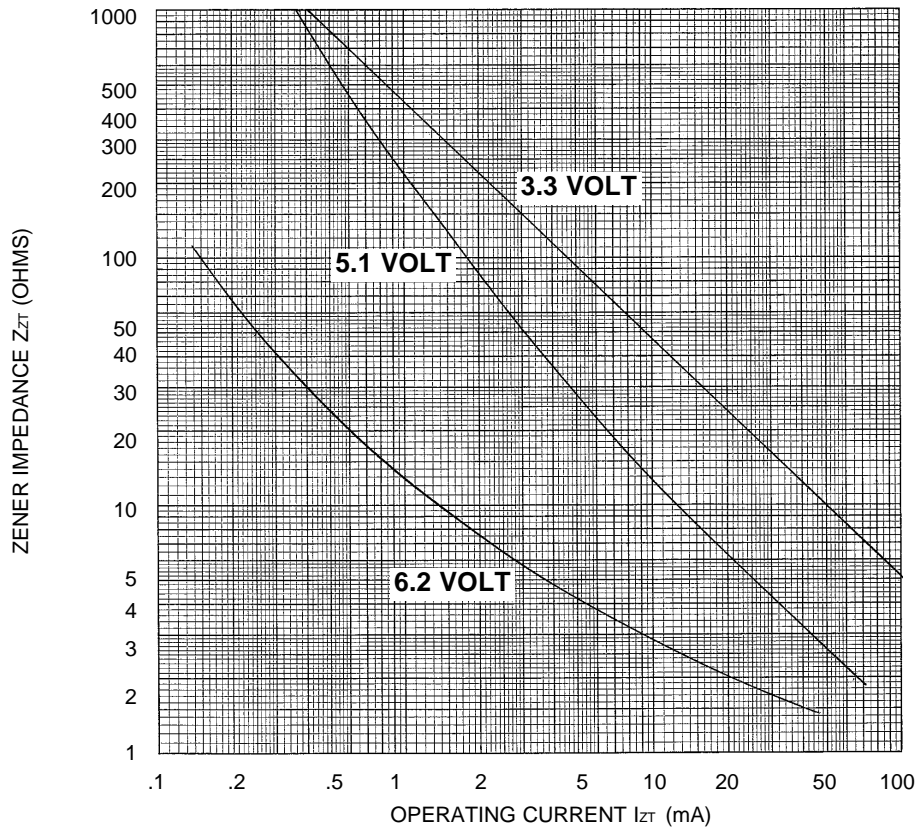


FIGURE 3

ZENER IMPEDANCE VS. OPERATING CURRENT

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View CD3821A on WIN SOURCE](#)
- ⊖ [Microchip Technology](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management