



**THE DATASHEET OF  
MGV2520101R0M-10**





# MGV2520101ROM-10


## PHYSICAL DIMENSIONS:

A	2.50	±	0.20
B	2.00	±	0.20
C	1.00		Max.
D	0.60	±	0.30

## LAND PATTERNS FOR REFLOW SOLDERING

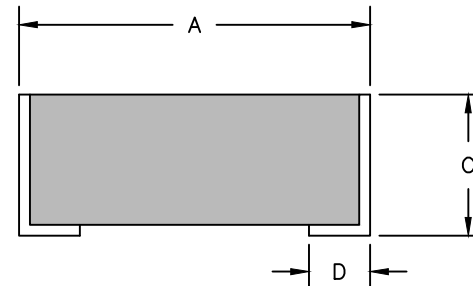

**RoHS**

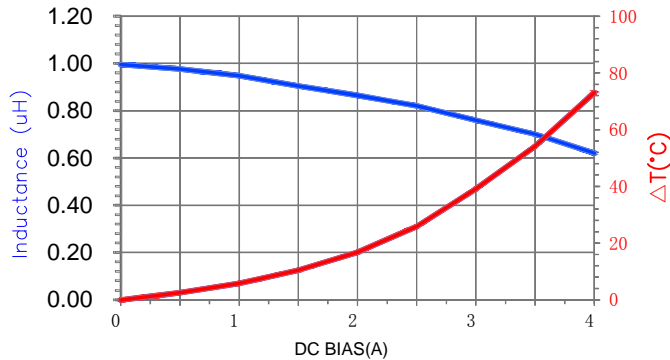

## ELECTRICAL SPECIFICATION @ 25°C

	Min	Norm	Max
INDUCTANCE (uH) L @ 1MHz/1mA ±20%	0.80	1.00	1.20
DCR (Ω)		0.045	0.054
Saturation Current Isat (A)		3.50	3.15
Heating Current Irms (A)		3.00	2.70

## NOTES:

1. OPERATING TEMPERATURE RANGE:  $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$  .
2. STORAGE TEMPERATURE RANGE:  $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$  .
3. Isat MEANS THAT MAX DC CURRENT WILL CAUSE APPROXIMATELY 30% INDUCTANCE REDUCTION FROM INITIAL VALUE.
4. Irms MEANS THAT MAX DC CURRENT WILL CAUSE COIL TEMPERATURE RISE APPROXIMATELY  $40^{\circ}\text{C}$  AT AMBIENT  $25 \pm 5^{\circ}\text{C}$ .

DIMENSIONS ARE IN mm.				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.		<b>Laird</b>	
PROJECT/PART NUMBER:				REV	PART TYPE:	DRAWN BY:	
MGV2520101ROM-10				A	CHOKE INDUCTOR	QIU	
DATE: 09/20/17				SCALE:	NTS	SHEET:	
A	NEW RELEASE	09/20/17	QIU	CAD #	TOOL #	1 of 1	
REV	DESCRIPTION	DATE	INT	MGV2520101ROM-10-A			

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View MGV2520101R0M-10 on WIN SOURCE](#)
- ⊖ [Laird-Signal Integrity Products Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management