



THE DATASHEET OF BYW99P-200






HIGH EFFICIENCY FAST RECOVERY RECTIFIER DIODES

FEATURES

- SUITED FOR SMPS
- VERY LOW FORWARD LOSSES
- NEGLIGIBLE SWITCHING LOSSES
- HIGH SURGE CURRENT CAPABILITY
- HIGH AVALANCHE ENERGY CAPABILITY
- INSULATED VERSION TOP3I :
Insulating voltage = 2500 V DC
Capacitance = 12 pF

DESCRIPTION

Dual center tap rectifier suited for switchmode power supply and high frequency DC to DC converters. Packaged in SOT93, TOP3I or TO247 this device is intended for use in low voltage, high frequency inverters, free wheeling and polarity protection applications.

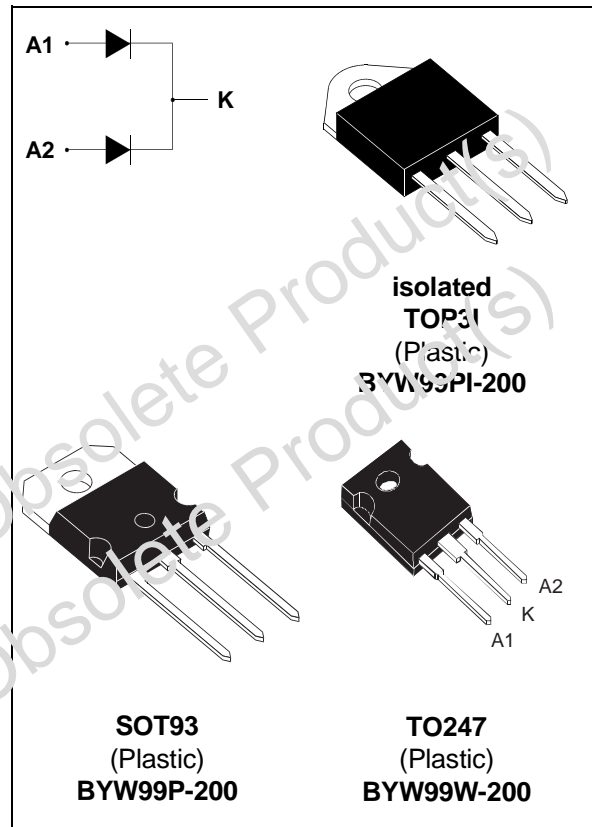

ABSOLUTE MAXIMUM RATINGS

| Symbol | Parameter | | | Value | Unit | |
|--------------------|---|---------------|---------------------------------|--------------------------------|--------------------------------------|---|
| $I_{F(RMS)}$ | R.M.S forward current | | | Per diode | 35 | A |
| $I_{F(AV)}$ | Average forward current $\delta = 0.5$ | SOT93 / TO247 | $T_c=120^\circ\text{C}$ | Per diode | 15 | A |
| | | TOP3I | $T_c=115^\circ\text{C}$ | Per diode | 15 | |
| I_{FSM} | Surge non repetitive forward current | | $t_p=10\text{ms}$ sinusoidal | Per diode | 200 | A |
| T_{stg} T_j | Storage and junction temperature range | | | - 40 to + 150 - 40 to + 150 | $^\circ\text{C}$ $^\circ\text{C}$ | |

| Symbol | Parameter | Value | Unit |
|-----------|---------------------------------|-------|------|
| V_{RRM} | Repetitive peak reverse voltage | 200 | V |

BYW99P/PI/W

THERMAL RESISTANCES

| Symbol | Parameter | | Value | Unit | |
|-----------|------------------|---------------|-----------|------|------|
| Rth (j-c) | Junction to case | SOT93 / TO247 | Per diode | 1.8 | °C/W |
| | | | Total | 1.0 | |
| | | TOP3I | Per diode | 2.0 | |
| | | | Total | 1.25 | |
| Rth (c) | Coupling | SOT93 / TO247 | 0.2 | °C/W | |
| | | TOP3I | 0.5 | | |

When the diodes 1 and 2 are used simultaneously :

$$T_j - T_c (\text{diode } 1) = P(\text{diode } 1) \times R_{th(j-c)} (\text{Per diode}) + P(\text{diode } 2) \times R_{th(c)}$$

STATIC ELECTRICAL CHARACTERISTICS (Per diode)

| Symbol | Test Conditions | | Min. | Typ. | Max. | Unit |
|-------------------|------------------------|-----------------------------------|------|------|------|------|
| I _R * | T _j = 25°C | V _R = V _{RRM} | | | 20 | μA |
| | T _j = 100°C | | | | 1.5 | mA |
| V _F ** | T _j = 125°C | I _F = 12 A | | | 0.85 | V |
| | T _j = 125°C | I _F = 25 A | | | 1.05 | |
| | T _j = 25°C | I _F = 25 A | | | 1.15 | |

Pulse test : * t_p = 50 ns, δ < 2 %

** t_p = 300 μs, δ < 2 %

To evaluate the conduction losses use the following equation :

$$P = 0.55 \times I_{F(AV)} + 0.016 \times I_{F(RMS)}^2$$

RECOVERY CHARACTERISTICS

| Symbol | Test Conditions | | Min. | Typ. | Max. | Unit |
|-----------------|-----------------------|---|------|------|------|------|
| trr | T _j = 25°C | I _F = 0.5A I _R = 1A | | | 25 | ns |
| | | I _F = 1A V _R = 30V | | | 40 | |
| tfr | T _j = 25°C | I _F = 1A V _{FR} = 1.1 x V _F | | 15 | | ns |
| V _{FP} | T _j = 25°C | I _F = 1A | | 2 | | V |

Fig.1 : Average forward power dissipation versus average forward current.

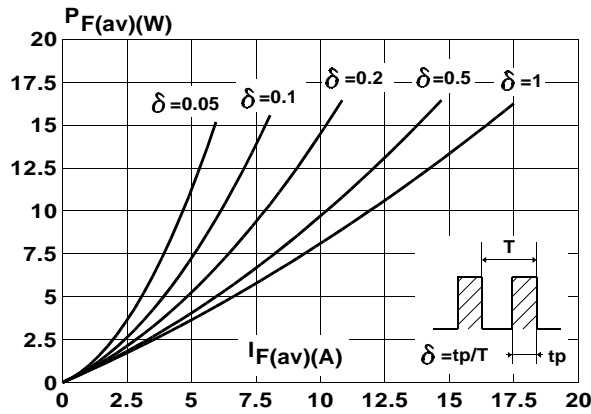


Fig.2 : Peak current versus form factor.

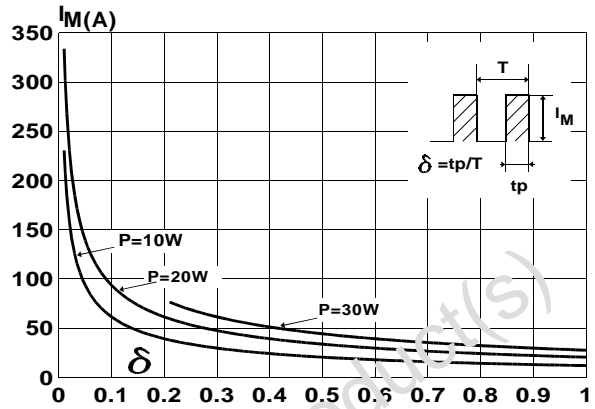


Fig.3 : Forward voltage drop versus forward current (maximum values).

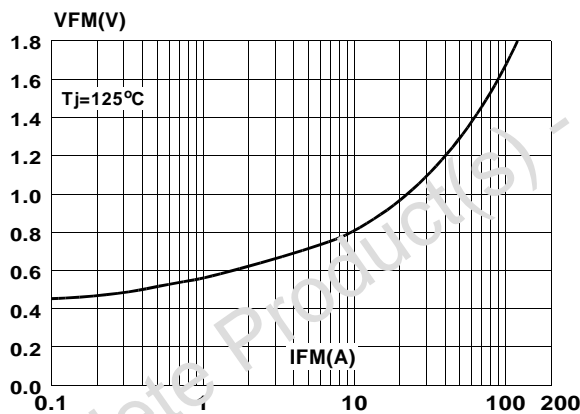


Fig.4 : Relative variation of thermal impedance junction to case versus pulse duration.

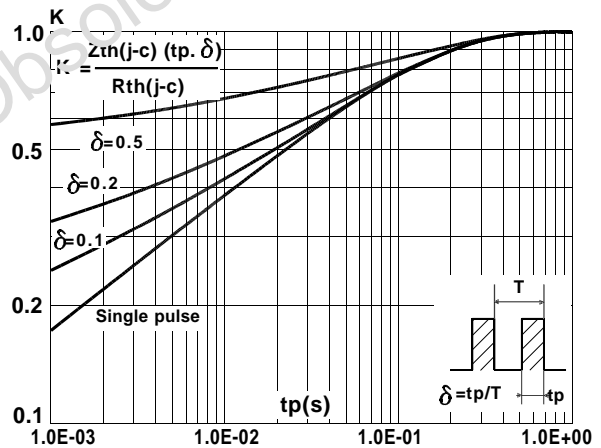


Fig.5 : Non repetitive surge peak forward current versus overload duration. (SOT93, TO247)

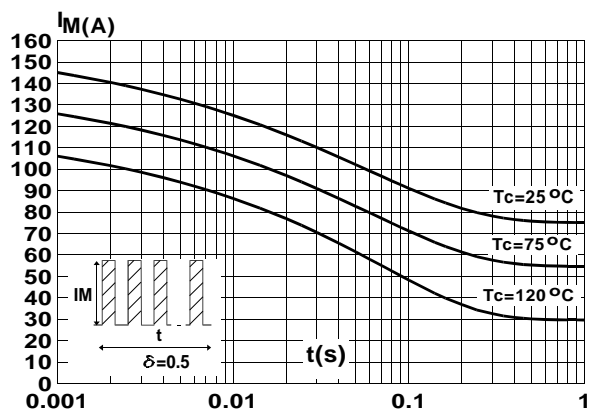


Fig.6 : Non repetitive surge peak forward current versus overload duration. (TOP31)

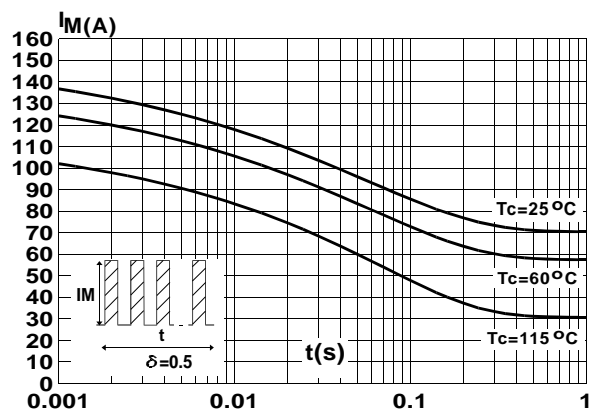


Fig.7 : Average current versus ambient temperature.
($\delta = 0.5$) (SOT93, TO247)

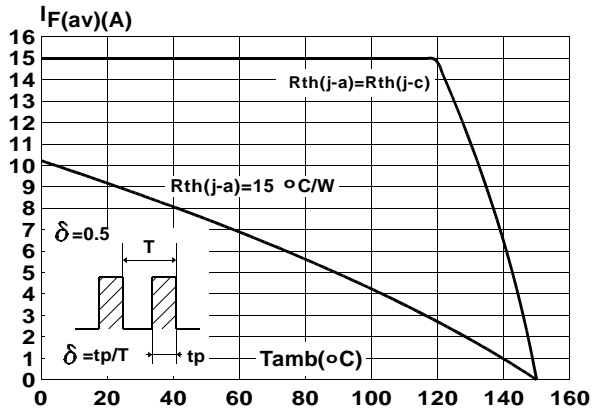


Fig.8 : Average current versus ambient temperature.
($\delta = 0.5$) (TOP3I)

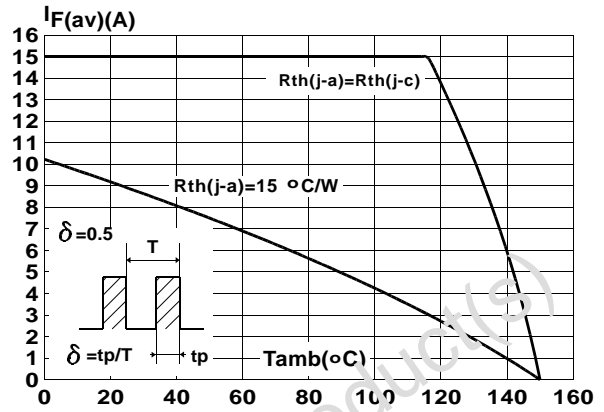


Fig.9 : Junction capacitance versus reverse voltage applied (Typical values).

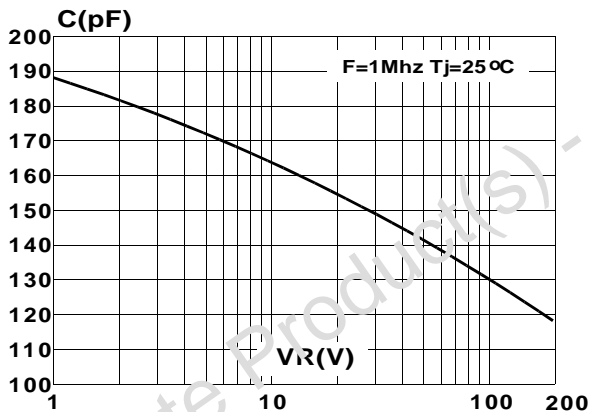


Fig.10 : Recovery charges versus dI_F/dt .

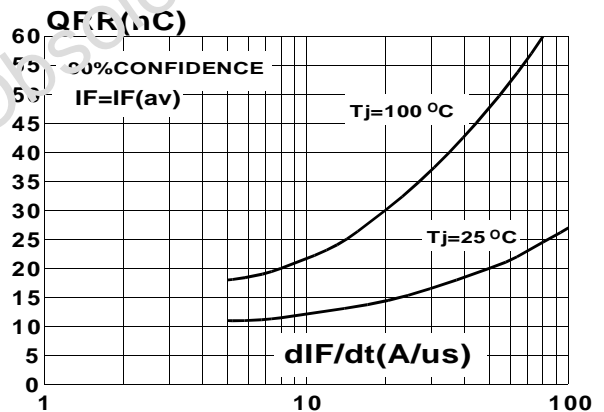


Fig.11 : Peak reverse current versus dI_F/dt .



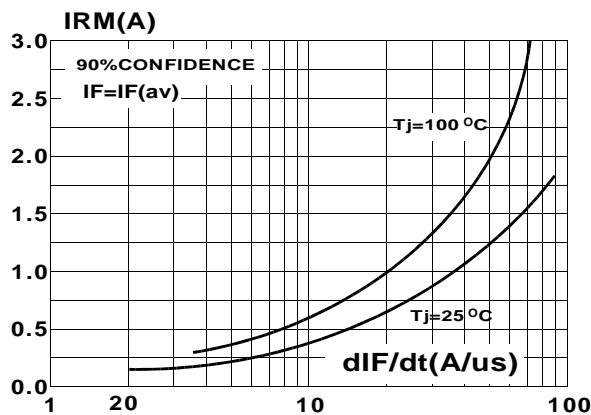


Fig.12 : Dynamic parameters versus junction temperature.

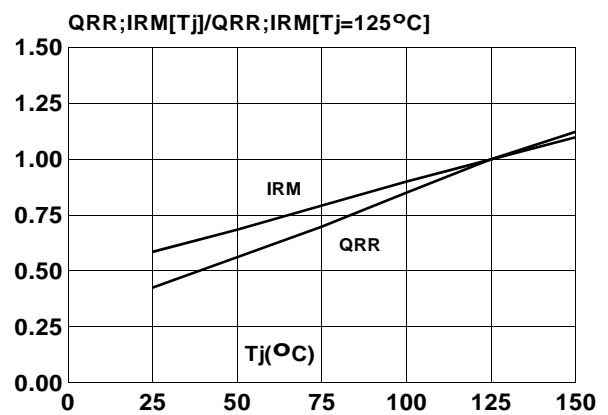


PACKAGE MECHANICAL DATA
SOT93

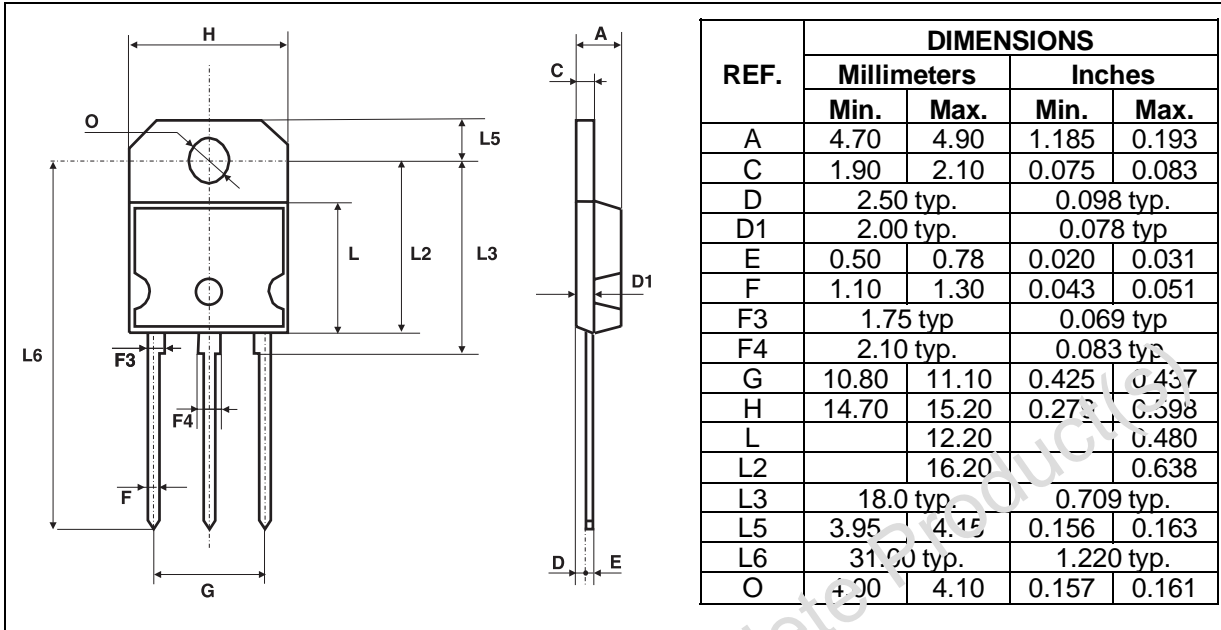

- **Marking** : Type number
- Cooling method : C
- Weight : 5.3 g
- Recommended torque value : 0.8m.N
- Maximum torque value : 1.0m.N

PACKAGE MECHANICAL DATA
TOP3I (isolated)

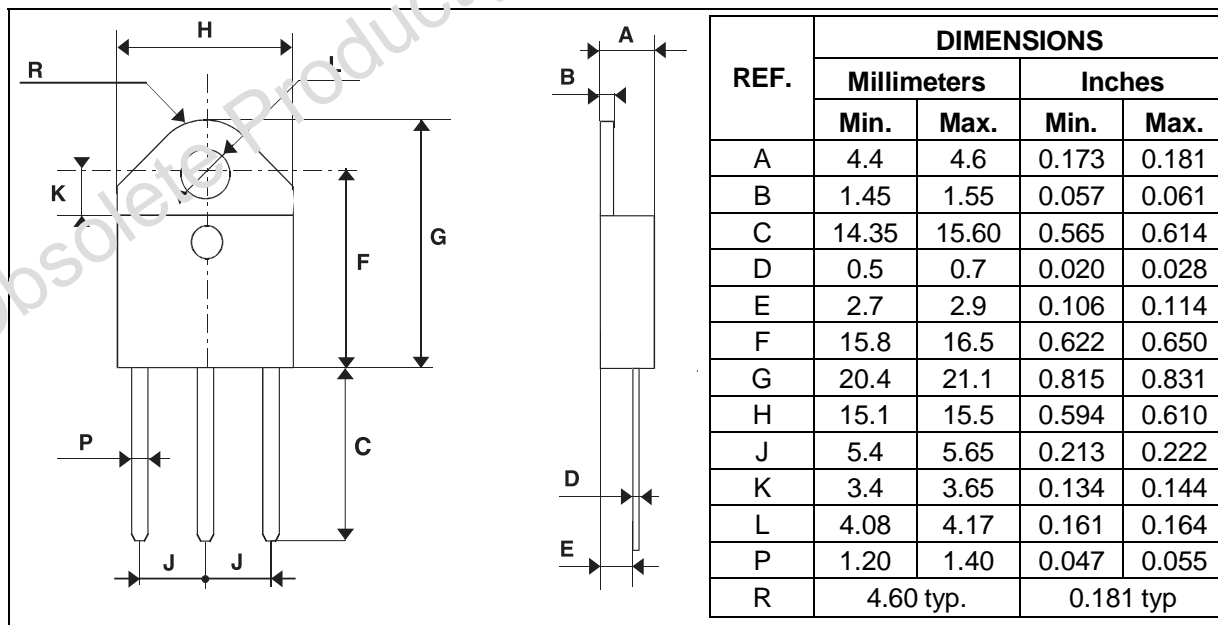


- **Marking** : Type number
- Cooling method : C
- Weight : 4.7 g
- Recommended torque value : 0.8m.N
- Maximum torque value : 1.0m.N



BYW99P/PI/W

PACKAGE MECHANICAL DATA
TO247

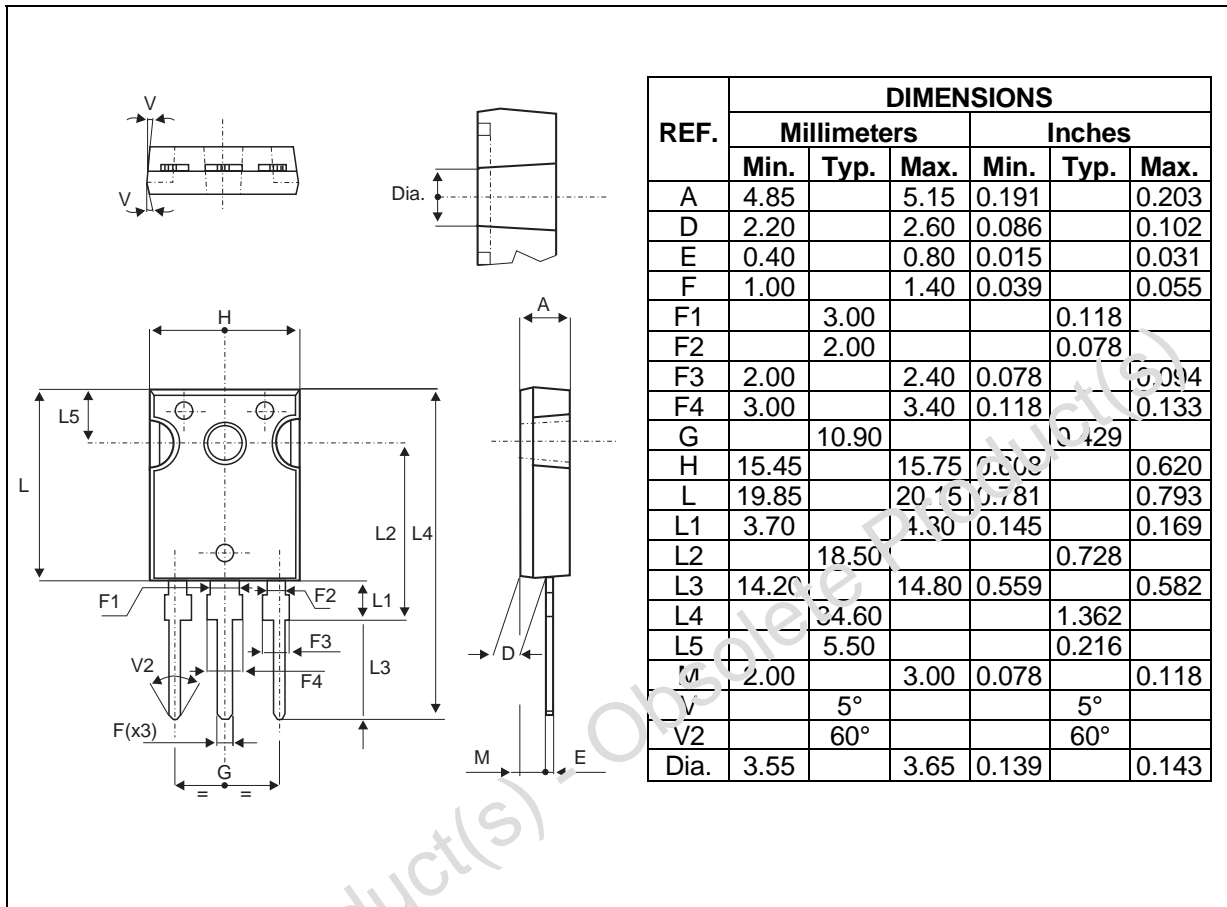

- **Marking** : Type number
- **Cooling method** : C
- **Weight** : 4.4 g
- **Recomm. lead torque value** : 0.8m.N
- **Maximum torque value** : 1.0m.N

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

© 1999 STMicroelectronics - Printed in Italy - All rights reserved.



STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia
Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - U.S.A.

<http://www.st.com>

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View BYW99P-200 on WIN SOURCE](#)
-  [STMicroelectronics](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management