




**THE DATASHEET OF
PME264NE6100MR30**



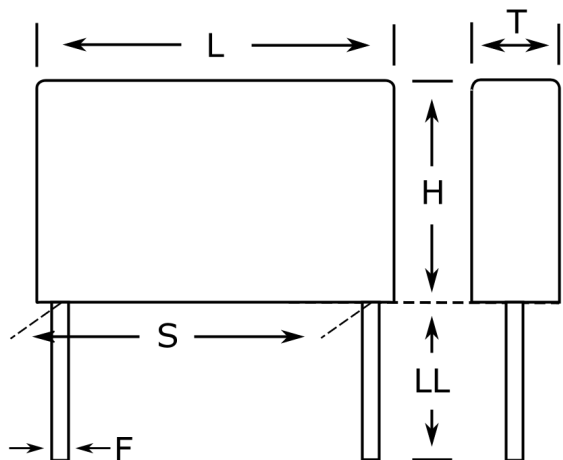

Click [here](#) for the 3D model.

Dimensions	
L	30.5mm MAX
H	22mm MAX
T	15.3mm MAX
S	25.4mm +/-0.4mm
LL	30mm +5mm
F	1mm NOM

Packaging Specifications	
Packaging	Bulk, Bag
Packaging Quantity	75

General Information	
Series	PME264/P264
Dielectric	Metallized Paper
Style	Radial
Features	EMI Safety
RoHS	Yes
Lead	Wire Leads
Safety Class	X2
Qualifications	ENEC, UL, cUL
AEC-Q200	No
THB Performance	No
Construction	Molded
Typical Component Weight	13.5 g

Specifications	
Capacitance	0.1 uF
Capacitance Tolerance	20%
Voltage AC	660 VAC (X2)
Voltage DC	1500 VDC
Temperature Range	-40/+85°C
Rated Temperature	85°C
Dissipation Factor	1.3% 1kHz
Insulation Resistance	12 GOhms
Max dV/dt	600 V/us

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View PME264NE6100MR30 on WIN SOURCE](#)

 [Kemet Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management