



**THE DATASHEET OF
PCF0603R-332RBT1**




Precision Thin Film Nichrome Chip Resistors



PCF Series

Features

- Precision thin film technology
- Extended ohmic range 1R - 3M
- Precision to $\pm 0.01\%$ and 1ppm/ $^{\circ}\text{C}$
- Passivated range for superior humidity performance
- Load life stability and humidity to 0.05%
- AEC-Q200 grade available

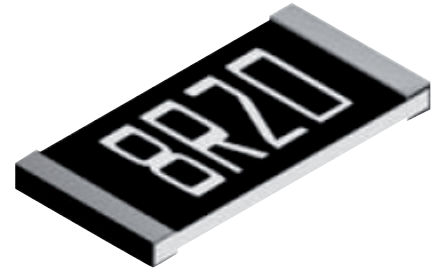

All parts are Pb-free and comply with EU Directive 2011/65/EU amended by (EU) 2015/863 (RoHS3)

Electrical Data - Standard Range

| Type | TCR (ppm/ $^{\circ}\text{C}$) | Power (W) | Limiting Element Voltage (V) | Ohmic Value Range ¹ | | | | | | | | | |
|---------|--------------------------------|-----------|------------------------------|--------------------------------|-------|---------|----------|-----------|----------|-------------|----------|------------|-----------|
| | | | | 1% & 0.5% | 0.25% | 0.1% | 0.05% | 0.01% | | | | | |
| PCF0201 | 50 | 0.031 | 15 | 49R9-33K | | | | | | | | | |
| | 25 | | | 49R9-5K | | | | | | | | | |
| PCF0402 | 50 | 0.063 | 25 | 10R-205K | | | | | | | | | |
| | 25 | | | | | | | | | 49R9-70K | 49R9-12K | | |
| | 15 | | | | | | | | | 49R9-12K | | | |
| | 10 | | | | | | | | | 49R9-5K | | 49R9-3K | |
| | 5 | | | | | | | | | 49R9 - 4K99 | | | |
| | 3 | | | | | | | | | 49R9-20K | | | |
| | 2 | | | | | | | | | | | | |
| 1 | | | | | | | | | | | | | |
| PCF0603 | 50 | 0.063 | 50 | 2R-1M | | 4R7-1M | 4R7-332K | | | | | | |
| | 25 | | | | | | | | 4R7-332K | | | | |
| | 15 | | | | | | | | | | | 24R9-15K | 24R9-100K |
| | 10 | | | | | | | | | | | 24R9 - 15K | |
| | 5 | | | | | | | | | | | | |
| | 3 | | | | | | | | | | | | |
| | 2 | | | | | | | | | | | | |
| 1 | | | | | | | | | | | | | |
| PCF0805 | 50 | 0.1 | 100 | 1R-2M | | 4R7-2M5 | 4R7-1M | 24R9-500K | | | | | |
| | 25 | | | | | | | | 4R7-1M | | | | |
| | 15 | | | | | | | | | | | 24R9-49K9 | |
| | 10 | | | | | | | | | | | 24R9-30K | |
| | 5 | | | | | | | | | | | | |
| | 3 | | | | | | | | | | | | |
| | 2 | | | | | | | | | | | | |
| 1 | | | | | | | | | | | | | |
| PCF1206 | 50 | 0.125 | 150 | 1R-2M5 | | 4R7-2M5 | 4R7-1M | 24R9-500K | | | | | |
| | 25 | | | | | | | | 4R7-1M | | | | |
| | 15 | | | | | | | | | | | 24R9-49K9 | |
| | 10 | | | | | | | | | | | 24R9-50K | |
| | 5 | | | | | | | | | | | | |
| | 3 | | | | | | | | | | | | |
| | 2 | | | | | | | | | | | | |
| 1 | | | | | | | | | | | | | |
| PCF1210 | 50 | 0.2 | 150 | 1R-2M5 | | 4R7-2M5 | 4R7-1M | 24R9-500K | | | | | |
| | 25 | | | | | | | | 4R7-1M | | | | |
| | 15 | | | | | | | | | | | 24R9-49K9 | |
| | 10 | | | | | | | | | | | 24R9-50K | |
| | 5 | | | | | | | | | | | | |
| | 3 | | | | | | | | | | | | |
| | 2 | | | | | | | | | | | | |
| 1 | | | | | | | | | | | | | |
| PCF2010 | 50 | 0.25 | 150 | 1R-3M | | 4R7-3M | 4R7-1M | 24R9-500K | | | | | |
| | 25 | | | | | | | | 4R7-1M | | | | |
| | 15 | | | | | | | | | | | 24R9-100K | |
| | 10 | | | | | | | | | | | 24R9-100K | |
| | 5 | | | | | | | | | | | | |
| | 3 | | | | | | | | | | | | |
| | 2 | | | | | | | | | | | | |
| 1 | | | | | | | | | | | | | |
| PCF2512 | 50 | 0.5 | 150 | 1R - 3M | | 4R7-3M | 4R7-1M | 24R9-500K | | | | | |
| | 25 | | | | | | | | 4R7-1M | | | | |
| | 15 | | | | | | | | | | | 24R9-100K | |
| | 10 | | | | | | | | | | | 24R9-100K | |
| | 5 | | | | | | | | | | | | |
| | 3 | | | | | | | | | | | | |
| | 2 | | | | | | | | | | | | |
| 1 | | | | | | | | | | | | | |

Note 1: Standard values E24 or E96. Other values may be available by request.

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

BI Technologies IRC Welwyn

www.ttelectronics.com/resistors

PCF Series

Electrical Data - AEC-Q200 Grade - Standard Range

| Type | TCR (ppm/°C) | Power (W) | Limiting Element Voltage (V) | Ohmic Value Range * | | | | |
|-------------|--------------|-----------|------------------------------|---------------------|------|-------|------------|-------|
| | | | | 1% | 0.5% | 0.25% | 0.1% | 0.05% |
| PCF0402...A | 50 | 0.063 | 25 | 49R9 – 100K | | | 49R9-10K | |
| | 25 | | | 49R9-69K8 | | | 49R9-10K | |
| | 15 | | | 49R9-69K8 | | | 49R9-10K | |
| | 10 | | | 49R9-10K | | | 49R9-10K | |
| PCF0603...A | 50 | 0.063 | 50 | 10R-332K | | | 10R – 49K9 | |
| | 25 | | | 10R-332K | | | 10R – 49K9 | |
| | 15 | | | 10R-332K | | | 10R – 49K9 | |
| | 10 | | | 10R-332K | | | 10R – 49K9 | |
| PCF0805...A | 50 | 0.1 | 100 | 10R-1M0 | | | 10R – 100K | |
| | 25 | | | 10R-1M0 | | | 10R – 100K | |
| | 15 | | | 10R-511K | | | 10R – 100K | |
| | 10 | | | 10R-511K | | | 10R – 100K | |
| PCF1206...A | 50 | 0.125 | 150 | 10R-1M0 | | | 10R – 200K | |
| | 25 | | | 10R-1M0 | | | 10R – 200K | |
| | 15 | | | 10R-1M0 | | | 10R – 200K | |
| | 10 | | | 10R-1M0 | | | 10R – 200K | |
| PCF1210...A | 50 | 0.25 | 150 | 10R-1M0 | | | 10R – 499K | |
| | 25 | | | 10R-1M0 | | | 10R – 499K | |
| | 15 | | | 10R-1M0 | | | 10R – 499K | |
| | 10 | | | 10R-1M0 | | | 10R – 499K | |
| PCF2010...A | 50 | 0.25 | 150 | 10R-1M0 | | | 10R – 499K | |
| | 25 | | | 10R-1M0 | | | 10R – 499K | |
| | 15 | | | 10R-1M0 | | | 10R – 499K | |
| | 10 | | | 10R-1M0 | | | 10R – 499K | |
| PCF2512...A | 50 | 0.5 | 150 | 10R-1M0 | | | 10R – 499K | |
| | 25 | | | 10R-1M0 | | | 10R – 499K | |
| | 15 | | | 10R-1M0 | | | 10R – 499K | |
| | 10 | | | 10R-1M0 | | | 10R – 499K | |

* Standard values E24 or E96.

Electrical Data – High Power Range

| Type | TCR (ppm/°C) | Power (W) | Limiting Element Voltage (V) | Ohmic Value Range * | | | | |
|----------|--------------|-----------|------------------------------|---------------------|-------|----------|-------|-----------|
| | | | | 0.5% | 0.25% | 0.1% | 0.05% | 0.01% |
| PCF0603H | 50 | 0.1 | 75 | 4R7-1M | | 4R7-332K | | 24R9-100K |
| | 25 | | | 4R7-332K | | 4R7-332K | | 24R9-100K |
| | 15 | | | 4R7-332K | | 4R7-332K | | 24R9-100K |
| | 10 | | | 4R7-332K | | 4R7-332K | | 24R9-100K |
| | 5 | | | 4R7-332K | | 4R7-332K | | 24R9-100K |
| | 3 | | | 4R7-332K | | 4R7-332K | | 24R9-100K |
| | 2 | | | 4R7-332K | | 4R7-332K | | 24R9-100K |
| PCF0805H | 50 | 0.125 | 150 | 1R-1M | | 4R7-1M | | 24R9-200K |
| | 25 | | | 4R7-332K | | 4R7-511K | | 24R9-200K |
| | 15 | | | 4R7-332K | | 4R7-511K | | 24R9-200K |
| | 10 | | | 4R7-332K | | 4R7-511K | | 24R9-200K |
| | 5 | | | 4R7-332K | | 4R7-511K | | 24R9-200K |
| | 3 | | | 4R7-332K | | 4R7-511K | | 24R9-200K |
| | 2 | | | 4R7-332K | | 4R7-511K | | 24R9-200K |
| PCF1206H | 50 | 0.25 | 200 | 4R7-1M | | 4R7-1M | | 24R9-500K |
| | 25 | | | 4R7-1M | | 4R7-1M | | 24R9-500K |
| | 15 | | | 4R7-1M | | 4R7-1M | | 24R9-500K |
| | 10 | | | 4R7-1M | | 4R7-1M | | 24R9-500K |
| | 5 | | | 4R7-1M | | 4R7-1M | | 24R9-500K |
| | 3 | | | 4R7-1M | | 4R7-1M | | 24R9-500K |
| | 2 | | | 4R7-1M | | 4R7-1M | | 24R9-500K |
| PCF1210H | 50 | 0.33 | 200 | 4R7-1M | | 4R7-1M | | 24R9-500K |
| | 25 | | | 4R7-1M | | 4R7-1M | | 24R9-500K |
| | 15 | | | 4R7-1M | | 4R7-1M | | 24R9-500K |
| | 10 | | | 4R7-1M | | 4R7-1M | | 24R9-500K |
| | 5 | | | 4R7-1M | | 4R7-1M | | 24R9-500K |
| | 3 | | | 4R7-1M | | 4R7-1M | | 24R9-500K |
| | 2 | | | 4R7-1M | | 4R7-1M | | 24R9-500K |
| PCF2010H | 50 | 0.33 | 200 | 4R7-1M | | 4R7-1M | | 24R9-500K |
| | 25 | | | 4R7-1M | | 4R7-1M | | 24R9-500K |
| | 15 | | | 4R7-1M | | 4R7-1M | | 24R9-500K |
| | 10 | | | 4R7-1M | | 4R7-1M | | 24R9-500K |
| | 5 | | | 4R7-1M | | 4R7-1M | | 24R9-500K |
| | 3 | | | 4R7-1M | | 4R7-1M | | 24R9-500K |
| | 2 | | | 4R7-1M | | 4R7-1M | | 24R9-500K |
| PCF2512H | 50 | 0.75 | 200 | 1R-2K | | 4R7-2K | | 24R9-2K |
| | 25 | | | 1R-2K | | 4R7-2K | | 24R9-2K |
| | 15 | | | 1R-2K | | 4R7-2K | | 24R9-2K |
| | 10 | | | 1R-2K | | 4R7-2K | | 24R9-2K |
| | 5 | | | 1R-2K | | 4R7-2K | | 24R9-2K |
| | 3 | | | 1R-2K | | 4R7-2K | | 24R9-2K |
| | 2 | | | 1R-2K | | 4R7-2K | | 24R9-2K |

* Standard values E24 or E96. Other values may be available by request.

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

PCF Series

Electrical Data - AEC-Q200 Grade – High Power Range

| Type | TCR (ppm/°C) | Power (W) | Limiting Element Voltage (V) | Ohmic Value Range * | | | | |
|--------------|--------------|-----------|------------------------------|---------------------|------|-------|------|-------|
| | | | | 1% | 0.5% | 0.25% | 0.1% | 0.05% |
| PCF0603H...A | 50 | 0.1 | 75 | 10R-332K | | | | |
| | 25 | | | | | | | |
| | 15 | | | | | | | |
| | 10 | | | | | | | |
| PCF0805H...A | 50 | 0.125 | 150 | 10R-1M0 | | | | |
| | 25 | | | | | | | |
| | 15 | | | | | | | |
| | 10 | | | | | | | |
| PCF1206H...A | 50 | 0.25 | 200 | 10R-511K | | | | |
| | 25 | | | | | | | |
| | 15 | | | | | | | |
| | 10 | | | | | | | |
| PCF1210H...A | 50 | 0.33 | 200 | 10R-1M0 | | | | |
| | 25 | | | | | | | |
| | 15 | | | | | | | |
| | 10 | | | | | | | |
| PCF2010H...A | 50 | 0.33 | 200 | 10R-499K | | | | |
| | 25 | | | | | | | |
| | 15 | | | | | | | |
| | 10 | | | | | | | |

* Standard values E24 or E96.

Electrical Data - Passivated Range

| Type | TCR (ppm/°C) | Power (W) | Limiting Element Voltage (V) | Ohmic Value Range * | | |
|----------|--------------|-----------|------------------------------|---------------------|-------|------|
| | | | | 0.5% | 0.25% | 0.1% |
| PCF0402P | 50 | 0.063 | 25 | 25R-25K | | |
| | 25 | | | | | |
| | 15 | | | | | |
| PCF0603P | 50 | 0.063 | 50 | 49R9-12K | | |
| | 25 | | | | | |
| | 15 | | | | | |
| PCF0805P | 50 | 0.1 | 100 | 25R-332K | | |
| | 25 | | | | | |
| | 15 | | | | | |
| PCF1206P | 50 | 0.125 | 150 | 10R - 1M | | |
| | 25 | | | | | |
| | 15 | | | | | |
| PCF2010P | 50 | 0.25 | 150 | 10R - 1M5 | | |
| | 25 | | | | | |
| | 15 | | | | | |
| PCF2512P | 50 | 0.5 | 150 | 25R - 1M | | |
| | 25 | | | | | |
| | 15 | | | | | |

* Standard values E24 or E96.


General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

PCF Series

Physical Data

| Dimensions (mm) and Weight (mg) | | | | | | |
|---------------------------------|-------------|-------------|-------|-------------|-------------|------|
| | L | W | T max | A | C | Wt |
| 0201 | 0.58 ± 0.05 | 0.29 ± 0.05 | 0.26 | 0.15 ± 0.05 | 0.12 ± 0.05 | 0.14 |
| 0402 | 1.0 ± 0.1 | 0.5 ± 0.05 | 0.55 | 0.25 ± 0.15 | 0.2 ± 0.15 | 0.54 |
| 0603 | 1.6 ± 0.2 | 0.8 ± 0.2 | 0.65 | 0.35 ± 0.25 | 0.3 ± 0.2 | 1.8 |
| 0805 | 2.0 ± 0.2 | 1.25 ± 0.2 | 0.65 | 0.4 ± 0.25 | 0.3 ± 0.2 | 4.7 |
| 1206 | 3.05 ± 0.15 | 1.55 ± 0.15 | 0.65 | 0.35 ± 0.25 | 0.42 ± 0.2 | 9.0 |
| 1210 | 3.10 ± 0.15 | 2.5 ± 0.25 | 0.65 | 0.55 ± 0.25 | 0.4 ± 0.3 | 10 |
| 2010 | 4.9 ± 0.2 | 2.4 ± 0.25 | 0.65 | 0.55 ± 0.3 | 0.6 ± 0.3 | 24 |
| 2512 | 6.3 ± 0.2 | 3.1 ± 0.25 | 0.65 | 0.7 ± 0.45 | 0.6 ± 0.3 | 38 |

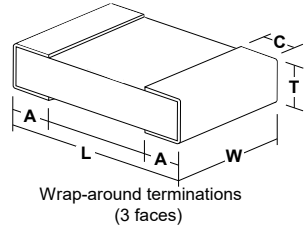

Construction

A thin-film material is selectively deposited on a 96% alumina substrate together with metallic contacts at each end of the resistor. The unadjusted resistors are heat treated to give the required TCR and stability, then a precisely controlled laser trim process adjusts the resistance value. Epoxy protection is applied and wrap-around terminations are added and plated with Nickel then Tin. Each resistor is measured immediately before packing into tape.

Performance Data - Standard Range

| Test Parameters | Conditions | Maximum change (+0.05R) | | |
|----------------------------|-------------------------------------------|----------------------------------|-------------------------|----------------------------------|
| | | >0.05% tolerance 0603 to 2512 | Chip size 0201, 0402 | ≤0.05% tolerance 0603 to 2512 |
| Load life | 1000 hours rated load @ 70°C | 0.25% | 0.5% | 0.05% |
| Humidity | 1000 hours @ 40°C, 90 - 95%RH | 0.3% | 0.3% | 0.05% |
| Short term overload | 6.25 x rated Power, or 2 x LEV, for 5 sec | 0.5% | 0.5% | 0.05% |
| High temperature operation | 1000 hours at 125°C | 0.25% | 0.25% | 0.25% |
| Temperature cycle | 5 cycles -55 C, 125°C | 0.1% | 0.1% | 0.05% |
| Resistance to solder heat | 270°C, 10 sec | 0.2% | 0.2% | 0.05% |
| Solderability | 235°C, 2 sec | 95% minimum coverage | | |

Performance Data - High Power Range

| Test Parameters | Conditions | Maximum change (+0.05R) |
|----------------------------|-------------------------------------------|-------------------------|
| Load life | 1000 hours rated load @ 70°C | 0.5% |
| Humidity | 1000hrs @ 40°C, 90 - 95%RH | 0.5% |
| Short term overload | 6.25 x rated Power, or 2 x LEV, for 5 sec | 0.5% |
| High temperature operation | 1000 hours at 155°C | 0.5% |
| Temperature cycle | 5 cycles -55°C, 150°C | 0.25% |
| Resistance to solder heat | 270°C, 10 sec | 0.2% |
| Solderability | 235°C, 2 sec | 95% minimum coverage |

General Note


TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

PCF Series

Performance Data - Passivated Range

| Test Parameters | Conditions | Maximum change (+0.05R) | |
|----------------------------|-------------------------------------------|-------------------------|-------|
| | | 0603 to 2512 | 0402 |
| Load life | 1000 hours rated load @ 70°C | 0.05% | 0.25% |
| Humidity | 1000hrs @ 40°C, 90 - 95%RH | 0.05% | 0.5% |
| Short term overload | 6.25 x rated Power, or 2 x LEV, for 5 sec | 0.02% | 0.1% |
| High temperature operation | 1000 hours at 125°C | 0.05% | 0.5% |
| Temperature cycle | 5 cycles -55 C, 125°C | 0.02% | 0.1% |
| Resistance to solder heat | 270°C, 10 sec | 0.02% | 0.1% |
| Solderability | 235°C, 2 sec | 95% minimum coverage | |

Derating Curve

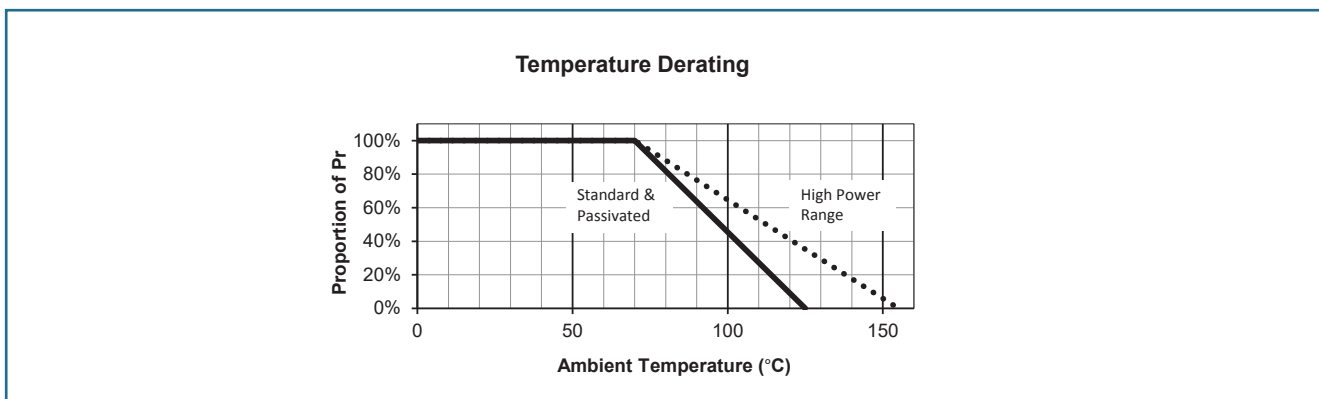

Solderability

The terminations have an electroplated nickel barrier and tin coating. This ensures excellent 'leach' resistance properties and solderability.

Packaging

PCF Resistors are supplied taped and reeled as per IEC 286-3. Sizes 2010 and 2512 are in embossed plastic tape. Smaller sizes are in paper tape.

Application Notes

PCF resistors are ideally suited for handling by automatic methods due to their rectangular shape and the small dimensional tolerances. Electrical connection to a ceramic substrate or to a printed circuit board can be made by reflow or wave soldering of wrap-around terminations.

Wrap-around terminations provide good leach properties and ensure reliable contact. Due to the robust construction, the PCF can be immersed in the solder bath for 30 seconds at 260°C. This enables the resistor to be mounted on one side of a printed circuit board and wire-leaded components applied on the other side.

PCF resistors themselves can operate at a maximum temperature of 125°C (see performance above) (155°C for High Power grades). For soldered resistors, the joint temperature should not exceed 110°C. This condition is met when the stated power levels at 70°C are used.

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

PCF Series

Ordering Procedure

This product has two valid part numbers:

European (Welwyn) Part Number:** PCF0603-11-1K54BI (0603, standard, 15ppm/°C, 1.54 kilohm ±0.1%, Pb-free)

| | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| P | C | F | 0 | 6 | 0 | 3 | - | 1 | 1 | - | 1 | K | 5 | 4 | B | I |
| 1 | 2 | | 3 | 4 | | 5 | | | 6 | 7 | | | | | | |

| 1 | 2 | 3 | 4 | 5 | 6 | 7 | |
|------|------|-------------------|-----------------|----------------------|------------|--------------------------------------------|-------------|
| Type | Size | Range | TCR | Value | Tolerance | Grade, Packing & Termination | |
| PCF | 0201 | Omit for Standard | -21 = ±1ppm/°C | E24 = 3/4 characters | L = ±0.01% | A = AEC-Q200 grade, Standard pack, Pb-free | |
| | 0402 | | -20 = ±2ppm/°C | E96 = 3/4 characters | W = ±0.05% | I = Standard grade, Standard pack, Pb-free | |
| | 0603 | H = High Power | -19 = ±3ppm/°C | R = ohms | B = ±0.1% | 0201, 0402 | 10,000/reel |
| | 0805 | P = Passivated | -13 = ±5ppm/°C | K = kilohms | C = ±0.25% | 0603 to 1210 | 5000/reel |
| | 1206 | | -12 = ±10ppm/°C | M = megohms | D = ±0.5% | 2010, 2512 | 4000/reel |
| | 1210 | | -11 = ±15ppm/°C | | F = ±1% | A1 = AEC-Q200 grade, 1K reel, Pb-free | |
| | 2010 | | R = ±25ppm/°C | | | T1 = Standard grade, 1K reel, Pb-free | |
| | 2512 | | -02 = ±50ppm/°C | | | 0201 to 1206, 2010, 2512 | 1000/reel* |

* Non-standard; enquire to confirm availability

** Applies to all Ranges, Termination and Packing options.

USA (IRC) Part Number*: PCF-W0603LF-11-1541-B-P-LT (0603, standard, 15ppm/°C, 1.54 kilohm ±0.1%, Pb-free)

| | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| P | C | F | - | W | 0 | 6 | 0 | 3 | L | F | - | 1 | 1 | - | 1 | 5 | 4 | 1 | - | B | - | P | - | L | T |
| 1 | 2 | | | | 3 | 4 | | 5 | | | 6 | 7 | 8 | | | | | | | | | | | | |

| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | |
|------|-------|--------------------------|----------------|----------------------------------|------------|------------------------------|------------------|-------------|
| Type | Model | Termination | TCR | Value | Tolerance | Tape | Packing | |
| PCF | W0201 | LF = Pb-free (100%Sn) | 13 = ±5ppm/°C | 3 digits + multiplier | T = ±0.01% | P = Paper (0201 to 1210) | LT = Tape & Reel | |
| | W0402 | | 12 = ±10ppm/°C | R = ohms for values <100 ohms | A = ±0.05% | | 0201, 0402 | 10,000/reel |
| | W0603 | | 11 = ±15ppm/°C | | B = ±0.1% | E = Embossed (2010, 2512) | 0603 to 1210 | 5000/reel |
| | W0805 | | 03 = ±25ppm/°C | | C = ±0.25% | | 2010, 2512 | 4000/reel |
| | W1206 | | 02 = ±50ppm/°C | | D = ±0.5% | | | |
| | W1210 | | | | F = ±1% | | | |
| | W2010 | | | | | | | |
| | W2512 | | | | | | | |



* Applies only to Standard Range parts

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.
All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View PCF0603R-332RBT1 on WIN SOURCE](#)
-  [TT Electronics Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management